

PM MEMS ATTENUATOR

DiCon's PM MEMS Attenuator is based on a micro-electro-mechanical system (MEMS) chip. The PM MEMS chip consists of an electrically movable mirror on a silicon support. A voltage applied to the PM MEMS chip causes the mirror to rotate, which changes the coupling of light between the input and output fibers of the PM MEMS Attenuator.



FEATURES

- Small attenuator package
- Based on DiCon's proven MEMS platform
- Available in opaque or transparent versions
- Qualified to GR-1221
- High Extinction Ratio

APPLICATIONS

PM MEMS Attenuators are used for distributed power equalization within OADMs, MUX/DMUXes, Band Equalizers, Channel Equalizers, Optical Cross-Connects, Line Cards and Transponders. Polarization Maintaining Attenuators can also be used for power adjustment in polarization sensitive devices such as modulators.



PM MEMS ATTENUATOR

OPTICAL SPECIFICATIONS¹


PARAMETER		RATING	
Excess Loss		0.8 dB max	
WDL	Broad Band Application	0 to 15 dB	0.7 dB max.
		15 to 20 dB	1.0 dB max.
	Narrow Band Application ²	0 to 15 dB	0.3 dB max.
		15 to 20 dB	0.4 dB max.
Extinction Ratio		18 dB min.	
Attenuation Slope		20 dB/V max.	
Back Reflection		-50 dB max.	
Optical Power		500 mW max.	
Response Time		2 ms max.	
Repeatability ³		0.1 dB max.	
Durability		1 x 10 ⁹ cycles min.	
Fiber Type		Panda 400 or equivalent	
Operating Temperature		-5°C to +70°C	
Storage Temperature		-40°C to +85°C	

1. All Specifications at room temperature, without connectors
2. Maximum change of each 2 nm segment within the operating range
3. Repeatability is defined after 100 cycles

ELECTRICAL SPECIFICATIONS

PARAMETER	RATING
Actuation type	Non-latching
DC Drive Voltage	0-5 VDC (7 V for opaque)
Voltage Damage Threshold	10 VDC max.
Resistance	2 MΩ min.
Power Consumption	20 uWatt max.

OPTICAL PERFORMANCE

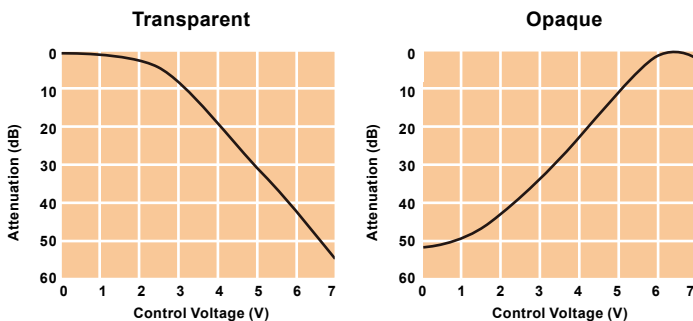

ORDERING INFORMATION

MT-C-□-15-□-□-□-4B-□-□-□

Housing Type

C Cylindrical

Attenuator Type

T Transparent¹

O Opaque²

Operating Wavelength Range

15 1528 - 1563 nm

Attenuator Range

20 20 dB min.

X Specify X dB min. (X <= 40)

Ripple Type

S Slow ripple (broad band)

F Fast ripple (narrow band)

Connector Key Orientation

PMF Fast axis

PMS Slow axis

PMN No connector

Fiber / Jacket Type

4B 9/125 μm Panda fiber with 400 μm buffer

Connector Type

FC FC/SPC

FC/APC FC/APC

X specify connector type³

N None

Pigtail Length

1 1 meter

X Specify X meters

Pin Bending

S Straight Pins

B Bent Pins


1. Minimum insertion loss at 0 V.

2. Minimum insertion loss at 6 - 7 V (high isolation at 0 V).

3. Connector Types: FC/UPC, SC, SC/APC, SC/UPC, LC, LC/UPC, MU/UPC.

MECHANICAL DIMENSIONS

Straight Pins

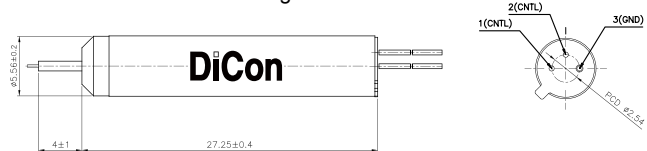

Bent Pins

