

## 12GHz RF over Fiber Mini-L Low Noise High SFDR



### Key Features

- Frequency Range: 0.1—12GHz
- Low Noise RToF HSFDR version
- Low spurious level
- High SFDR 112 dB/Hz
- Excellent Phase Noise
- Excellent phase linearity

### Configurations

- Standard (stand-alone)
- 1U Generic enclosure (4 units)
- 1U Removable panel enclosure (2/4 units)
- Outdoor (2/4 units)

### Applications

- Distributed Antenna
- Satcom
- Radio telescopes
- Telecommunication:
  - Antenna Remoting
  - Long RF links via fiber
- Electronic Warfare (EW)

### Options

- Customized RF Gain, P1dB, Noise Figure by adding internal Pre & Post amplifier(s)
- Extended low-frequency bandwidth

RFOptic's compact, analog RToF modules enable long distance transmission of wideband RF signals. The Tx unit's optical transmitter converts wideband RF signals to an RToF Optical signal; the Rx unit converts the received RToF Optical signal back to RF. The two units are connected by a single mode fiber.

In general, a wide, spurious-free dynamic range (SFDR) is desirable when multiple signals of very different power levels are expected. High SFDR transmission of RToF simplifies signal conditioning needed to avoid signal saturation. For example, during antenna testing, radar or communications system testing, high SFDR is essential due to the typically large amplitude ratios between the main and sideband lobes or between near and distant targets. The same applies to DF/ELINT systems that have to handle strong jammers concurrent with weak signals of interest.

RFOptic's 12, 18, 20, 30, and 40 GHz RToF solutions provide high SFDR of 111 dB/Hz (minimum). Due to their improved Noise Figure, an additional pre-amplifier may not be necessary. These high-performance products are used in applications such as civil communication, antenna remoting, telemetry, defense systems, satellite communications, and more.

The best low noise performance is offered by our LN (Low Noise) solutions which offer a lower compression level than the Q (standard) solutions.

## RFoF-12GHz-L0-Mini Low Noise High SFDR Specifications

RF Parameter RF Tx-Rx Link	Unit	Specification (typical)
Frequency Range <sup>[1]</sup>	GHz	0.1 — 12
RF Gain <sup>[2,3]</sup>	dB	(-)18
Gain Flatness for the entire frequency range <sup>[5]</sup>	dB	±1.3
1dB compression point <sup>[3]</sup>	dBm	10
Noise Figure <sup>[2,3]</sup>	dB	24
SFDR (calculated) <sup>[3,4]</sup>	dB/Hz <sup>2/3</sup>	113
Maximum RF input level (No damage)	dB	16
VSWR Input	—	2:1
VSWR Output	—	2:1
Spurious <sup>[5]</sup>	dBm	≤ (-)95
Phase Noise at 10KHz offset	dBc/Hz	≤ (-)120
Input / Output impedance	Ohm	50
<b>Optical and Electrical and Environmental (Tx, Rx)</b>		
Laser diode optical wavelength	µm	1.55
Receiver photodiode optical wavelength	µm	1.5 — 1.58
Monitor – Tx/Rx units	—	—
Operating temperature range	°C	0 — 70
Storage temperature	°C	(-)40 — 85
LED status indicators (Tx/Rx)	—	Blue/Green/Red
Input voltage <sup>[6]</sup>	VDC	5
Power consumption Tx module <sup>[5,7]</sup>	Watt	2.5
Power consumption Rx module <sup>[5,7]</sup>	Watt	0.5
<b>Mechanical (Tx/Rx)</b>		
Dimensions Tx/Rx unit	mm	75*154*33
Weight Tx/Rx unit	grams	450
RF Input / Output connectors	mm	SMA
Optical Connector	—	FC/APC
Power connector and Data/monitor connector <sup>[8]</sup>	—	DB15

[1] Extended low frequency 0.01 — 12.0 GHz is optional.

[2] Excluding customer fiber loss.

[3] Measured at 10GHz. Gain, P1dB, and typical NF values for RFoF HSFDR with pre/post amplifiers are shown in the table on page 3.

[4] Excluding in-band harmonics. SFDR (calculated)  $\approx 2/3 \times [(IP1dB+10)+174-NF]$  dB/Hz<sup>2/3</sup>.

[5] Spur levels of the link without pre/post amplifiers. Spur levels with a 19dB pre-amp are under (-)90dBm. Spur levels with a 17dB post-amp are about (-)78dBm; with a 30dB post-amp they are about (-)65dBm. Each amp adds about ±1.5dB to gain flatness and about 3.5W to module power consumption.

[6] See table on page 3 for RFoF enclosure options.

[7] Recommended Power Supplies: Meanwell P/N GSM25U05-P1J (USA); GSM25E05-P1J (Europe); GE40I05-P1J (all purpose).

[8] For USB monitor, download the software here: <https://rfoptic.com/software-download-rfof/> (Ask your local representative for the password.)

[9] For RFoF Tx modules with integrated pre-amplifier, the maximum ambient operating temperature is reduced to 60°C.

[10] Extended operating temperature ranges of (-)20°C—70°C or (-)45°C—70°C are available upon request.

### RFoF 12GHz Module Options

Parameter	Unit	HSFDR 12GHz Transceiver	HSFDR 12GHz Transceiver with Pre-Amp	HSFDR 12GHz Transceiver with Post-Amp	HSFDR 12GHz Transceiver with Pre- and Post-Amp
P/N	-	RFoF-12GHz-L0-Mini	RFoF-12GHz-L1-Mini	RFoF-12GHz-L0-Mini-P	RFoF-12GHz-L2-Mini
Gain*	dB	(-)18	0	12	16
Input P1dB*	dBm	10	(-)9	10	(-)9
Noise Figure*	dB	24	9	25	10
SFDR*	dBc/Hz	113	111	113	110


\* For HSFDR units integrated in indoor or outdoor enclosures: NF and P1dB values increase by ~2dB; gain decreases by ~2dB.

HSFDR RFoF 12GHz, April 2024




Tel. Int.: +972-76-540 0771 • Tel. USA: +1 708 RFOPTIC, 21 Yegia Kapaim, Building C, 3rd Floor 4913020 Petah Tikva, Israel

[www.rfoptic.com](http://www.rfoptic.com)

### RFoF 12GHz – Simplified Block Diagram

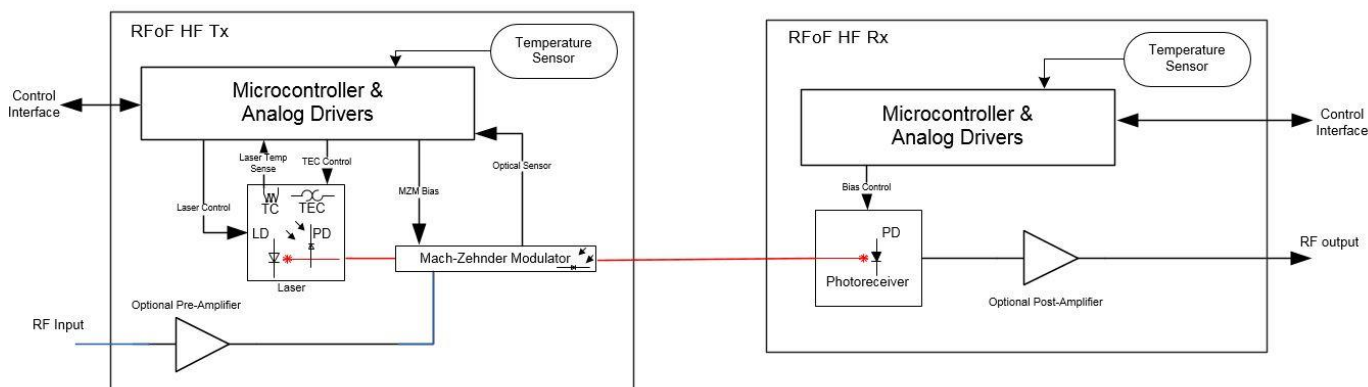

### RFoF Low NF 12GHz – Typical Test Results

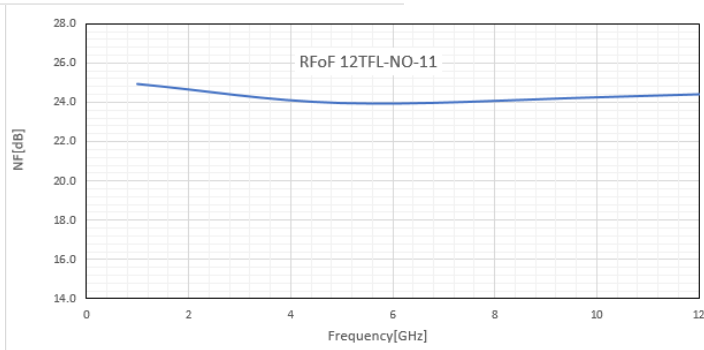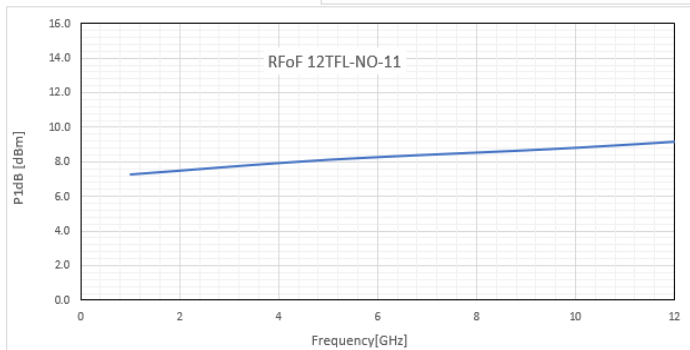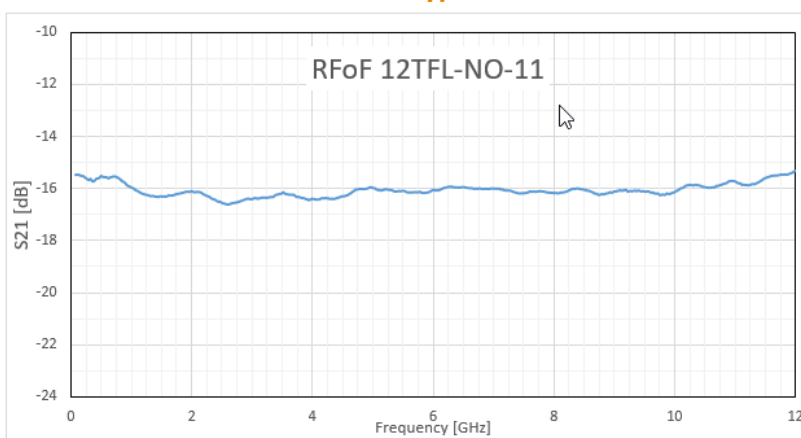

### RFoF Enclosure Options

Parameter	19" 1U Enclosure for RFoF	Outdoor Enclosure for RFoF
Dimensions (mm)	19" 1U Generic: 445(W)* 476(L)*44(H) 19" 1U Removable: 442(W)* 402(L)*44(H)	Small Outdoor: 270(W)*230(L)*85(H) Large Outdoor: 330(W)*350(L)*85(H)
RF Input / Output Connector	SMA female	N Type female
Optical Connector	FC/APC or SC/APC	MPO/APC 4/8 male <sup>[1]</sup>
Data Connector	USB2/RJ45	RJ45 female <sup>[2]</sup>
Power Connector	HP Socket	DC female/ AC male <sup>[2,3]</sup>
Power	110 / 220 VAC	9—36VDC / 110/220VAC <sup>[2,3]</sup>

[1] MPO 4/8 optical cable (female) should be ordered by the customer according to the required length and conditions.


**Example:** GoFoton: P/N BPF3P1SM015FLR020 (4 fibers) / BPF3P1FM015FLR021 (8 fibers). XXX = 015m fiber length.

[2] IP-54 Data, AC and DC opposite connectors are provided as accessories with the module (cables are not included).


[3] DC and AC versions of the outdoor enclosures are available.

## Mechanical Outline Drawing - 12GHz RFoF Tx and Rx modules

### Tx module

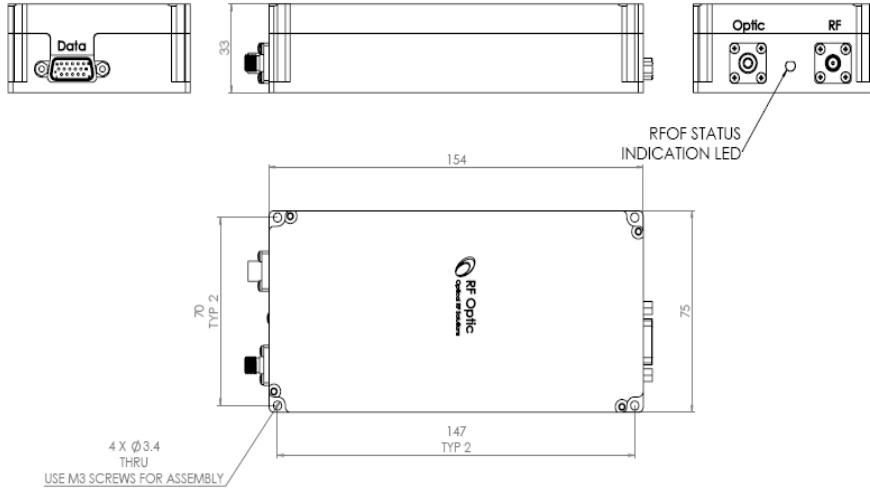

### Rx module

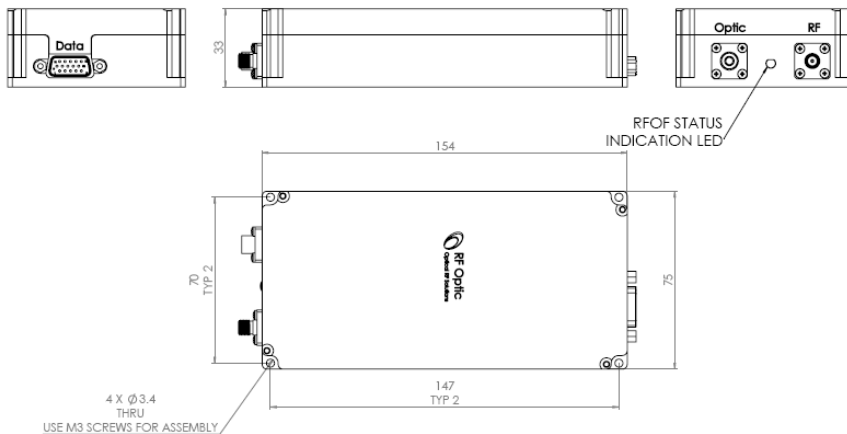

### Ordering Information

P/N	Description	Tx	Rx
<b>RFoF-12G-L0-Mini</b>	Transceiver 12GHz, HSFDR	RFoF12TFL-N0-11	RFoF12RFL-N0-11
<b>RFoF-12G-L1-Mini</b>	Transceiver 12GHz, HSFDR with pre-amp	RFoF12TFL-A0-11	RFoF12RFL-N0-11
<b>RFoF-12G-L0-Mini-P</b>	Transceiver 12GHz, HSFDR, with post-amp	RFoF12TFL-N0-11	RFoF12RFL-A1-11
<b>RFoF-12G-L2-Mini</b>	Transceiver 12GHz, HSFDR, with pre & post-amp	RFoF12TFL-A0-11	RFoF12RFL-A0-11
<b>HSFDR-Cable-Data-DC</b> <sup>[1]</sup>	2 X D15 to USB 150cm & D15 to DC 25cm special cable	For stand-alone HSFDR link	
<b>Outdoor Data &amp; AC set</b> <sup>[2]</sup>	Data and 110 / 220 AC opposite connectors – accessories	For outdoor enclosure with AC supply	
<b>Outdoor Data &amp; DC set</b> <sup>[2]</sup>	Data and 5VDC opposite connectors – accessories	For outdoor enclosure with DC supply	

[1] Accessory for HSFDR stand-alone link — supplied with the RFoF-12G-L0-Mini.

[2] Accessories / connectors for Outdoor enclosure — supplied with the RFoF-12G-L0-Mini.