



STR2450 Series, 500W, DBS-Band, Rack Mount TWTA

The new generation of STR Series rack mount TWTA's provide an easy to operate, colour touch screen interface with a multi-functional selector wheel. The colour touch screen display provides clear, easy to read status of the amplifier's operation, including: RF output power monitoring, heater, helix monitoring, & TWT temperature. Set up screens are intuitive and simple to manage and the touch panel allows full local control and monitoring of all amplifier parameters, including automatic level control, system event logging and graphical trend analysis. Remote control operation can be made via RS485 or through an Ethernet interface, and a web page interface is also available. If a redundancy system is required, this can be set up and controlled via the touch screen. Changes to operating parameters can be locked and password protected if required.

The HPA incorporates a high efficiency multi-collector TWT powered by an advanced power supply built on over 30 years of experience in the design and manufacture of satellite amplifiers. The company's products have an enviable reputation for performance, robust quality and reliable service.

The STR2450 is available with a wide range of options and accessories, backed by worldwide technical support.


Options

- Integral solid-state amplifier (SSA)
- L-Band Block upconverter
- 10MHz reference
- Lineariser
- Redundant system control
- Quick connect waveguide options

Features

- Compact 4RU enclosure
- Touch screen control
- Ethernet interface
- Remote diagnostics
- Forward and reverse power monitoring
- TWTA performance Data and Event logging

BLOCK DIAGRAM

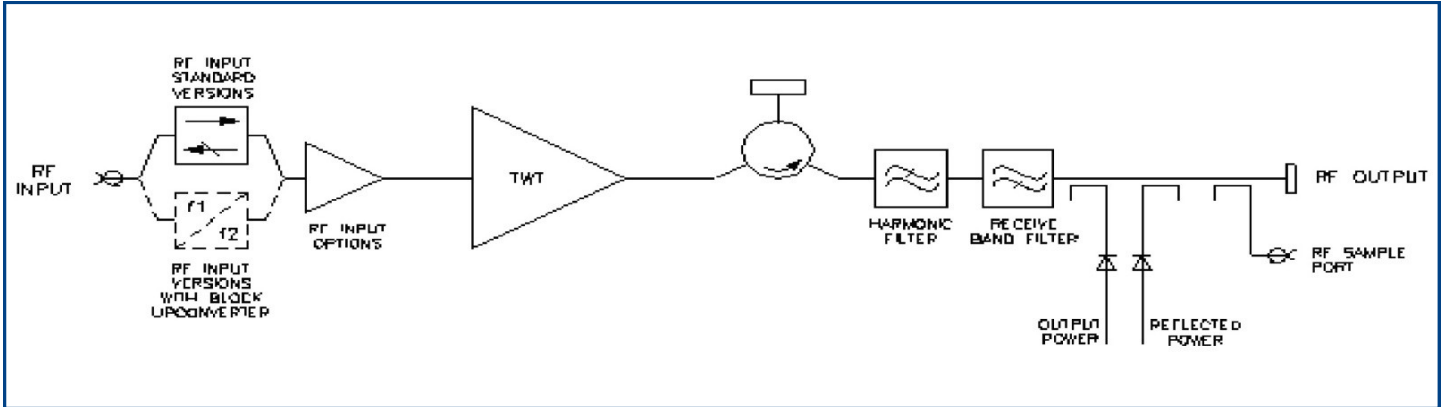

PERFORMANCE (Without Upconverter)

Frequency range:		
Standard - DB1.....	17.3 to 18.1	GHz
Extended - DB2.....	17.3 to 18.4	GHz
Output Power:		
TWT output flange (peak).....	500	W min
HPA rated output (CW).....	420	W min
Gain:		
At rated power (A,D, Z option).....	70	dB min
SSG P_{rated} - 10dB (A,D,Z option).....	75	dB min
Attenuation range (D,Z option).....	25	dB min
Gain Variation:		
Full Band.....	4.0	dB max
Over any 500 MHz band.....	2.5	dB max
Over any 80 MHz band.....	1.0	dB max
Slope.....	0.08	dB/MHz max
Gain stability 24hrs (constant drive, temperature and load).....	0.5	dB max
Gain stability over full operating temperature.....	2.0	dB max
Intermodulation (two equal carriers) with total output = P_{rated} -4dB:		
Options A, D.....	-18	dBc max
Performance with linearised option, Z.....	-24	dBc max
Harmonic output.....	-60	dBc max
AM to PM conversion at P_{rated} -6dB.....	2.5	°/dB
Noise Power:		
Transmit band.....	-70	dBW/4 kHz max
Receive band (10.95 - 12.75GHz).....	-150	dBW/4 kHz max
Residual AM:		
<10kHz.....	-50	dBc max
10kHz < f < 500kHz.....	-20 (1.5+ log f)	dBc max
>500kHz.....	-85	dBc max
Group delay:		
Linear.....	0.01	ns/MHz
Parabolic.....	0.005	ns/MHz ²
Ripple.....	0.5	ns p-p
Phase Noise:		
Continuous.....	10dB lower than IESS phase noise profile	
AC fundamental.....	-50	dBc max
Sum of all spurs.....	-47	dBc max
Input VSWR (operating).....	1.3:1	max
Output VSWR (non-operating).....	1.3:1	max
Load VSWR, no damage.....	2.0:1	max

ELECTRICAL

Prime power.....	single phase
Voltage.....	180 to 265 V
Frequency.....	47 to 63 Hz
Power requirement.....	2600 VA max
Power factor.....	0.95 min

MECHANICAL

Weight.....	34Kg (75lb) typ
Dimensions.....	see outline
Cooling.....	integral forced-air

CONNECTORS

RF input.....	N-type female
RF output.....	PBR140 with 6-32 UNC 2B threaded holes
RF Sample port.....	N-type female
Prime Power.....	C20 Male IEC

Note: Mating connector for the mains supply is included.

ENVIRONMENTAL


For operation outside these parameters, refer to SpacePath Communications for guidance.	
Operating temperature (see note 1).....	-40 to +55 °C
Derating.....	2 °C/300 m above sea level (3.6 °F/1000ft)
Storage temperature.....	-40 to +80 °C
Relative humidity (condensing).....	100 %
Altitude:	
Operating.....	4.5 Km (15,000 ft) max
Non-operating.....	12 Km (40,000 ft) max
Vibration.....	BS EN 600668-2-64 test Fh, transportation
Shock.....	IEC Publication 68-2-27 Part 2 test Ea, 25g
EMC:	
EN61000-6-3:2001 (Emissions)	
EN61000-6-2:2001 (Immunity)	
FCC CFR47 Part 15B	
Acoustic Noise.....	68 dBA typ
Heat Dissipation.....	1500W to duct 350W to room

CONTROLS

Type	Function
REMOTE CONTROL	Off Standby Transmit RF inhibit Off Warm-up Standby Transmit Fault Summary Reflected Power External interlock TWT too hot Mean Helix Current Peak Helix Current High Power Alarm Low Power Alarm
REMOTE STATUS/MONITOR	High Power Alarm Set Low Power Alarm Set Auto Redundancy Control RF Switch Control Gain Control (when fitted) Output Power Monitor Reflected Power Monitor Helix Current Monitor Helix Voltage Collector Voltages Heater Voltage Heater Current Elapsed Hours
INTERFACES	RS-422/485 / Ethernet Dry Relay Contact
Other Features	Auxiliary Output Voltage Redundant system & waveguide switch drive

OPTIONS

Extensive options are offered with the STR2450 and include; integral pre-amplifiers, gain control, linearisers and block upconverters. The options are defined by adding to the base number as shown below:

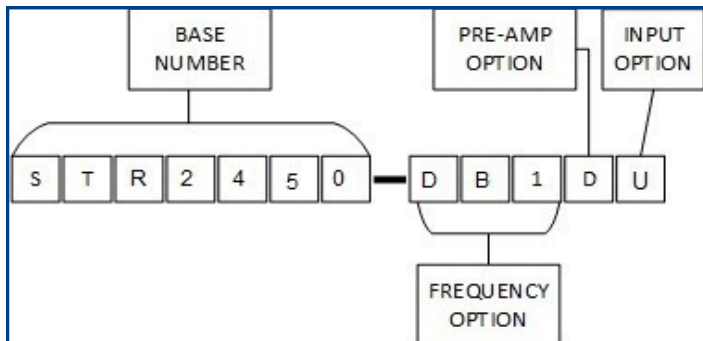

(Consult SpacePath Communications for availability of options)

Frequency Options

The STR2450 is offered in three frequency bands:

- DB1 - 17.3 - 18.1 GHz
- DB2 - 17.3 - 18.4 GHz

Pre-Amp Option

The pre-amp option can be selected from any of the following:

- A - Integral solid-state amplifier (typical SSG 78 dB)
- D - As option 'A' but includes an attenuator to provide 25 dB (min) of gain control
- Z - Integral lineariser that improves the linearity of the HPA, providing a C/I of typically -26 dBc at 4dB OPBO. The lineariser also incorporates the pre-amp and gain control options.
(Consult SpacePath Communications for availability)

Input Option

The STR2450 can be offered with an L-Band Block Upconverter.

Specify:

N - Standard RF

U - L to DBS-Band Block Upconverter (see page 4)

Note:

The upconverter requires the inclusion of the 'D' or 'Z' options. (Consult Spacepath Communications for availability)

For more information contact Spacepath Communications.

PERFORMANCE WITH INTEGRAL BLOCK UPCONVERTER

Output frequency range:		Group Delay:	
Option DB1.....	17.3 to 18.1	GHz Linear.....	0.01 ns/MHz
Option DB2.....	17.3 to 18.4	GHz Parabolic.....	0.005 ns/MHz ²
L-Band input:		MHz Ripple.....	0.5 ns/p-p
Frequency range option DB2.....	950 to 1750	Phase noise:	
Level.....	10 dBm	max Continuous.....	meets IESS phase noise profile
LO frequency.....	16.35	GHz AC Fundamental.....	-50 dBc
External reference (see note):		Sum of all spurs.....	-47 dBc
Frequency.....	10	Mhz Input VSWR (non-operating).....	1.6:1 max
Level.....	-3 to +7	dBm Output VSWR (non-operating).....	1.3:1 max
Impedance.....	50	Ω Load VSWR, no damage.....	2.0:1 max
Output power:		W min	
TWT output flange.....	500	W min	Note: The BUC can be operated without the external reference, typical frequency stability ±0.25 ppm.
HPA rated output.....	420		
Gain:		dB min	
At rated power (D, Z option).....	70	dB min	HEALTH AND SAFETY HAZARDS
SSG Prated -10dB (D, Z option).....	75	dB min	Stellar satellite amplifiers are safe to handle and operate provided that the relevant precautions are observed.
Attenuation range (D, Z option).....	25	dB max	Spacepath Communications does not accept responsibility for damage or injury resulting from the use of electronic devices it produces.
Gain Variation:		dB/MHz max	
Over any 500 MHz band.....	4.0		
Over any 40 MHz band.....	1.5		
Slope.....	0.08		
Gain Stability 24hrs constant drive, temperature and load.....	0.5		
Gain stability over full operating temperature...2.0			
Intermodulation (two equal carriers) with total output = P _{rated} -4dB:			
Options A,D.....	-18		
Performance with linearised option Z.....	-24		
Harmonic output.....	-60		
AM to PM conversion at P _{rated} -6dB.....	2.5		
Noise Power:			
Transmit band.....	-70	dBm	
Receive band (3.2-4.2GHz).....	-130	dB max	
Residual AM >100MHz from Carrier.....	-60	dBc max	
		°/dB	
		dBW/4 KHz max	
		dBW/4 KHz max	
		dBc max	

HEALTH AND SAFETY HAZARDS

Stellar satellite amplifiers are safe to handle and operate provided that the relevant precautions are observed. Spacepath Communications does not accept responsibility for damage or injury resulting from the use of electronic devices it produces.

High Voltage


Dangerous voltages are present within the TWT amplifier when operating normally. However, the equipment is designed so that personnel cannot come into contact with high voltage circuits unless covers are removed.

RF Radiation

All RF connectors must be correctly fitted before operation.

Beryllia

The TWT in the amplifier contains Beryllium Oxide ceramic parts. These are not accessible unless the TWT casing is damaged. Consult Spacepath Communications regarding the disposal of damaged or life expired tubes.

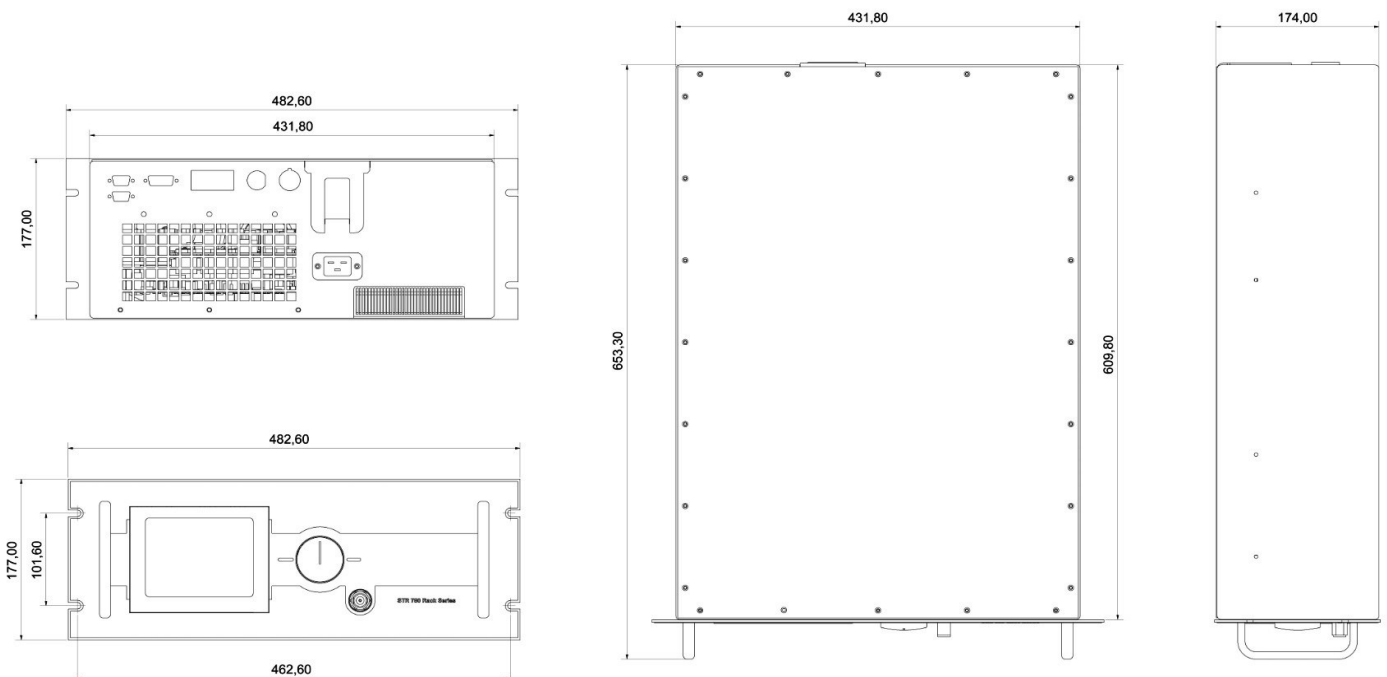

Whilst SpacePath Communications has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. SpacePath Communications accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.