

HL941x Series Pulse Inverters (150 kHz to 100 GHz)

Features and Technical Specifications¹ (HL9419 shown)

PRODUCT SUMMARY

The HL9417 and HL9419 are ultra-broadband Pulse Inverters with a typical fixed insertion loss of 2 dB with a very flat frequency response over the specified bandwidth.

These devices are used to invert a signal in the time domain, corresponding to a 180° shift in the frequency domain. The inverters are bi-directional with regards to the applied signal.

The cross-connection of the coaxial center conductor and outer ground along with ferrites and microwave absorber are used to accomplish the inversion.

Typical Applications:

- Test & Measurement
- High-speed data systems
- Pulse experiments
- RADAR

MODELS & OPTIONS

The following models are available:

- HL9417**, 67 GHz
- HL9419**, 100 GHz

The following options are available:

- JJ**, jack RF 1 and RF 2
- JP**, jack RF 1, plug RF 2
- PP**, plug RF 1 and RF 2


Other connector series are available upon request (e.g., 2.92mm).

| | |
|---------------------------------|--|
| Bandwidth | 150 kHz to 100 GHz |
| Insertion Loss | 2 dB, 150 kHz < f ≤ 100 GHz See Fig. 1 |
| Return Loss | 10 dB, 150 kHz < f ≤ 100 GHz See Fig. 2 |
| Input Power | 1 W (30 dBm) |
| Group Delay | 255 ps See Fig. 3 |
| Rise Time (10-90%) | 3 ps |
| Connectors (PORT 1 / PORT 2) | 1.0 mm, jack/jack (opt. -JJ) 1.0 mm, jack/plug (opt. -JP) 1.0 mm, plug/plug (opt. -PP) |
| Temperature Limits | -40° to +50° C, case |
| RoHS Compliant | Yes, assembled with lead-free solder |
| REACH Compliant | Yes |
| Warranty | 1 year, see website |


1 - Unless otherwise noted, the specifications in this table are typical for Model Number HL9419. See page 2 for full specifications for each model.



HL9419, Option -U-JP shown

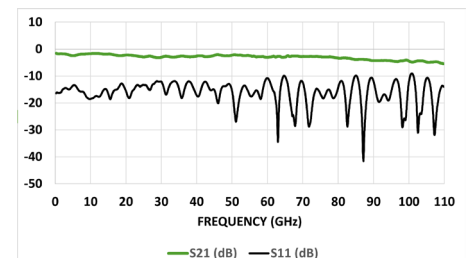

Typical HL9419 Insertion and Return Loss



HL9419 Schematic and Port Assignments

HL9417 and HL9419 Full Specifications

| Parameter | HL9417 | HL9419 | Comments |
|------------------------------|--|------------------------------|---|
| Upper Frequency Limit | > 67 GHz | > 100 GHz | |
| Lower Frequency Limit | 150 kHz | | |
| Input Power | 1 W (30 dBm) | | |
| Insertion Loss See Fig. 1 | 2 dB; 150 kHz < f ≤ 70 GHz | 2 dB; 150 kHz < f ≤ 100 GHz | Typical |
| Return Loss See Fig. 2 | 10 dB, 150 kHz < f ≤ 70 GHz | 10 dB, 150 kHz < f ≤ 100 GHz | Typical |
| Rise Time | 5 ps | 3 ps | Typical |
| Group Delay See Fig. 3 | 265 ps | 255 ps | |
| Connectors | 1.85 mm | 1.0 mm | Other connector series are available upon request (eg. 2.92mm). |
| Impedance | 50 Ω | | Input and Output |
| Dimensions (W x D x H) | 2.39" x 0.8" x 0.4" 60.7 x 20.3 x 10.2 mm | | Package including connectors (1.0 mm option) |
| Weight | 25 g (0.88 oz.) | | |
| Operating Temperature | -40° to +50° C | | Case temperature |
| RoHS Compliant | Yes, assembled with lead-free solder | | |
| REACH Compliant | Yes | | |
| Warranty | 1 year, repair or replacement; see website for details | | |

HL9419 Plots

Figures 1 and 2 show the Insertion Loss and Return Loss of the HL9419 to 110 GHz.

Figure 3 shows the Group Delay of the HL9419 to 110 GHz.

Figures 4 and 5 show the Time Domain waveforms of a 12 ps pulse with corresponding inverted output pulse.

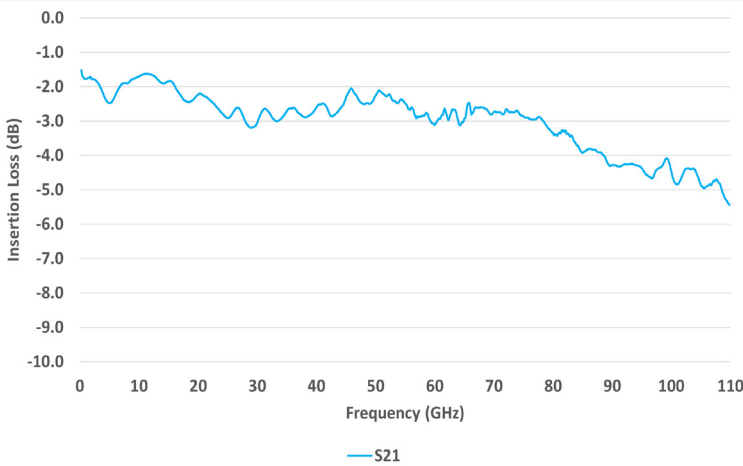


Figure 1: Typical HL9419 Insertion Loss

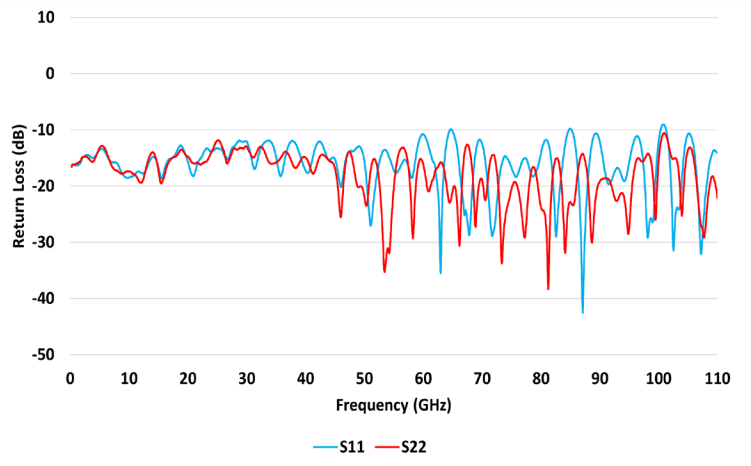


Figure 2: Typical HL9419 Return Loss

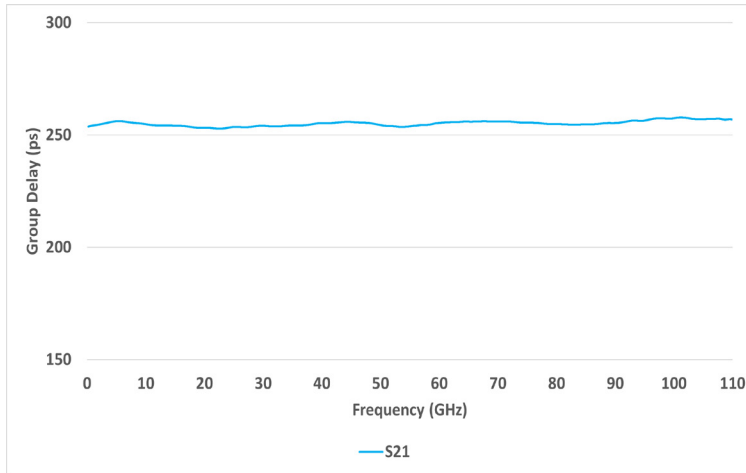


Figure 3: Typical HL9419 Group Delay

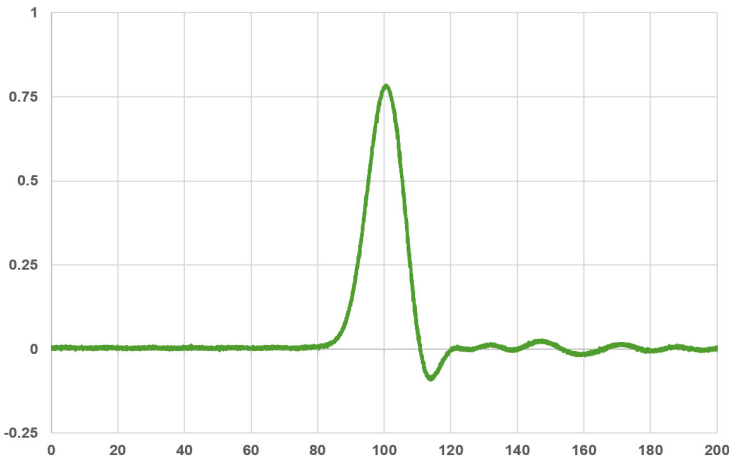


Figure 4: HL9417 12.4 ps Input Pulse

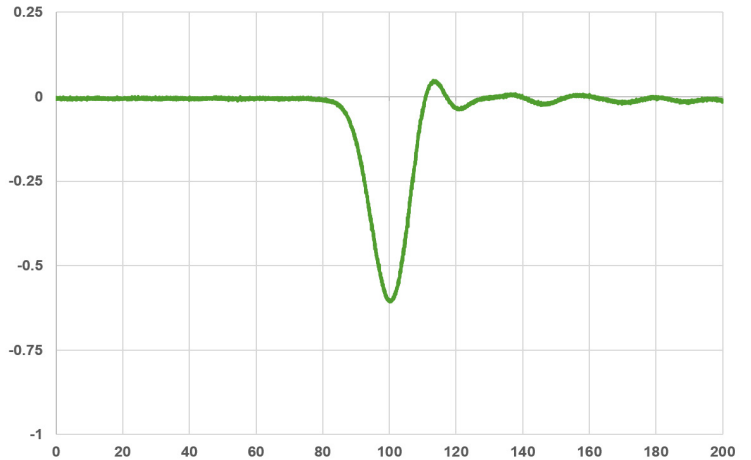


Figure 5: HL9417 12.8 ps Inverted Output Pulse

HL9419 Dimensional Drawing

Figure 6 shows a mechanical drawing of an HL9419-JP. Unless otherwise noted, all units are in inches. See page 2 for full dimensions.

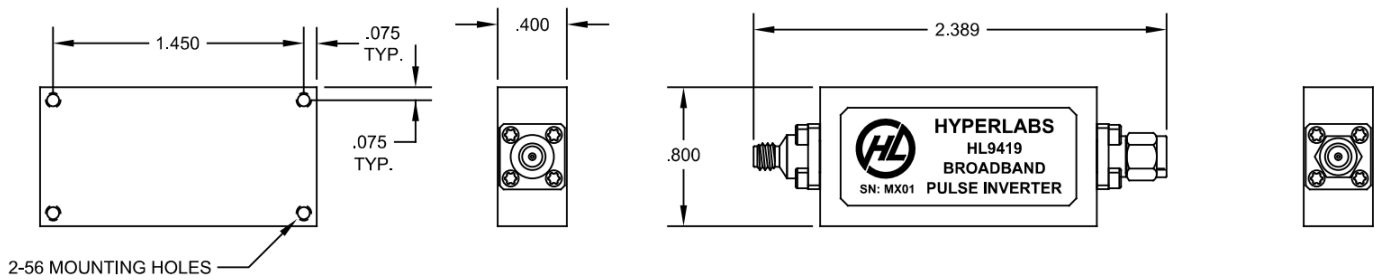


Fig 6: HL9419 Mechanical Drawing