


FEATURES

LO/RF Frequency:	4000 – 7500 MHz
Input IP3:	+23 dBm
Noise Floor:	-173 dBm/Hz
Sideband Suppression:	-34 dBc
LO Leakage:	-25 dBm
LO Power:	+19 dBm

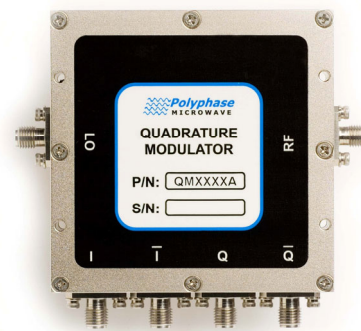


DESCRIPTION


The QM4075A is a quadrature (I/Q) modulator optimized for direct modulation of an RF carrier. Differential I and Q inputs are mixed with the local oscillator (LO) to produce a modulated RF output.

Internally matched lowpass filters provide anti-alias functionality for removing Nyquist images and wideband noise when interfacing to high-speed D/A converters.

For more information on interfacing the QM4075A to high-speed D/A converters and single-ended sources, please see Application Note 101A, "Driving the QM Series Quadrature Modulators."

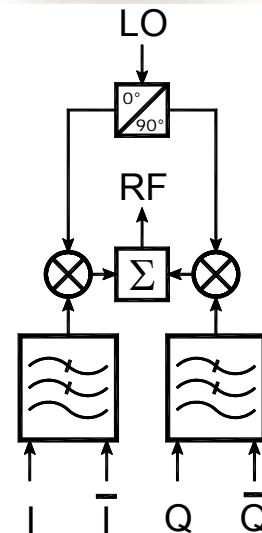

TYPICAL APPLICATION: DIRECT CONVERSION TRANSMITTER

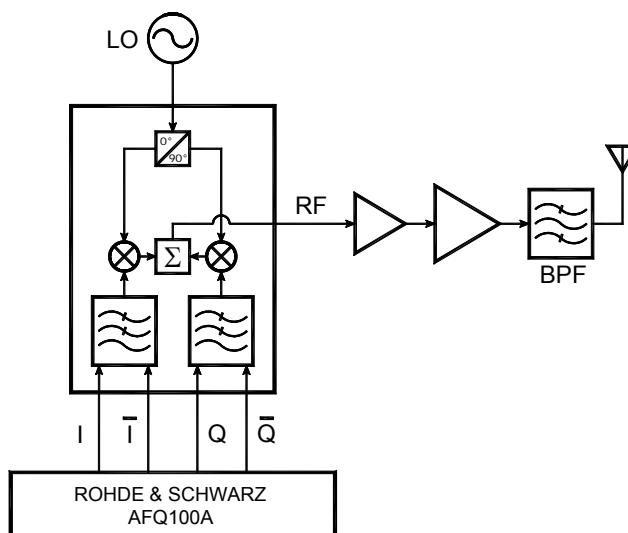

ELECTRICAL SPECIFICATIONS


Test Conditions: +25°C, LO = +19 dBm, I/Q inputs = 0 dBm total @ 100 kHz unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Frequency Range		4000		7500	MHz
LO Power		+18	+19	+21	dBm
LO VSWR			1.6:1		Ratio
RF VSWR			2.0:1		Ratio
I/Q Baseband Filter Bandwidth ¹	<1 dB Flatness	DC		275	MHz
I/Q Baseband Filter Stop Band ¹	>25 dB Rejection	450		5000	MHz
I/Q Differential Input Impedance			100		Ω
Conversion Loss			6.5	8.5	dB
Input IP3	2-Tone, Δf = 1 MHz		+23		dBm
Input P1dB			+13		dBm
LO Leakage at RF Port	No RF input drive		-25	-14	dBm
LO-IF Isolation	No RF input drive		70		dB
Sideband Suppression ²			-34	-25	dBc
Amplitude Imbalance		-0.4	±0.1	+0.4	dB
Quadrature Phase Error		-5	±1	+3	Degree
Output Noise Floor			-173		dBm/Hz
Operating Temperature Range		-40		+85	°C
LO/RF Input Power w/o Damage				+25	dBm

Notes:

- Standard lowpass filters. Contact factory for other options.
- For upper sideband operation: $I = \cos(t)$, $\bar{I} = -\cos(t)$, $Q = \sin(t)$, $\bar{Q} = -\sin(t)$


CASE DRAWING

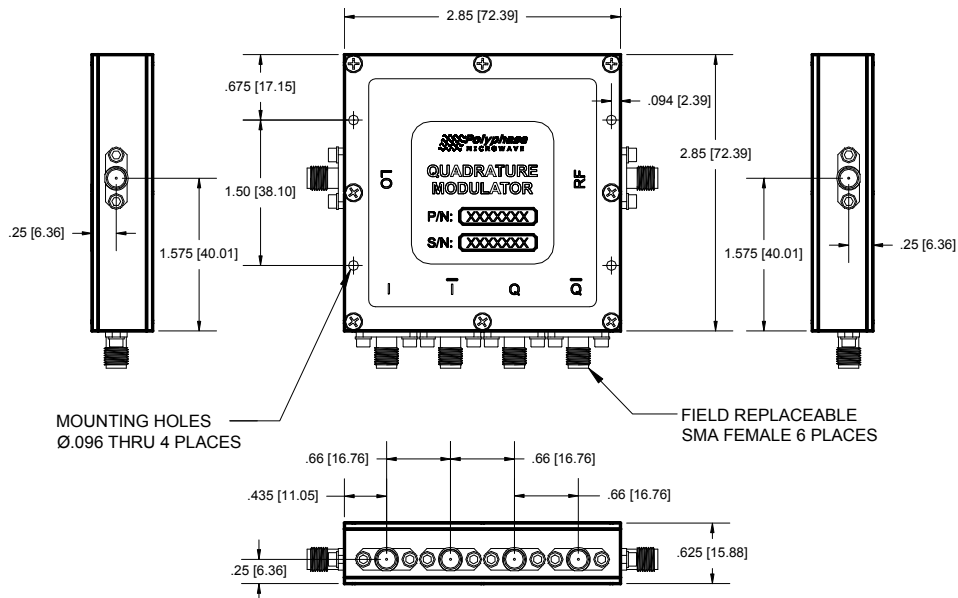


TYPICAL PERFORMANCE CHARACTERISTICS

Standard Test Conditions: +25°C, LO = +19 dBm, I/Q inputs = 0 dBm total @ 100 kHz.


Conversion Loss

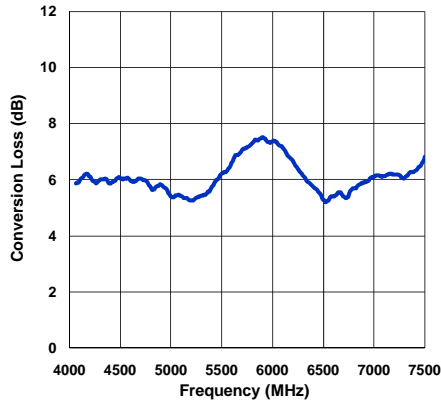


Input IP3

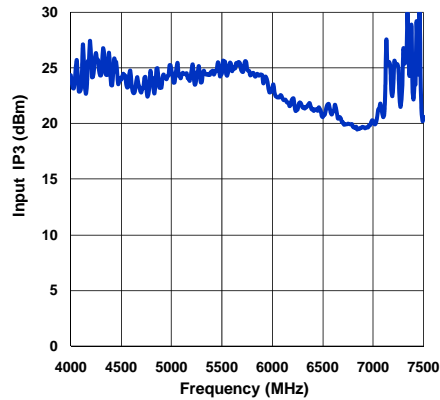


LO Leakage at RF Port

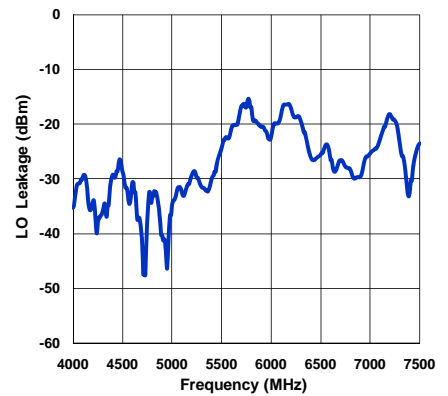

Amplitude Imbalance

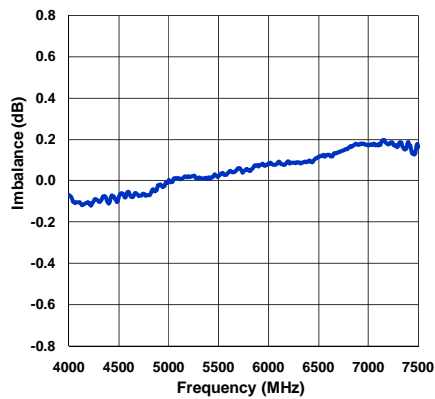

Quadrature Phase Error

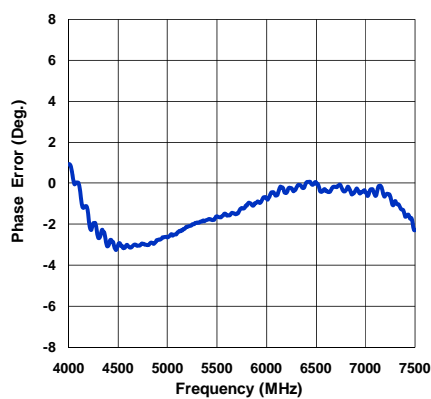

Sideband Suppression

