



High Dynamic Range Electrical Attenuator, 18 to 40 GHz

Description:

Model SKA-1834033537-KFKF-A1-M is MMIC based electrical attenuator. The attenuator exhibits 3.5 dB typical insertion loss and 0 to 37 dB nominal attenuation range across the frequency range of 18 to 40 GHz while applying 0 to -3 V_{DC} control voltage. While the control voltage of the standard model is 0 to -3 V_{DC}, the maximum damage control voltage is -5 V_{DC}. The RF input and output ports are K(F) connectors, and the control port is with SMA(F) connector.



Features:

- Broadband Operation
- High Dynamic Range
- Compact Package Size

Applications:

- Radar Systems
- Communication Systems
- Testing Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18 GHz		40 GHz
Insertion Loss		3.5 dB	
Attenuation Range		37 dB	
Input P _{1dB}		+10 dBm	
Damage RF Power Level			+30 dBm
Control Voltage		0 to -3 V _{DC}	
Damage Control Voltage Level			-5 V _{DC}
Input Return Loss		8 dB	
Output Return Loss		9 dB	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
RF Ports	K(F)
Bias Port	SMA(F)
Case Material	Aluminum
Connector Material	Passivate Stainless Steel
Finish	Gold Plated
Weight	0.68 Oz
Size	0.80" (W) x 0.80" (L) x 0.39" (H)
Outline	UH-235-3C






High Dynamic Range Electrical Attenuator, 18 to 40 GHz

Typical Attenuation vs. Frequency

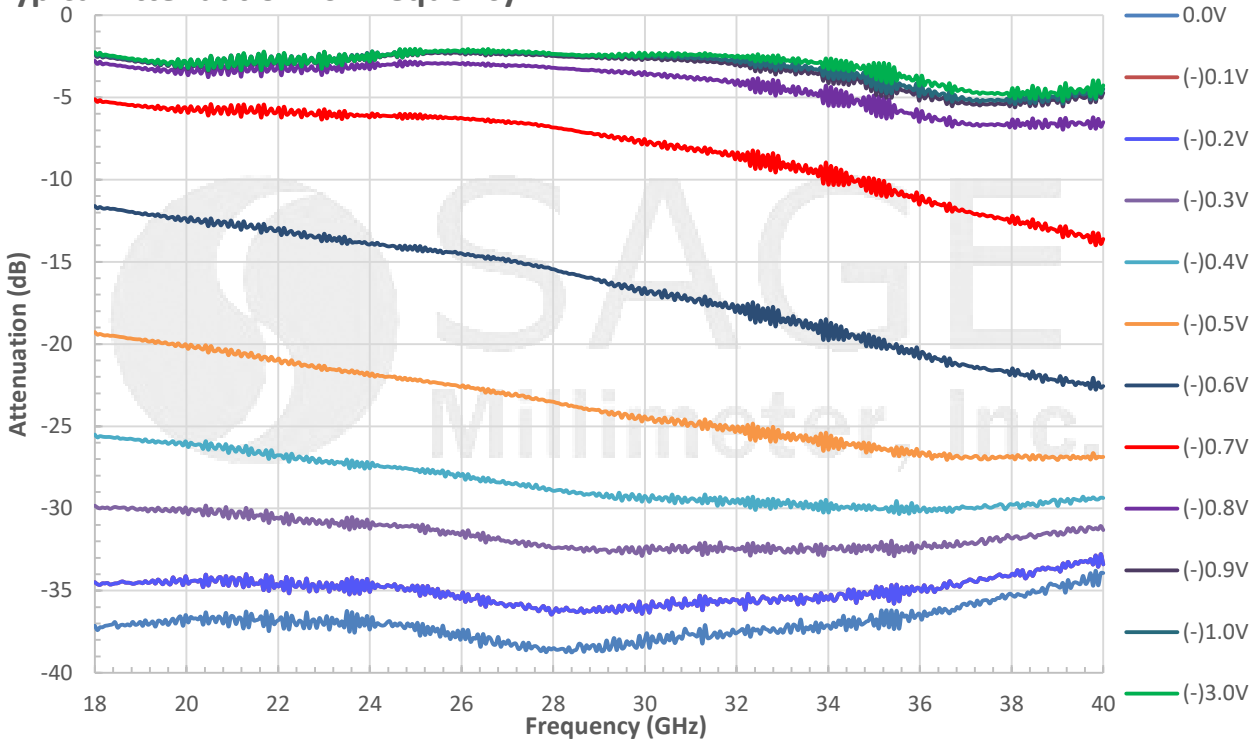


Typical Input Return Loss vs. Frequency

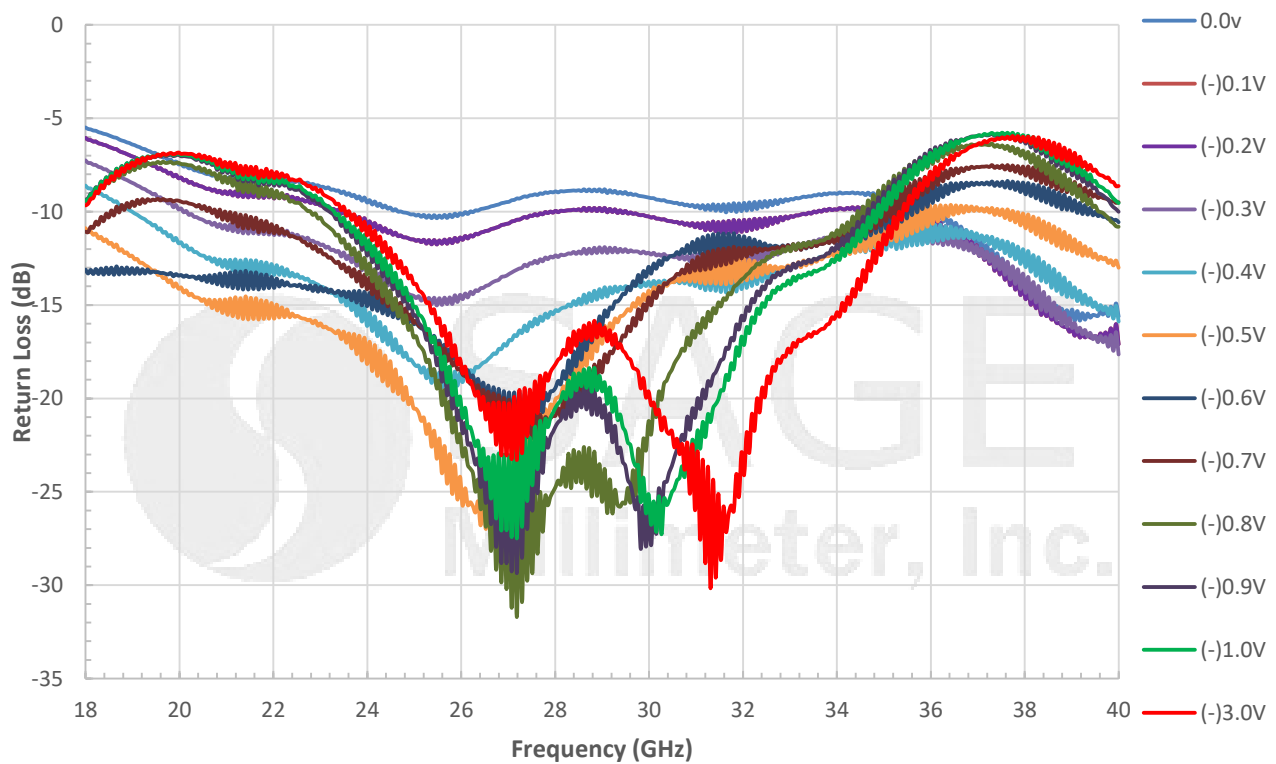




High Dynamic Range Electrical Attenuator, 18 to 40 GHz

Typical Output Return Loss vs. Frequency

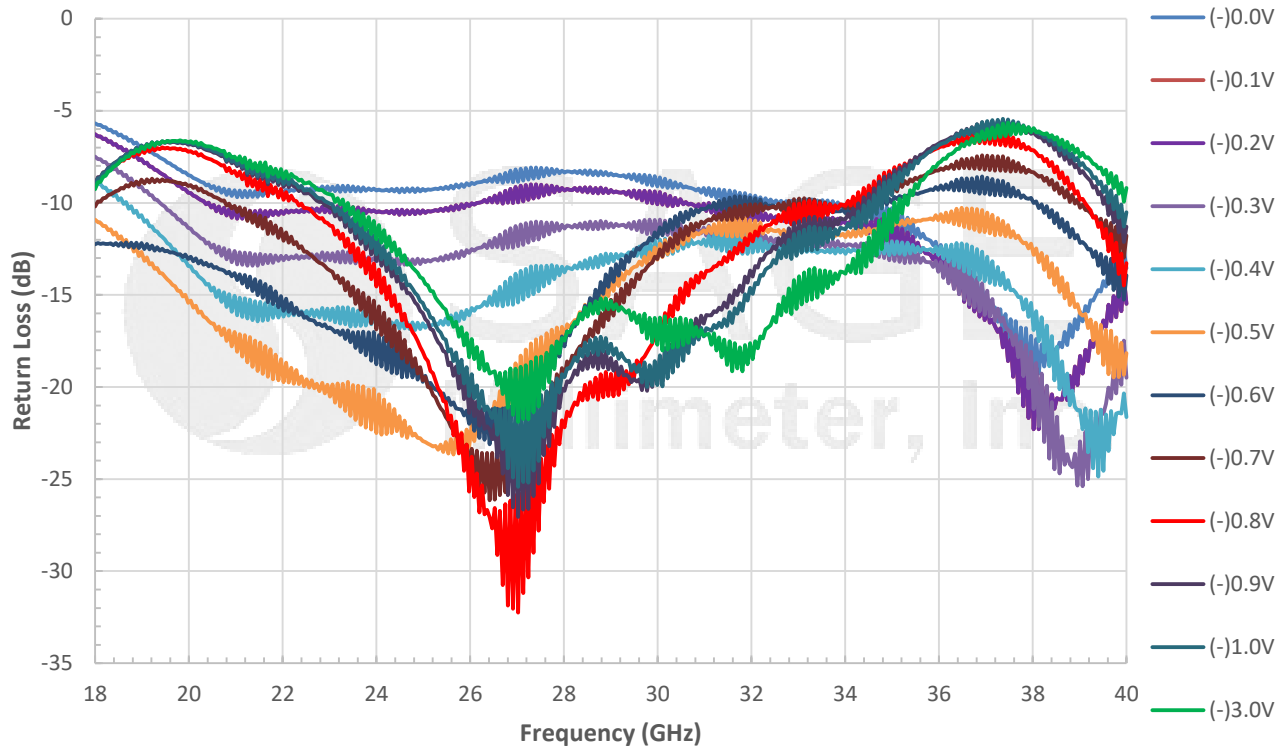

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

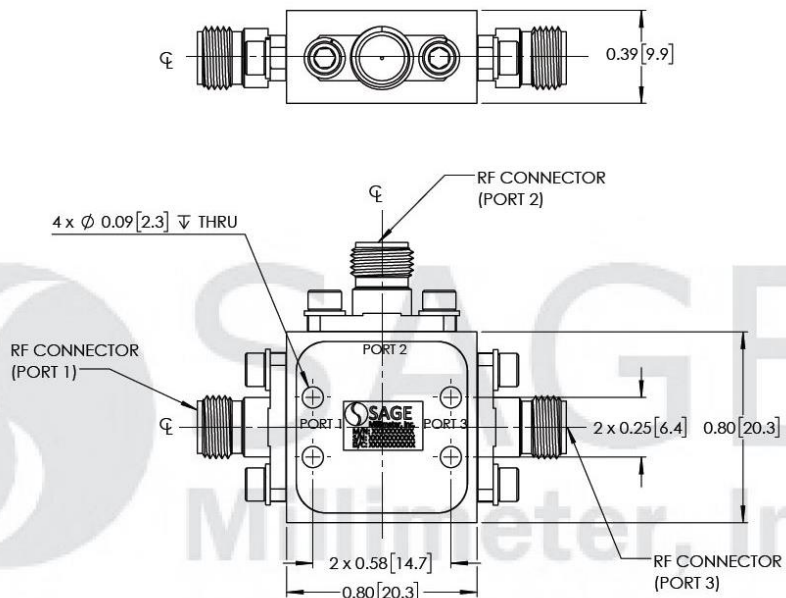

NOTE:
COAX CAN BE MALE OR FEMALE





High Dynamic Range Electrical Attenuator, 18 to 40 GHz

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The attenuator is a static sensitive device. Always follow ESD rules when working with the attenuator.
- Any foreign objects in the attenuator will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

