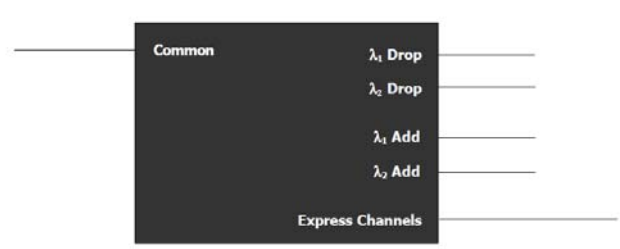


CWDM OADM Module (OADM)

Features	
Low insertion loss High channel isolation High stability and reliability	
Application	
CWDM system Metro/Access Networks CATV Fiberoptic System	

Specifications

Parameter		Type	1ch	2ch
Channel Wavelength (nm)			1471, 1491,..1551, 1571, 1591, 1611	
Channel space (nm)			20	
Channel bandwidth (nm)			$\lambda_c \pm 6.5$	
Add/Drop Channel Ripple (dB)			≤ 0.4	
Insertion loss (dB)	Add/Drop Ch.		≤ 0.7	≤ 1.0
	Express Ch.		≤ 0.6	≤ 1.2
Isolation (dB)	Drop	Adjacent Ch	≥ 30	
		Non-adjacent Ch	≥ 40	
	Add	Adjacent Ch	NA	
		Non-adjacent Ch	NA	
Express Channel Isolation (dB)			≥ 25	
Directivity (dB)			≥ 55	
Return loss (dB)			≥ 50	
PDL (dB)			≤ 0.15	
Wavelength thermal stability (nm/°C)			≤ 0.003	
Insertion loss thermal stability (dB/°C)			≤ 0.005	
Power handling (mW)			≤ 500	
Operating temperature (°C)			0 ~ +70	
Storage temperature (°C)			-40 ~ +85	
Dimensions (mm)			80x60x10 or 100x80x10	

Ordering Information:

OADM	Type	Port Type	Wavelength	Pigtail Type	Fiber Type	Length	Connector
	C=CWDM	1=1ch 2=2ch	1471=1471 1491=1291 1611=1611	900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	1=SMF-28e	1= 1m X=Specif y	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC XX=Other