

Single Mode 1*3/3*3 Single Window Wideband Coupler



Features


- Low insertion loss
- Comply with RoHS
- Comply with Telcordia GR-1209, GR-1221

Applications

- Telecommunications
- FTTH, CATV, LAN

1*3/3*3 SWBC SPECIFICATIONS (based on 33/33/33)

PARAMETERS	SWBC	
Grade	P	
Port Configuration	1*3	3*3
Operating Wavelength (nm)	1310 or 1550±10	
Insertion Loss (Max.)	≤5.8dB	≤6.2dB
Uniformity (Typical)	≤1.0dB	≤1.2dB
Thermal Stability (-40~85°C)	±0.1dB	
Return Loss	≥50dB	
Polarization Dependent Loss	≤0.2dB	
Packaging Type	1~C	
Operating Temperature	-40~85°C	

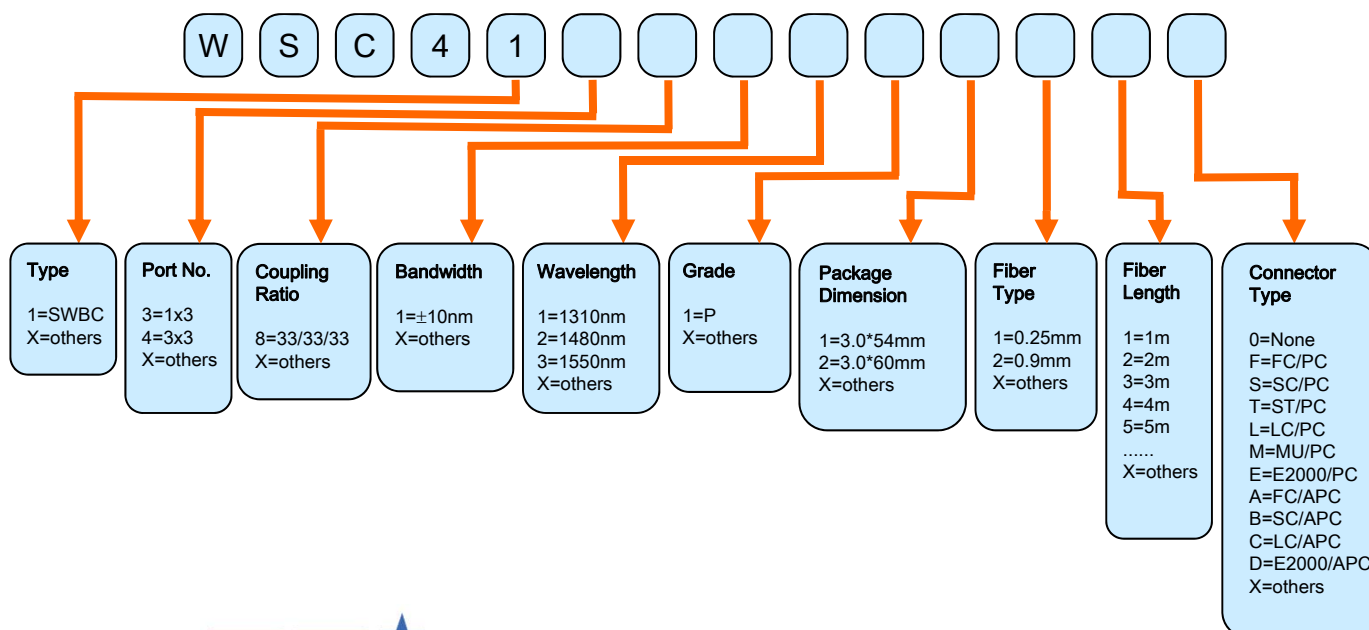

WANSHING OPTICAL CO., LTD
 3F No.53, Sec 2, Jhonghua Rd., Sinjhuang City,
 Taipei County 24246, TAIWAN, R.O.C.
 HOMEPAGE: <http://www.wanshing.com.tw> e-mail: info@wanshing.com.tw