

# Medium Size C+L Wideband In-Line Polarization Insensitive Circulator



## Features


- High Isolation
- Low Insertion
- Comply with RoHS

## Applications

- Telecommunications
- FTTH, CATV, LAN

## 3 Ports Circulator C+L Band SPECIFICATIONS

PARAMETERS	C+L Band P Grade
Operating Wavelength	1525~1610nm
Isolation (Typical)	≥35dB(40)
Insertion Loss (Typical)	≤1.0dB(0.7)
Return Loss (Typical)	≥50dB(55)
Crosstalk (Typical)	≥50dB(55)
PDL (Typical)/PMD	≤0.2dB(0.08)/≤0.1ps
Operating Temperature	-5~70 °C
Storage Temperature	-40~85°C
Max. Power	500mW
Packaging Dimension	5.5mm*55mm

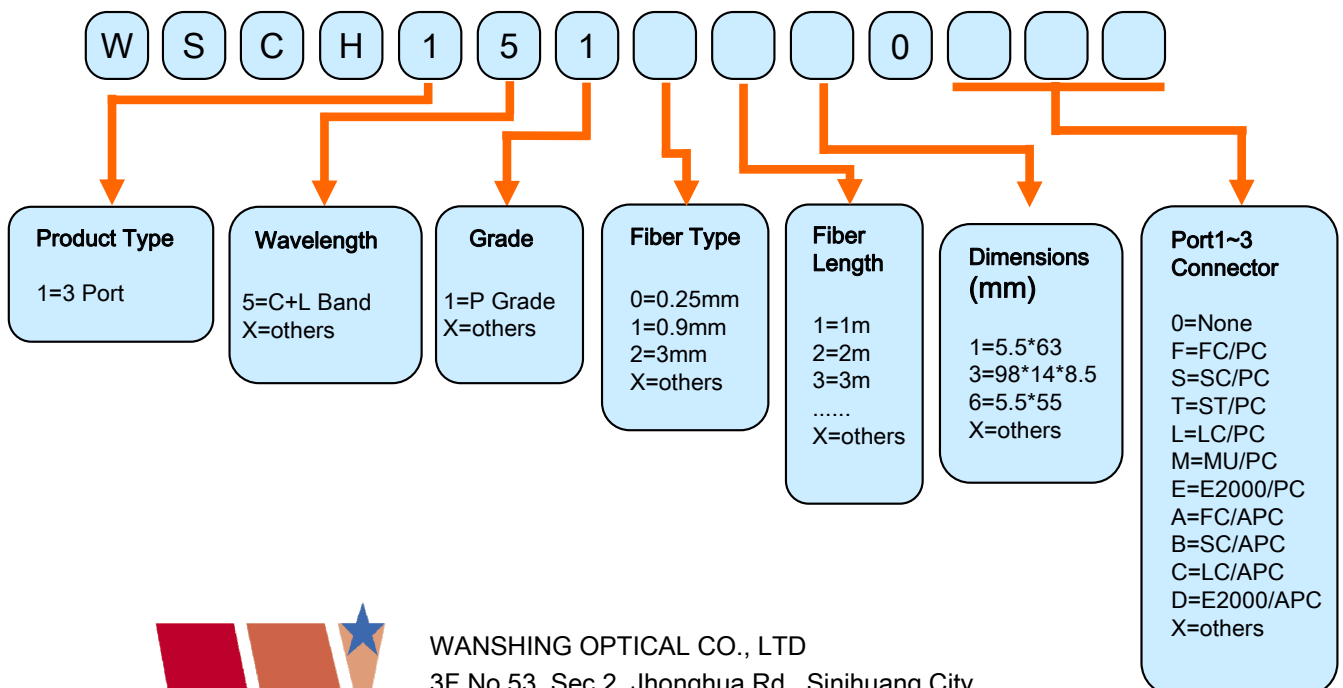

WANSHING OPTICAL CO., LTD

3F No.53, Sec 2, Jhonghua Rd., Sinjhuang City,  
Taipei County 24246, TAIWAN, R.O.C.

HOME PAGE: <http://www.wanshing.com.tw> e-mail: [info@wanshing.com.tw](mailto:info@wanshing.com.tw)