

Medium Size In-Line Polarization Insensitive 4 Ports Circulator



Features


- High Isolation
- Low Insertion
- Comply with RoHS

Applications

- Telecommunications
- FTTH, CATV, LAN

SPECIFICATIONS

PARAMETERS	P Grade	A Grade
Operating Wavelength	1310, 1550nm (1525~1610nm available)	
Bandwidth	±30nm	
Isolation (Typical)	≥35dB(50)	≥30dB(45)
Insertion Loss (Typical)	≤1.3dB(0.8)	≤1.6dB(1.1)
Return Loss (Typical)	≥50dB(55)	≥50dB(55)
Crosstalk (Typical)	≥50dB(55)	≥50dB(55)
PDL (Typical)/PMD	≤0.2dB(<0.1)/0.1ps	≤0.2dB(<0.15)/0.1ps
Operating Temperature	-5~70 °C	
Storage Temperature	-40~85°C	
Max. Power	300mW	
Dimensions	5.5mm*68mm	

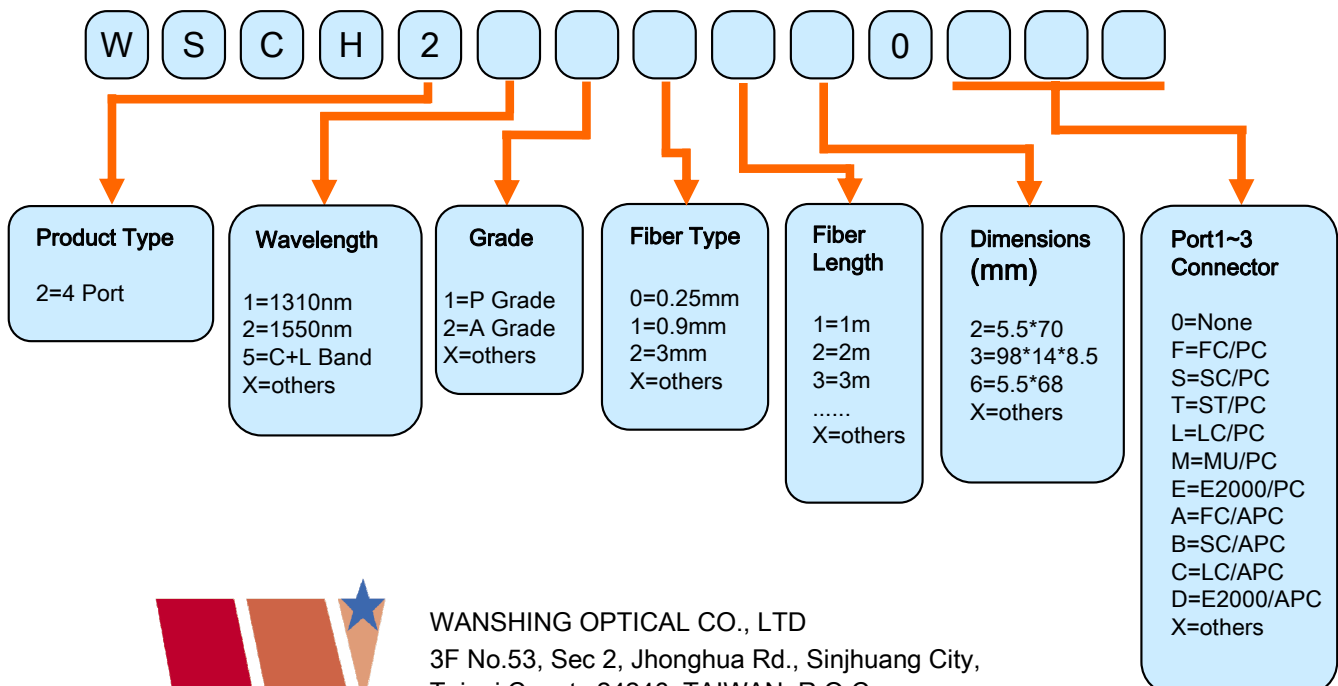

WANSHING OPTICAL CO., LTD

3F No.53, Sec 2, Jhonghua Rd., Sinhuang City,
Taipei County 24246, TAIWAN, R.O.C.

HOME PAGE: <http://www.wanshing.com.tw> e-mail: info@wanshing.com.tw