

ModBox

ModBox-VNA-780nm-40GHz

780 nm, 40 GHz Modulation Unit

The ModBox-VNA-780nm-40GHz is a wide bandwidth Optical Transmitter designed to extend Vectorial Network Analyzers applications into the optical domain.

When associated with a Vectorial Network Analyzer, they make up a high performance and easy to use test equipment for photoreceivers or any high speed optoelectronic device characterization.

The ModBox-VNA-780nm-40GHz incorporates a 780 nm low noise laser source and a modulation stage based on a wide bandwidth LiNbO₃ analog modulator with an automatic bias control circuit.



FEATURES

- Analog modulation up to 40 GHz
- Low RIN
- High harmonics suppression

APPLICATIONS

- Transmission system test
- Components characterization
- Receiver frequency test
- R&D laboratories


PERFORMANCE HIGHLIGHTS

Parameter

| | |
|------------------------|-----------------|
| Operating wavelength | 780 nm |
| Modulation formats | VNA, NRZ, PAM-4 |
| Frequency | Up to 40 GHz |
| Modulated output power | Typical 0 dBm |

ModBox-VNA-780nm-40GHz

FUNCTIONAL BLOCK DIAGRAM

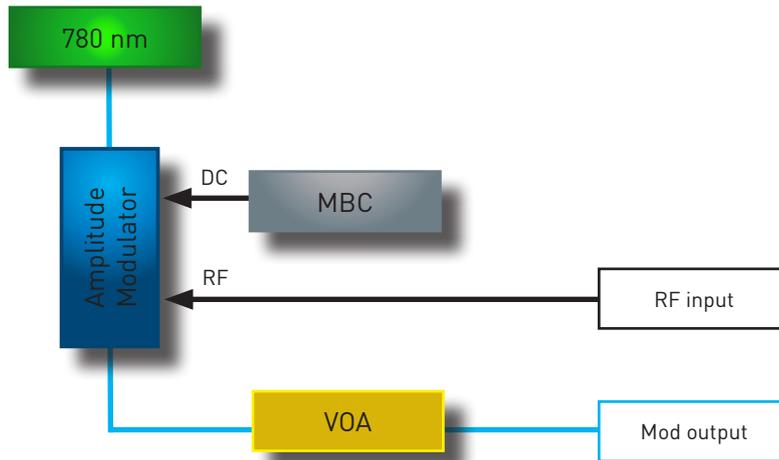

The ModBox-VNA-780nm-40GHz features:

- A chirp-free X-cut LiNbO₃ (Lithium Niobate) Mach-Zehnder modulator for very high linearity and very wide electro-optical bandwidth.
- A modulator bias controller. The internal LiNbO₃ modulator is a X-cut device with very low drift. However an automatic bias control circuit is provided to lock the operating point of the modulator at the quadrature point whatever the environmental conditions. It is pre-set for operation in quadrature, in the linear portion of the modulator transfer curve.
- A 780 nm low RIN laser. Wavelength and power are tunable through the front panel controls or the ModBox software interface.
- A Variable Optical Attenuator (VOA) to precisely control the modulated optical output signal.

The ModBox-VNA-780nm-40GHz is controlled from the front panel thanks to the Graphical Interface (Windows OS). It comes also with a set of TCP commands for remote control through the Ethernet port.

ModBox-VNA-780nm-40GHz

INPUT ELECTRICAL SPECIFICATIONS

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|------------------------------|-------------|----------------------|-----|-----|--------------|----------|
| Input electrical termination | - | AC coupled | | | Single ended | |
| Signal type | - | - | | | Analog | |
| Input voltage ⁽¹⁾ | V_{IN} | Amplitude modulation | 0.4 | 0.6 | 1 | Vpp |
| Bandwidth | BW | - | - | - | 40 | GHz |
| Impedance matching | Z_{IN-RF} | - | - | 50 | - | Ω |

(1): The ModBox-VNA-780nm-40GHz does not feature an internal RF amplifier. The VNA characterization is usually performed in a "small signal mode", therefore a RF amplifier is not necessary. Omitting the amplifier allows to obtain a smoother and flatter transfer function.

OUTPUT OPTICAL SPECIFICATIONS

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|---------------------------------|-------------------|--------------------------------|-----|-----|------|------|
| Modulation frequency | - | - | - | - | 40 | GHz |
| Wavelength | λ | Embedded by default | - | 780 | - | nm |
| Wavelength laser tuning range | $\Delta\lambda$ | Diode chip temperature control | - | 0.8 | 1 | nm |
| Modulated output power | OP_{OUT} | - | - | 0 | - | dBm |
| Optical output power adjustment | ΔOP_{OUT} | By the use of VOA | -40 | - | 0 | dB |
| Optical output power stability | δOP_{OUT} | Over 8 hours | - | - | 0.25 | dB |
| Spectrum linewidth | $\delta\lambda$ | FWHM | - | - | 1 | MHz |
| Optical return loss | ORL | - | -40 | - | - | dB |
| Electrical return loss | ERL | - | - | -12 | -10 | dB |


ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Min | Max | Unit |
|----------------|-----------|-----|-----|------|
| RF input power | EP_{in} | - | 28 | dBm |

ModBox-VNA-780nm-40GHz

INTERFACES, DIMENSIONS AND COMPLIANCE

Interfaces

| | |
|-------------------------------|--|
| Optical connectors and fibers | FC/APC - Polarization maintaining fiber, Corning PM85-U25D |
| Electrical connector | V female (1.85 mm) |
| Control | Embedded interface (front panel touchscreen) + remote control (Ethernet) |
| Power supply | 100 V - 120 V / 220 V - 240 V automatic switch 50 Hz - 60 Hz (rear panel) |
| Dimensions / Weight | Rack 19" x 2U, depth = 495 mm / 5 kg |
| EMC and optical norms | EN61326-1 Ed. 2006 / NF EN 60625-1 |
| Laser safety | Class 3R  |



ORDERING INFORMATION

Modbox-VNA-780nm-40GHz

VNA = Optical Vectorial Network Analyser extension

780nm = operation at 780nm with embedded laser

40GHz = Analog Modulation up to 40 GHz

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com

Europe +33 1 30 08 87 43 | Americas +1 508 745 3487 | APAC +65 6747 4912

exail