

ModBox

ModBox-VNA-OBand-70GHz

O-Band, 70 GHz Modulation Unit

The ModBox-VNA-OBand-70GHz is a wide bandwidth Optical Transmitter designed to extend Vectorial Network Analyzers applications into the optical domain.

When associated with a Vectorial Network Analyzer, they make up a high performance and easy to use test equipment for photoreceivers or any high speed optoelectronic device characterization.

The ModBox-VNA-OBand-70GHz incorporates a low noise laser source at 1310 nm and a modulation stage based on a wide bandwidth LiNbO₃ analog modulator with an automatic bias control circuit. An optical input for external laser can be added to provide maximum flexibility for test & measurement.



FEATURES

- Analog modulation up to 70 GHz
- Low RIN
- High harmonics suppression

APPLICATIONS

- Transmission system test
- Components characterization
- Receiver frequency test
- R&D laboratories

OPTIONS

- Optical input for external laser


PERFORMANCE HIGHLIGHTS

Parameter

| | |
|------------------------|-------------------|
| Operating wavelength | 1310 nm |
| Embedded laser | DFB |
| Modulation formats | VNA, NRZ, PAM-4 |
| Frequency | Up to 70 GHz |
| Modulated output power | Superior to 2 dBm |

ModBox-VNA-OBand-70GHz

FUNCTIONAL BLOCK DIAGRAM

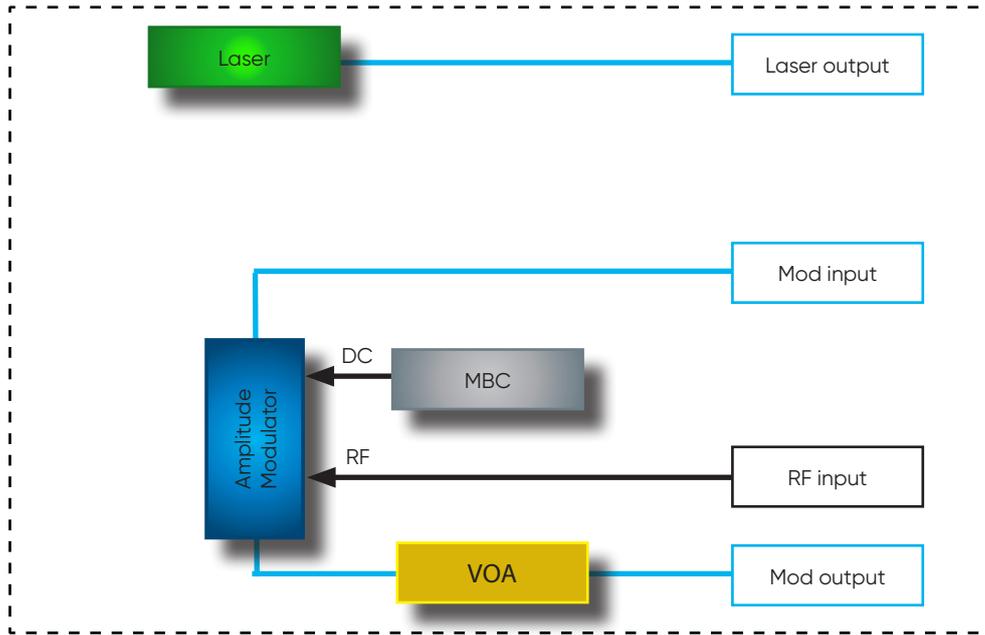

The ModBox-VNA-OBand-70GHz features:

- A chirp-free X-cut LiNbO₃ (Lithium Niobate) Mach-Zehnder modulator for very high linearity and very wide electro-optical bandwidth, it operates within the full O-Band.
- A modulator bias controller. The internal LiNbO₃ modulator is a X-cut device with very low drift. However, an automatic bias control circuit is provided to lock the operating point of the modulator at the quadrature point in the linear portion of the modulator transfer curve. The MBC ensures a stable operation over time and shows a very low noise sensitivity yielding a significant reduction of the required dither voltage amplitude.
- A low noise DFB laser emitting at 1310 nm, wavelength and power are tunable through the front panel controls or the ModBox software interface.
- A Variable Optical Attenuator (VOA) to precisely control the modulated optical output signal.

The ModBox-VNA-OBand-70GHz is controlled from the front panel thanks to the Graphical Interface (Windows OS).

It comes also with a set of TCP commands for remote control through the Ethernet port.

ModBox-VNA-OBand-70GHz

INPUT ELECTRICAL SPECIFICATIONS

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|------------------------------|-------------|------------|-----|-----|--------------|----------|
| Input electrical termination | - | AC coupled | | | Single ended | |
| Signal type | - | - | | | Analog | |
| Input voltage | V_{IN} | VNA mode | 0.4 | 0.6 | 1 | Vpp |
| Bandwidth | BW | - | - | - | 70 | GHz |
| Impedance matching | Z_{IN-RF} | - | - | 50 | | Ω |

INPUT OPTICAL SPECIFICATIONS (optional)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|--------------|-----------|-----------|------|------|-----------------------|------|
| Operation | λ | CW | 1260 | 1310 | 1360 | nm |
| Polarization | - | - | | | Linear and controlled | |
| Power | OP_{IN} | - | - | - | 13 | dBm |

OUTPUT OPTICAL SPECIFICATIONS

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|---------------------------------------|-------------------|--------------------------------|-----|------|------|-------|
| Modulation frequency | - | - | - | - | 70 | GHz |
| Wavelength | λ | With embedded laser | - | 1310 | - | nm |
| Wavelength laser tuning range | $\Delta\lambda$ | Diode chip temperature control | - | 0.8 | 1 | nm |
| Modulated output power | OP_{OUT} | With embedded laser | 2 | 2.5 | - | dBm |
| Optical output power adjustment | ΔOP_{OUT} | By the use of VOA | -40 | - | 0 | dB |
| Optical output power stability | δOP_{OUT} | Over 8 hours | - | - | 0.25 | dB |
| Spectrum linewidth | $\delta\lambda$ | FWHM | - | 3 | 15 | MHz |
| Relative intensity noise | RIN | - | - | - | -160 | dB/Hz |
| Optical return loss | ORL | - | -40 | -45 | - | dB |
| Electrical return loss (DC to 40 GHz) | ERL | - | - | -10 | - | dB |

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Min | Max | Unit |
|---------------------|-----------|-----|-----|------|
| RF input power | EP_{in} | - | 28 | dBm |
| Optical input power | OP_{IN} | - | 20 | dBm |

ModBox-VNA-OBand-70GHz

INTERFACES, DIMENSIONS AND COMPLIANCE

Interfaces

| | |
|-------------------------------|--|
| Optical connectors and fibers | FC/APC - Polarization maintaining fiber, Corning PM 13-U25D |
| Electrical connector | V female (1.85 mm) |
| Control | Embedded interface (front panel touchscreen) + remote control (Ethernet) |
| Power supply | 100 V - 120 V / 220 V - 240 V automatic switch 50 Hz - 60 Hz (rear panel) |
| Dimensions / Weight | Rack 19" x 2U, depth = 495 mm / 5 kg |
| EMC and optical norms | EN61326-1 Ed. 2006 / NF EN 60625-1 |
| Laser safety | Class 3R  |



ORDERING INFORMATION

Modbox-VNA-OBand-70GHz

VNA = Optical Vectorial Network Analyser extension

OBand = operation in the O-Band band with a DFB laser embedded by default

70GHz = Analog Modulation up to 70 GHz

Exail reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein.

contact.photonics@exail.com | www.exail.com

Europe +33 1 30 08 87 43 | Americas +1 508 745 3487 | APAC +65 6747 4912

exail