

MBL-SF-491/2~400mW

### LD PUMPED ALL-SOLID-STATE BLUE LASER

CNI's All solid state at 491nm blue laser features of ultra compact, long lifetime, low cost and easy operating, which is used in laser display, medical treatment, scientific research, etc.




#### SPECIFICATIONS

Wavelength (nm)	491 ± 1
Operating mode	CW
Output power (mW)	>2, 50, 100, ..., 400
Power stability (rms, over 4 hours)	<3%, <5%, <10%
Transverse mode	Near TEM <sub>00</sub>
Beam divergence, full angle (mrad)	<3
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	~4
Polarization ratio	>100:1
Beam height from base plate (mm)	96.4
Warm-up time (minutes)	<10
Operating temperature (°C)	10~35
Power supply (90-264VAC)	PSU-W-FDA
Expected lifetime (hours)	10000
Warranty period	1 year




MBL-SF-491

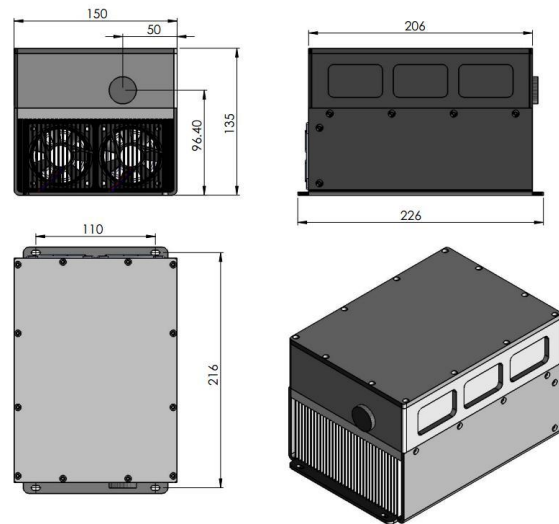

226(L)×155(W) ×135(H) mm<sup>3</sup>, 7.5kg

PSU-W-FDA

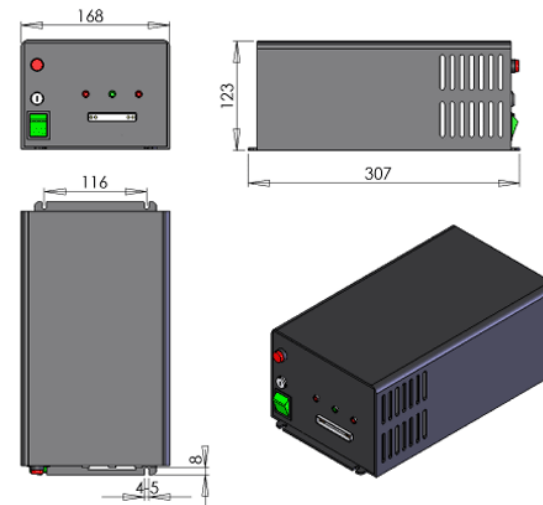

307 (L) ×168(W) ×123(H) mm<sup>3</sup>, 4.5kg