

PD-30e-M



DEVICE

30 GHz Photodiode Module

The Optilab PD-30e-M is a 30 GHz photodiode module that is optimized for 1064nm operational wavelength; it is designed for RF over Fiber, antenna remoting, and broadband RF transmission applications using single mode optical. The PD-30e-M can accept input power of up to 20 mW. The PD-30e-M utilizes a high input power, low distortion PIN photodiode that provides optical to RF conversion out to the frequency range beyond 20 GHz. This compact, cost-effective receiver module can provide users with status monitoring using an on-board processor that communicates to a host computer over an RS-232 I/O interface via a standard USB 2.0 port. When the PD-30e-M RF over fiber receiver module is linked with the LT series of RF over fiber transmitter modules, the combination provides an excellent solution for ultra-wideband RF to fiber conversion applications. Contact Optilab for more information.

OVERVIEW


FEATURES

- Optimized for 1064nm
- 60 kHz to 30 GHz, AC coupled
- DC to 30 GHz, DC coupled
- Highly linear to 20 mW+ input power
- No TIA for Intrinsic Phase Linearity
- Responsivity 0.7A/W @1060nm
- Flat frequency response, ± 1 dB

USE IN

- EW Systems
- Broadband Delay-line and Signal Processing
- LIDAR Receivers
- Phased and Interferometric Array Antenna
- Wideband RF Transmission over Fiber
- RF/IF Signal Distribution
- Satcom Microwave Antenna Signal Distribution

FUNCTIONAL DIAGRAM

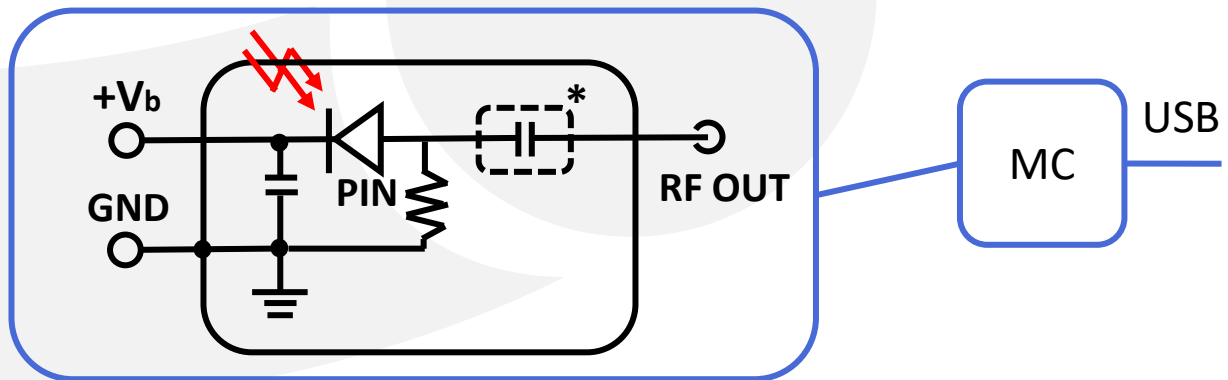



PD-30e-M

SPECIFICATIONS

Optimized Operating Wavelength	1064 nm optimized wavelength
Useful Operating Wavelength	1030 - 1570 nm range
Optical Input Level	20 mW max.
S21 3 dB Bandwidth	28 GHz min., 30 GHz typ.
S22 Characteristics	< -10 dB @ 20 GHz
Low Frequency Cut Off	60 KHz; DC for DC version
Responsivity	0.6 A/W @ 1060 nm
Dark Current @ 25°C, 5 V	10 nA typ., 100 nA max.
Optical Return Loss	-30 dB typ.
Optical PDL @ 1550	0.05 dB max.
Optical Fiber	SMF-28
Bias Voltage	5 V typ.
Impedance	50Ω
Coupling	AC-Coupled; DC Coupled is available

GENERAL

ANALOG APPLICATIONS

Ripple over any 1 GHz	± 1.0 dB max.
Group Delay	< 7.0 ps
2 nd Harmonics Distortion	-70.0 dBc max.
3 rd Harmonics Distortion	-75.0 dBc max.

LINK PERFORMANCE WITH LT-20

SFDR	113 dB Hz _{2/3}
Link Loss	-25 dB @ 10 dBm optical input

MECHANICAL


Operating Temperature (standard)	-10°C to +60°C
Storage Temperature	-55°C to +75°C
Operating Humidity	85%
Power Supply Requirements	+5 V DC, 500 mA max.
Optical Connector	FC/APC, SC/APC Optional
RF Connector	K Connector Female, 50Ω
Local Alarm	LED: Optional Input Power
Remote Alarm	RS-485 Interface (standard) via USB
Dimensions	82mm x 60mm x 26.5mm
Accessories Included	110 V - 240 V AC USB Adaptor & Cable
Housing	Precision Mach. Anodized Aluminum







PD-30e-M

S21 O/E RESPONSE

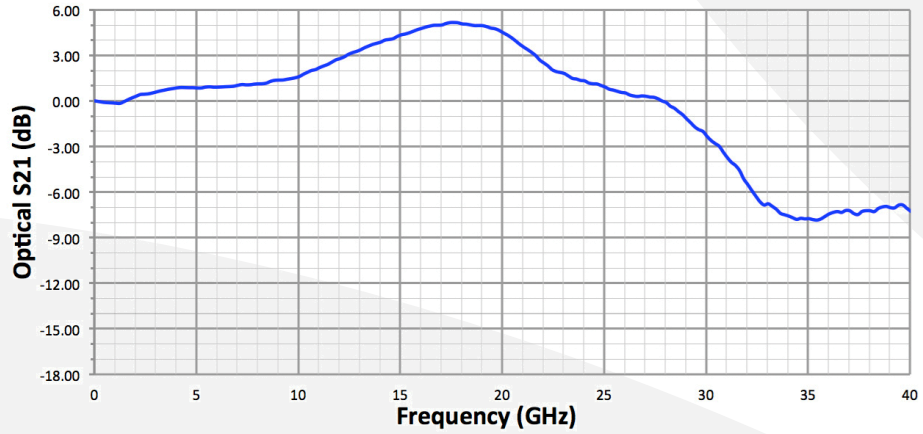



CSO, CTB LINEARITY MEASUREMENT

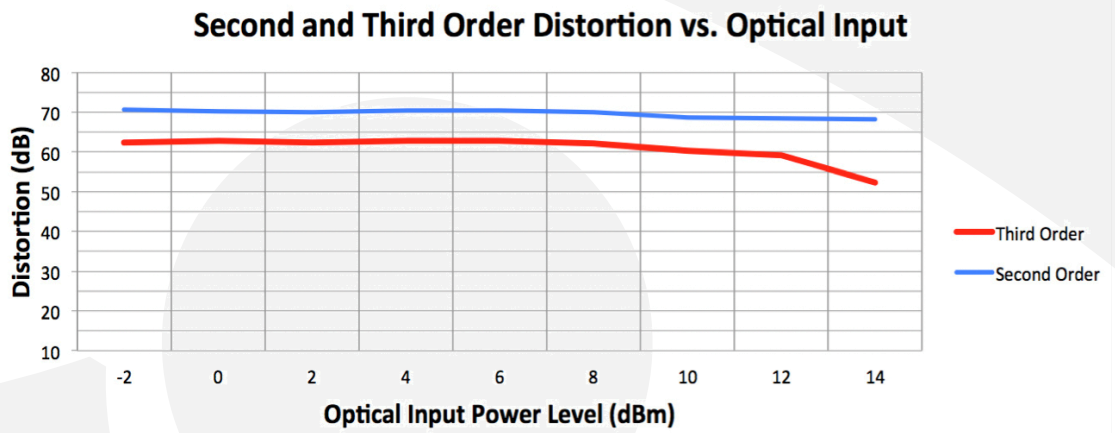



PD-30e-M

MECHANICAL DRAWINGS

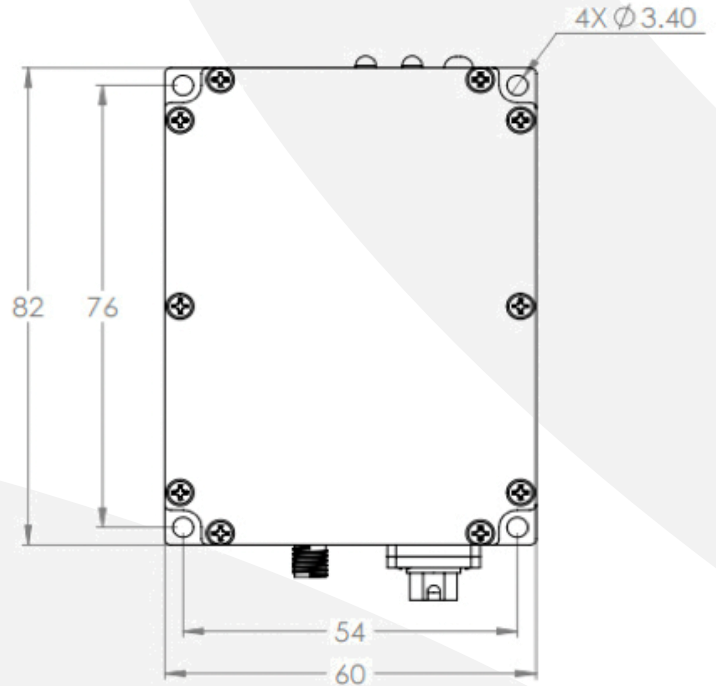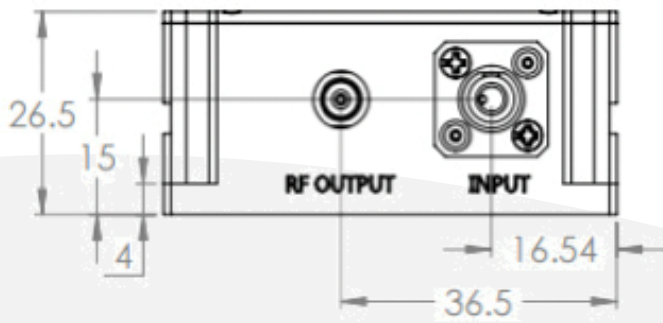

PD-30e-M MODULE POWER AND REMOTE INTERFACE

The PD-30e-M product series offers a turn-key modular solution with a USB 2.0 interface, which can be operated with the provided AC/DC adapter included with each PD-30e-M unit or through a PC for optical power monitoring. Contact Optilab for more information.

