


SPD-25-MM

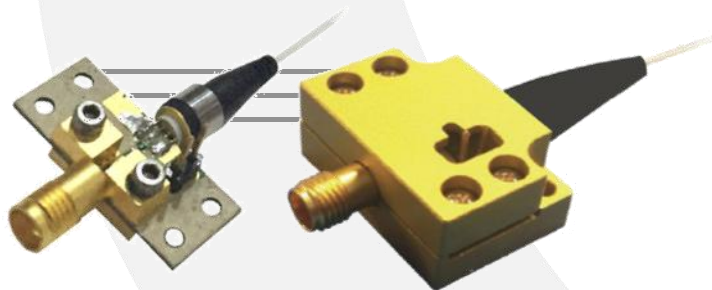

DEVICE

25 GHz Linear GaAs PIN Photodetector, 850 nm, Multimode Fiber

OVERVIEW

The Optilab SPD-25-MM is a highly linear, 25 GHz bandwidth GaAs PIN photodetector that is optimized for 850 nm operational wavelength w/Multimode Fiber (OM2); it is ideal for use in O/E front-ends requiring wide band frequency response. The coplanar waveguide photodiode design optimizes speed and sensitivity for the 850 nm and assures a 25 GHz frequency response necessary for digital and analog applications. The SPD-25-MM is available in a standard 2-pin package with K type RF connector output for ease of assembly and can be ordered with or without the external protective housing.



FEATURES


- Optimized for 850 nm
- 50 um Multimode Fiber (OM2)
- DC to 25 GHz, DC coupled
- Low Bias Voltage
- Responsivity 0.45 A/W @850 nm

USE IN

- 25 GHz Analog RF over Fiber
- 850 nm picosecond pulse detection
- Coherent lightwave systems
- Front-End O/E converter for test instrument

FUNCTION DIAGRAM

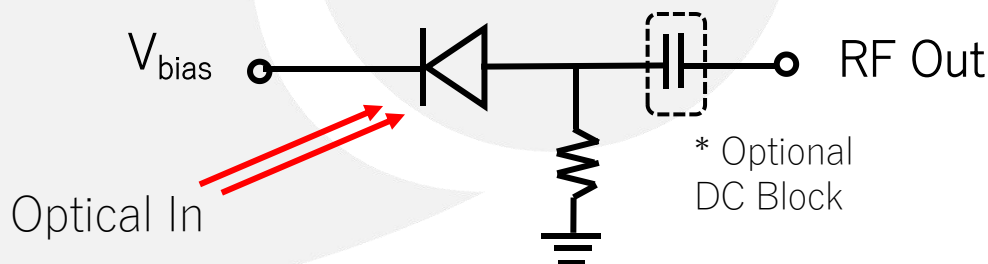



SPD-25-MM

SPECIFICATIONS

GENERAL

Optimized Operating Wavelength	830 nm to 870 nm
Optical Input Level	20 mW Peak max. or 10 mW Average
S21 3 dB Bandwidth	20 GHz min.; 25 GHz typ.
S22 Up to 10 GHz	≤ -10 dB
Responsivity @ 850 nm	0.37 A/W min.; 0.45 A/W typ.
Dark Current @ 25°C, +3 V Bias	0.1 nA typ., 10 nA max.
Reverse Bias Voltage	+3 V typ., +30 V max.
Impedance	50 Ω
Coupling	DC-Coupled



MECHANICAL

Operating Temperature	-10 °C to +60 °C
Storage Temperature	-55 °C to +75 °C
Operating Humidity	85%
RF Connector	K Female
Dimensions	See Drawing Below
Fiber Connector	FC/APC
Optical Fiber	MMF (OM2) 50 μ m

ABSOLUTE MAXIMUM RATINGS

PIN Bias Voltage	+30 V max.
Optical Peak Input Power	20 mW
Lead Soldering Temp. (10s)	250 °C


Typical S21 O/E RESPONSE

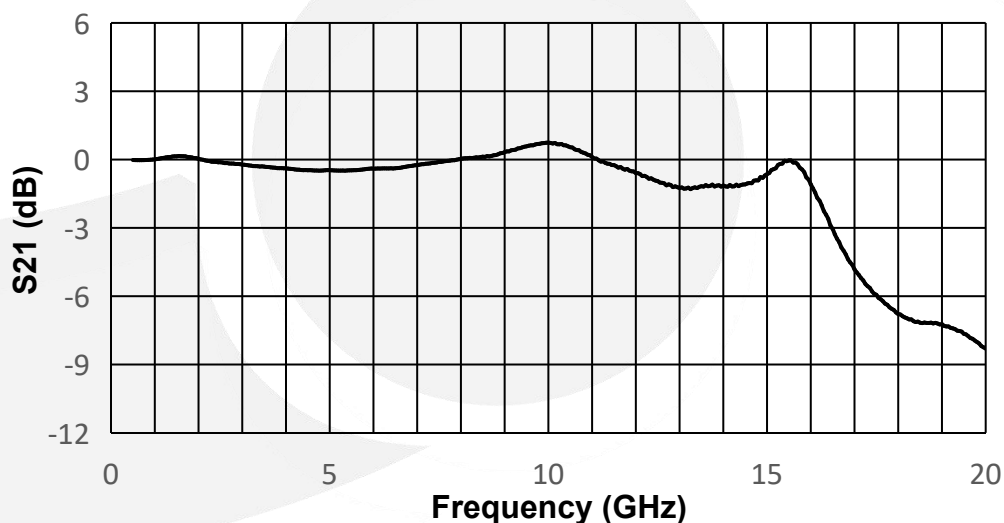




SPD-25-MM

SPD-25-MM-A Mechanical Drawing

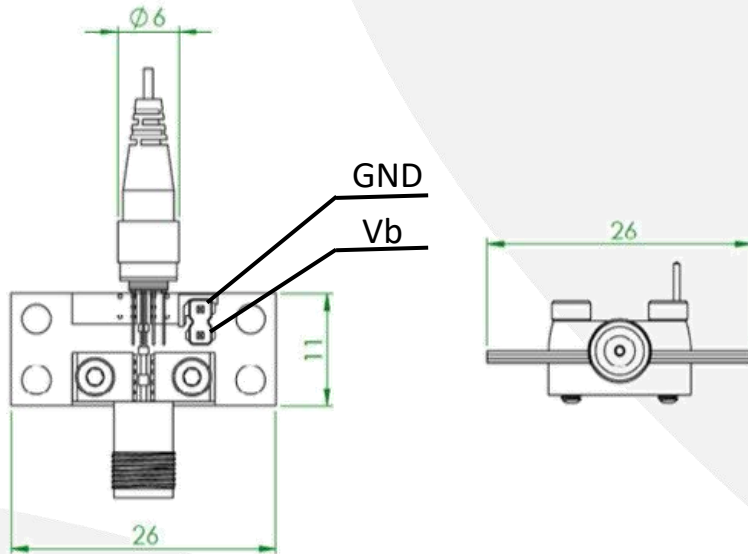

SPD-25-MM-C Mechanical Drawing

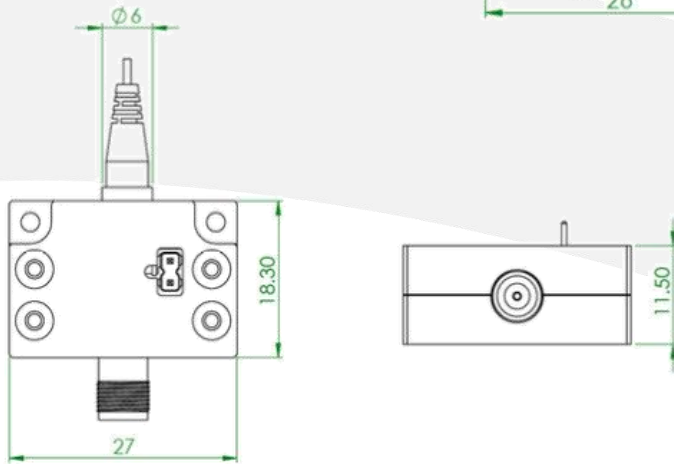

Mechanical Housing Material
- Aluminum Alloy


Unit: mm


SPD-XX-M: Module



Ready to use module

- Power and Remote Monitoring via USB Port





SPD-25-MM

Related Laser Source


- LD-850-60-CX



The Optilab LD-850-60-CX is an 850 nm laser diode, packaged in compact coaxial housing with single mode fiber pigtail.

Related Modulator

- IMP-850-20-PM



The Optilab IMP-850-20-PM Intensity Modulator is designed for external modulation of 850 nm laser up to 20 GHz.

ORDERING OPTIONS

SPD-25-MM-X

X : A - No Housing, default, C - External Housing

