
**Features**

- Single element PIN-Diode
- High QE in the visible spectrum
- Flip chip design for flat surface
- Chip size package
- Reflow solderable, MSL1

**Description**

Backside illuminated PIN photodiode optimized for CsI:Tl scintillator luminescence detection. BGA package with flat surface flip chip design.

**Application**

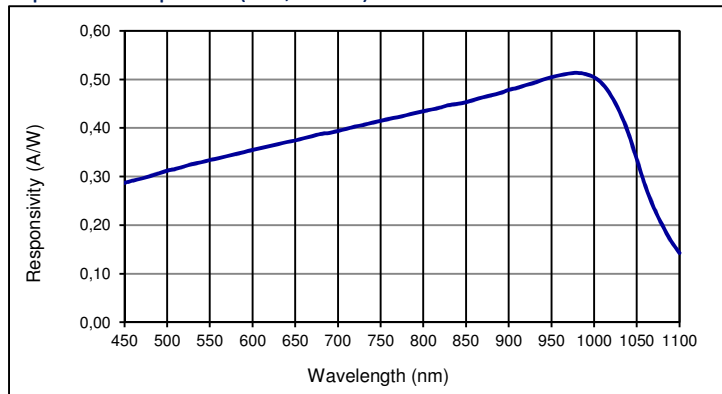
- X-ray inspection
- Photometry
- Array assemblies

**RoHS**

2011/65/EU


**Absolute maximum ratings**

Symbol	Parameter	Min	Max	Unit
$T_{STG}$	Storage temp	-20	80	°C
$T_{OP}$	Operating temp	-10	60	°C
$V_{R(OP)}$	Operating voltage	-	10	V
$I_{PEAK}$	Peak DC current		10	mA

**Spectral response (0 V, 23 °C)**

**Electro-optical characteristics @ 23 °C**

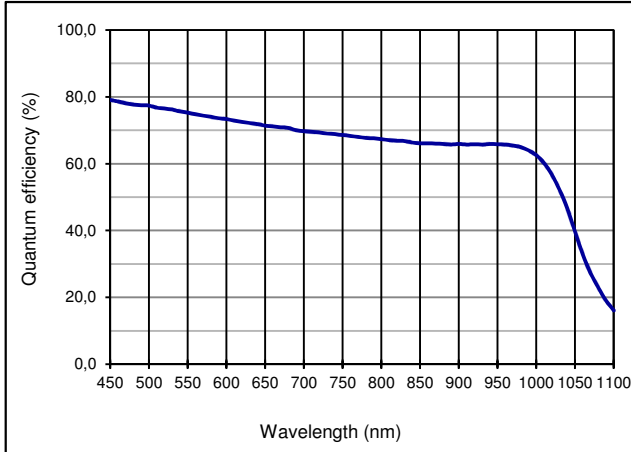
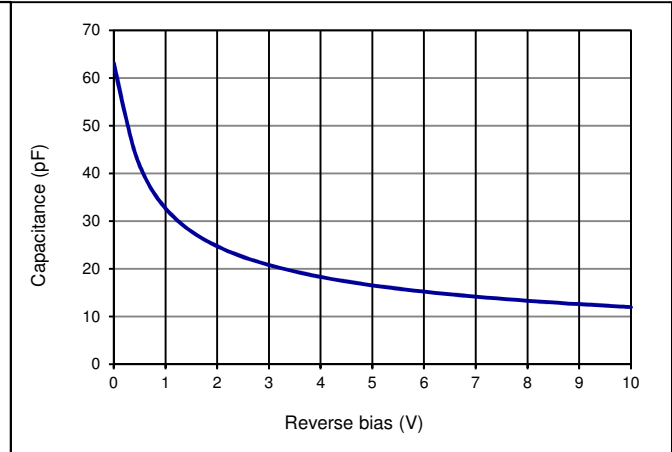
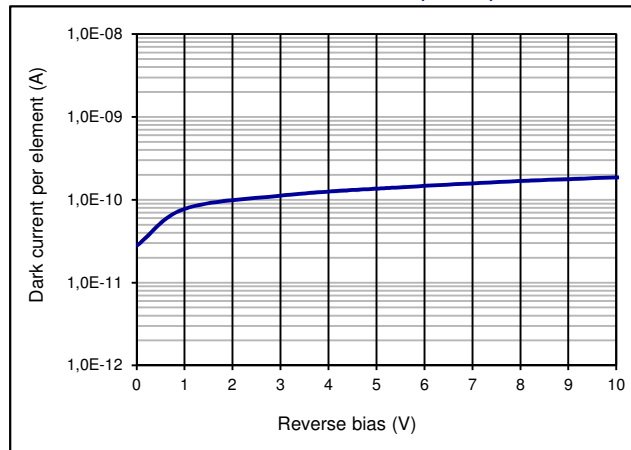
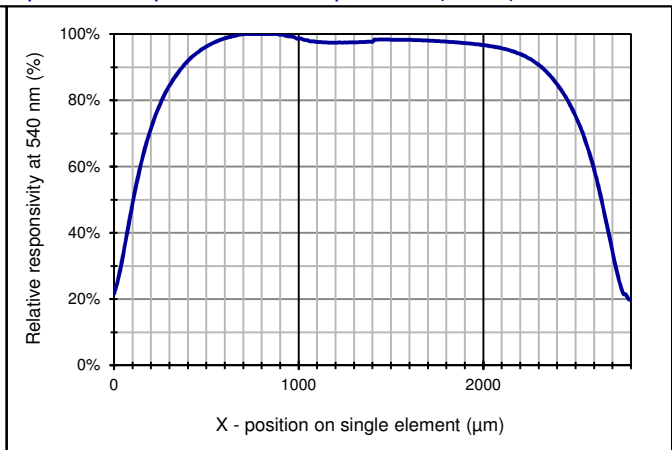
Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	No of elements			1		
	Chip area			2800 x 2800		μm
	Diode area			6.211		mm <sup>2</sup>
$I_D$	Dark current	$U_R = 10 \text{ mV}$ ; per element		15	100	pA
		$U_R = 10 \text{ V}$ ; per element		250	2000	pA
$C$	Capacitance	$U_R = 0 \text{ V}$ ; per element		65	80	pF
		$U_R = 10 \text{ V}$ ; per element		12		pF
	Responsivity	$U_R = 0 \text{ V}$ ; $\lambda = 490 \text{ nm}$		0.30		A/W
		$U_R = 0 \text{ V}$ ; $\lambda = 540 \text{ nm}$		0.33		A/W
$t_R$	Rise time	$U_R = 0 \text{ V}$ ; $\lambda = 540 \text{ nm}$ ; $R_L = 50 \Omega$		25		μs
$R_{Sh}$	Shunt resistance	$U_R = 10 \text{ mV}$	100	666		MΩ
$V_{BR}$	Breakdown voltage	$I_R = 2 \mu\text{A}$	10	15		V
	N.E.P.	$V_R = 10 \text{ mV}$ ; $\lambda = 540 \text{ nm}$		6.6 E-15	1.7 E-14	W/√Hz

**European, International Sales:**


First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com

**USA:**

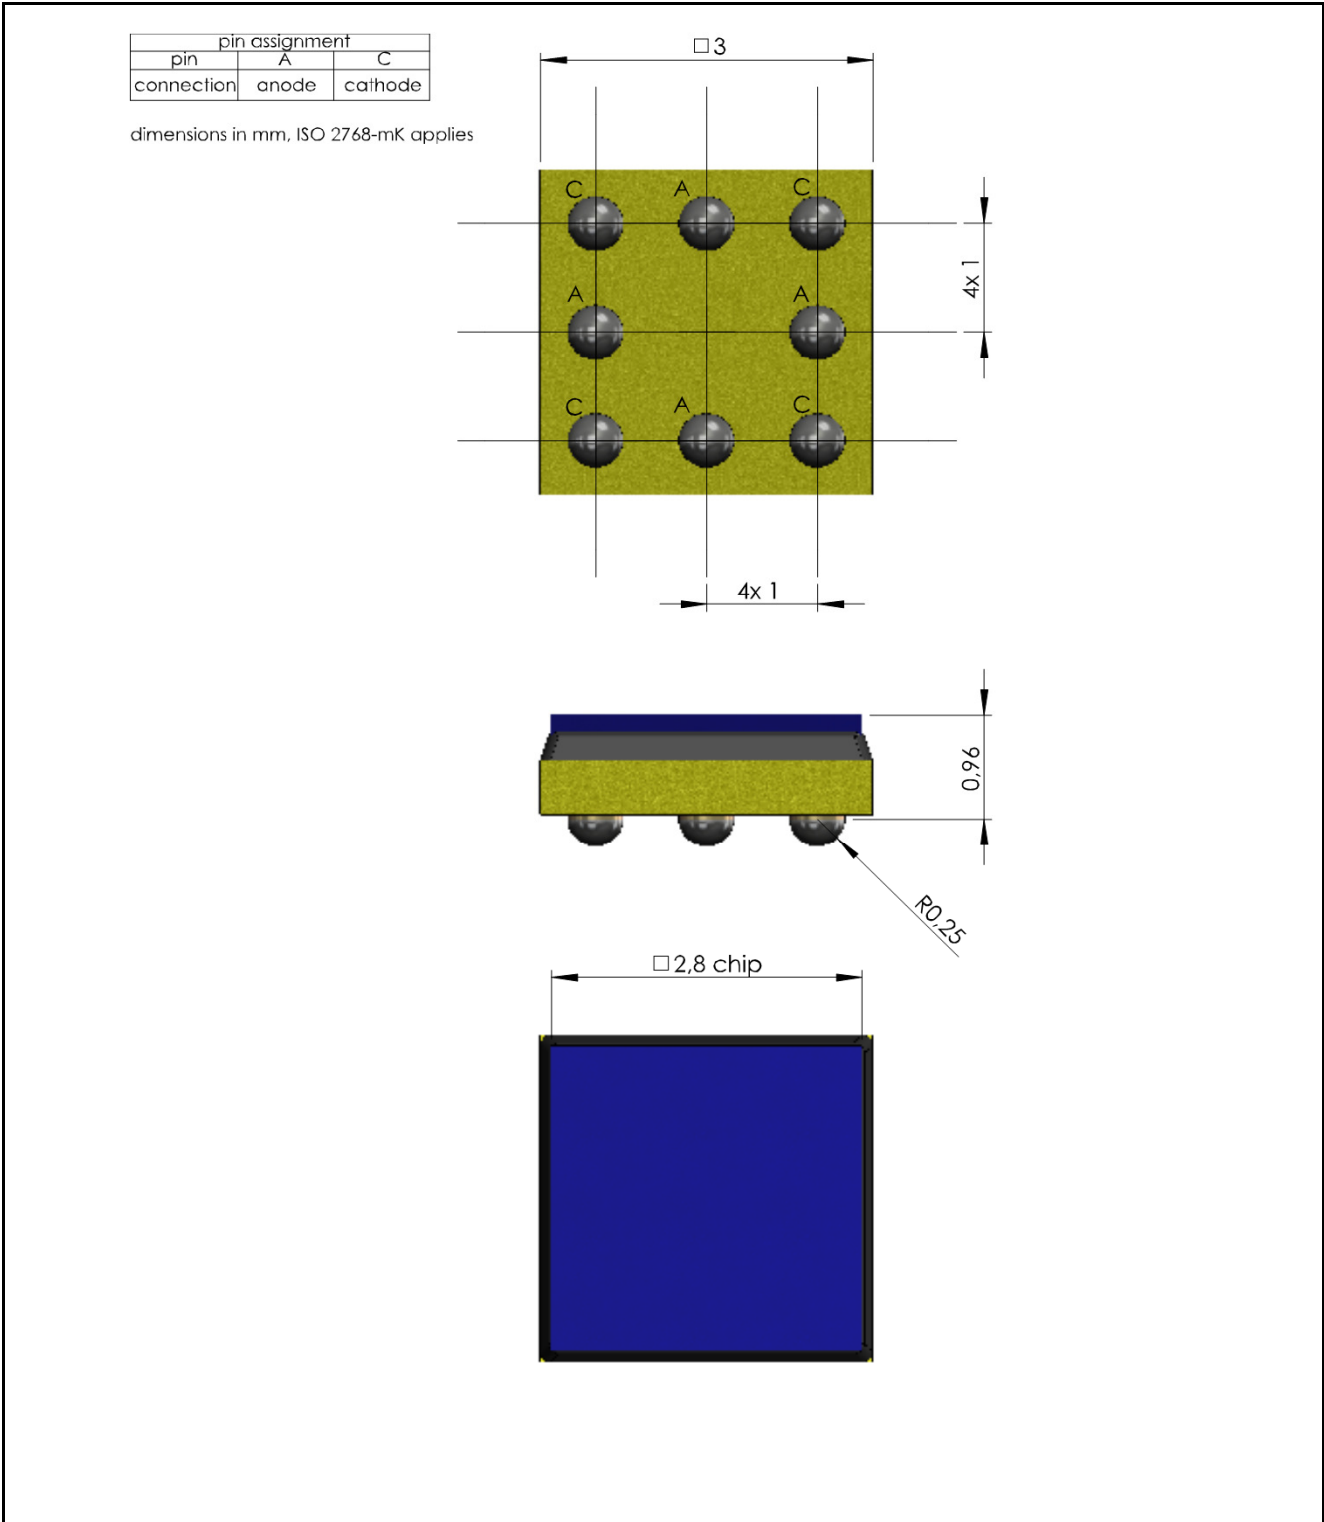

First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com

**Quantum efficiency (23 °C)**

**Capacitance as fct of reverse bias (23 °C)**

**Dark current as fct of reverse bias (23 °C)**

**Spectral response as fct of position (23 °C)**

**European, International Sales:**


First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com

**USA:**


First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com

**Technical Drawing Package:**


Handling: Please refer to document "Instructions for handling and processing"

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

**European, International Sales:**


First Sensor AG  
 Peter-Behrens-Strasse 15  
 12459 Berlin  
 Germany  
 T +49 30 6399 2399  
 F +49 30 639923-752  
 sales.opto@first-sensor.com

**USA:**


First Sensor Inc.  
 5700 Corsa Avenue #105  
 Westlake Village  
 CA 91362 USA  
 T +1 818 706 3400  
 F +1 818 889 7053  
 sales.us@first-sensor.com