



1.6T

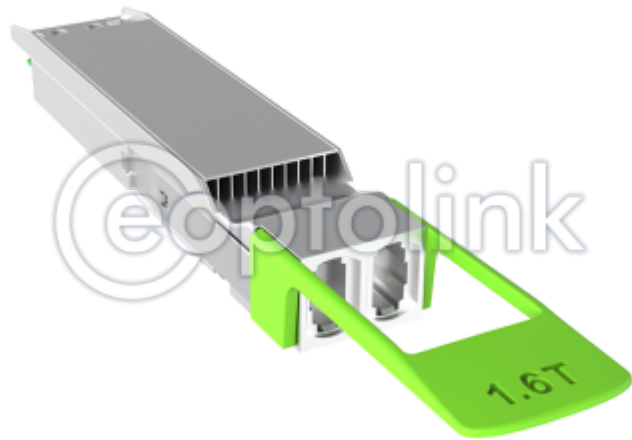

1.6T OSFP

Eoptolink OSFP 1.6T transceivers firmware supports CMIS 5.0 and newer release. We offer transceivers for DR8, DR8-2, 2VR4, 2FR4 and 4FR2 interfaces. Our vertical integration for optical engines enables leading performance and per consumption.

OSFP 1.6T DR8-2

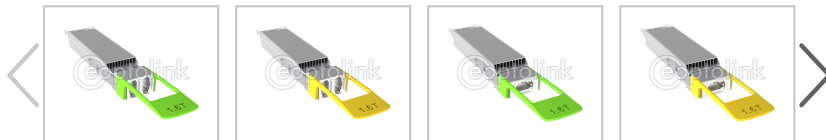

Feature

[Ordering information](#)

- Supports 212.5Gbps/s
- Single 3.3V Power Supply
- 212.5Gbps (PAM4) optical interface
- 212.5Gbps (PAM4) electrical interface
- 106.25Gbps (NRZ) electrical interface
- Commercial case temperature range of 0°C to 70°C
- CMIS 5.0 or later version