


# High Nonlinear Optical Fibre (HNLf)

## Description


The nonlinear effect of optical fibre, such as stimulated Raman scattering (SRS), stimulated Brillouin scattering and optical Kerr effect, has many applications in the field of communications and optical signal processing. In the Kerr effect, refractive index of optical dielectric materials changes with luminous power, which will lead to a series of secondary effects, such as the self-phase modulation (SPM), cross phase modulation (XPM), four wave mixing (FWM), and the unsteady modulation. Optical Kerr effect can be used in optical parametric amplification, frequency conversion, phase coupling, pulse compression and generation, optical soliton transmission, etc.

The design of the high nonlinear optical fibre on several aspects need to be taken into account. Firstly, optical fibre should have high nonlinear to obtain effective nonlinear interaction. Secondly, optical fibre must have a lower loss in order to increase the effective length. Moreover, the dispersion of optical fibre should match various applications. Finally, the nonlinear optical fibre must have low polarization mode dispersion. For silica-based high nonlinear optical fibre, the design of the refractive index profile plays an important role to meet the above requirement. Small core effective area, low dispersion slope and cutoff wavelength which is much smaller than the working wavelength must be implemented at the same time in the design of high nonlinear optical fibre.

YOFC HNLfs not only have high nonlinear, and very low dispersion slope at the same time. YOFC uses W type to design profile which is flexible, and the cladding in low refractive index is introduced around the core step refractive index.

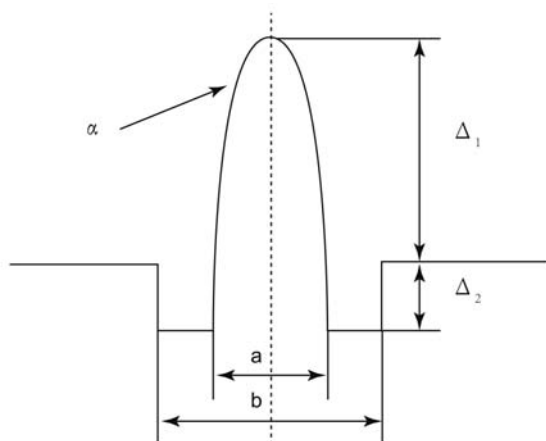

The refractive index profile sketch

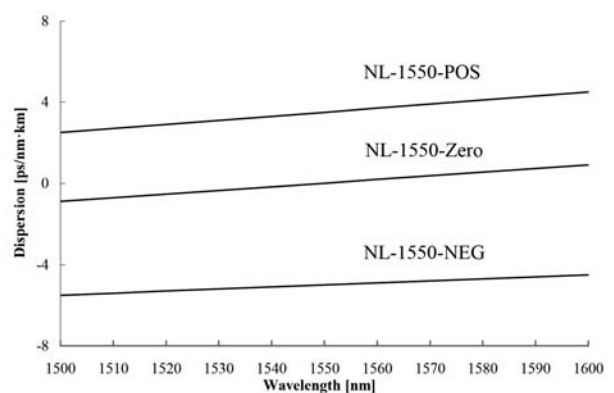

Three types of HNLf typical dispersion test curve

# High Nonlinear Optical Fibre (HNLF)

## Characteristics

- High nonlinear coefficient
- Zero-dispersion wavelength is adjustable in the s, c, l three band
- Low loss and low dispersion slope
- Weld with ordinary single-mode fibre with smaller additional loss

## Application

- Parametric amplification
- Wavelength conversion
- Pulse compression
- Supercontinuum source
- Light regenerator
- Discrete type (or lumped type) Raman amplifier

## Specifications

Fibre Type	NL 1550-POS	NL 1550-Zero	NL 1550-NEG
Part No.	NL1016-A	NL1016-B	NL1016-C
<b>Optical Properties</b>			
Workspace	C-wave band	C-wave band	C-wave band
Dispersion Slope@1550nm (ps/nm <sup>2</sup> · km)	<0.035	<0.030	<0.030
Dispersion@1550nm (ps/nm · km)	> 1	0.0 ± 1	< -1
Nonlinear Coefficient@1550nm (W <sup>-1</sup> km <sup>-1</sup> )	≥ 10	≥ 10	≥ 10
Attenuation Coefficient@1550nm (dB/km)	≤ 1.5	≤ 1.5	≤ 1.5
Cut-off Wavelength(nm)	<1480	<1480	<1480
Numerical Aperture(typical value)	0.35	0.35	0.35
<b>Geometry Properties</b>			
Cladding Diameter (μm)	125 ± 7	125 ± 7	125 ± 7
Cladding Non-circularity (%)	≤ 1	≤ 1	≤ 1
Core/Cladding Concentricity (μm)	≤ 0.5	≤ 0.5	≤ 0.5
Coating Layer (μm)	245 ± 10	245 ± 10	245 ± 10

\* Optical fibre welding is available.