


Innovation for the next generation

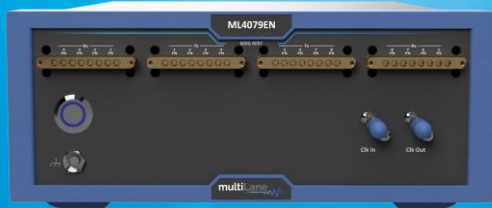

# ML4079EN

8 Channel | 61 GBd PAM4 & NRZ |  
800G BERT | SITOL | IEEE802.3ck Stress  
Testing Features

8 x 61 GBd NRZ/PAM4 BERT | SSPRQ, PRBS13Q &  
PRBS31Q | TX and RX Equalizers | Real FEC analysis |  
Jitter and Random Noise injection | Shallow  
Loopback Testing

## Summary

[Preliminary datasheet](#)

The move to 8x112 Gbps/lane has brought previously marginal aspect of testing to the fore. The 800G generation sees devices that are more sensitive to signal disruption in the form of jitter and noise than ever before. Stress testing device resilience to jitter and noise to glean an understanding not only of failure points, but the degree to which they can withstand increased disruptions is becoming an increasingly integral part of the testing process.

The ML4079EN is an 800G BERT tailored to meet these new considerations. This BERT supports 8x100 Gbps fiber technology, real hardware FEC encoding/decoding with idle ethernet traffic, signal to noise ratio (SNR) and histogram measurements, also allowing users to implement flexible transmitter and receiver equalization.

Crucially, the ML4079EN also features a suite of jitter and noise injection capabilities not only ensuring designs can pass the performance specifications outlined in IEEE802.3-2018 but highlighting how much these specifications can be exceeded; an ideal solution for stringent Engineering Validation Test (EVT) and Design Validation Test (DVT) cycles.

The ML4079EN runs on the flagship Multilane ThunderBERT GUI, providing a comprehensive picture of every aspect of DUT performance.

# ML4079EN

## 8 x 61 GBaud PAM4 BERT

### Introduction

The ML4079EN is a fully featured 800G BERT that can be configured for eight channels of 20-29 and 36-61 GBaud PAM4 or 20 – 29 and 36 – 61 Gbps NRZ.

The transmitters support all standard test patterns mandated by IEEE802.3ck stress testing and OIF such as PRBS13Q, SSPRQ, PRBS31Q, etc. Tx can also be programmed to output a user-defined pattern.

The ML4079EN supports transmitter and receiver equalization to overcome signal integrity impairments due to channel losses or reflections.

Additionally, users can opt to programmatically add an ISI channel equivalent to a frequency-dependent attenuator with 1 to 9 dB loss at Nyquist.

The ML4079EN is specifically designed to inject jitter and crosstalk noise (interference) into its signal generation. This capability is uniquely fully integrated into the BERT and does not require any external equipment.

### Key Features

#### Transmit

- Data Rates: 20-29 & 36-61 GBaud (116 Gbps)
- Ability to tune the bit rate in steps of 100 kbps and find the RX PLL locking margin
- Independent control of inner eye levels
- Up to 1.2 Vppd output swing
- Supports Gray coding
- Error injection
- 3-tap Pre- and Post-emphasis or 7-tap linear FFE

- Real hardware FEC. SER and FEC measurements and margin available on channels individually as well as on 100G, 400G blocks
- Available patterns:
  - PRBS7/9/11/13/15/16/23/31/58
  - PRBS13Q, PRBS31Q
  - SSPRQ
  - Square wave
- Burst and random noise injection
- FM (Frequency Modulation) for Sinusoidal and Random Jitter Injection (SJ Injection up to 20MHz+, 3x IEEE)
- PM (Phase Modulation) for SJ, RJ, and BUJ Injection ((SJ Injection up to 20MHz+, 3x IEEE)
- Jitter and Interference tolerance and marginal automated testing following IEEE 802.3ck

#### Receive

- SNR monitoring over time
- PAM histogram monitor
- Error-detection on following patterns:
  - PRBS 7/9/11/15/16/23/31
  - PRBS13Q and PRBS31Q
- Automatic pattern detection
- LOS indicators

#### General

- LabView driver and Python wrapper available.
- Shallow Loopback testing
- API libraries with documentation.

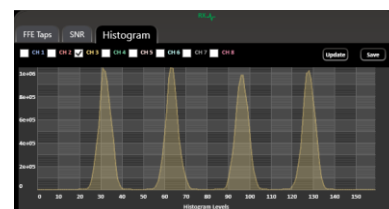


Figure 1: PAM4 eye histogram

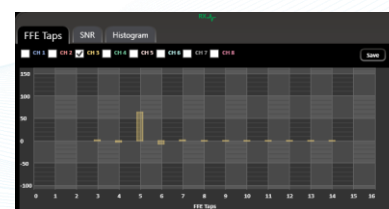


Figure 2: RX FFE Taps

## Jitter Tolerance – JTOL Capabilities

When using high-speed signals, it is imperative to take into consideration the effect of jitter components coming from different sources and affecting the signal quality. For this reason, jitter tolerance is no longer an option but a hard requirement to characterize the DUTs.

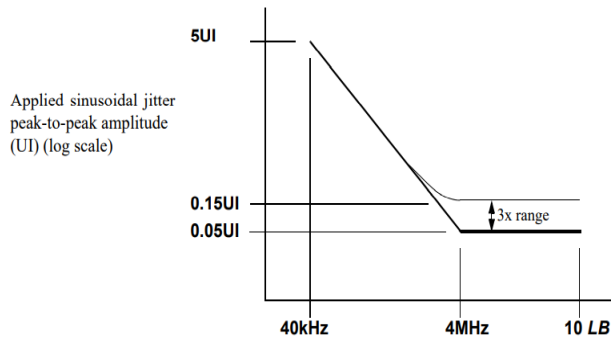


Figure 52-4—Mask of the sinusoidal component of jitter tolerance (informative)

Table 162-16—Receiver jitter tolerance parameters

| Parameter                | Case A | Case B | Case C | Case D | Case E | Case F | Units |
|--------------------------|--------|--------|--------|--------|--------|--------|-------|
| Jitter frequency         | 0.04   | 0.4    | 1.333  | 4      | 12     | 40     | MHz   |
| Jitter amplitude (pk-pk) | 5      | 0.5    | 0.15   | 0.05   | 0.05   | 0.05   | UI    |

Figure 3: IEEE Standard 802.3ck Stress Testing

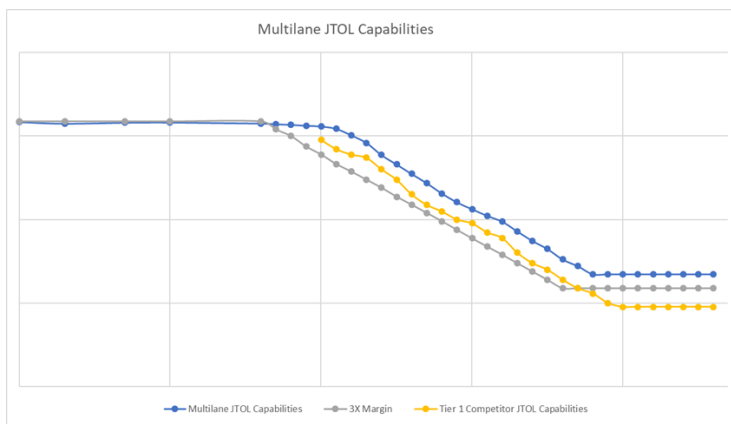
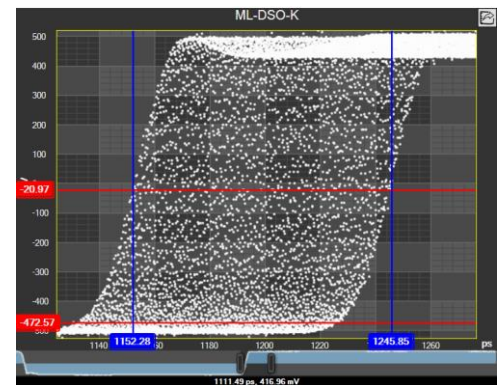
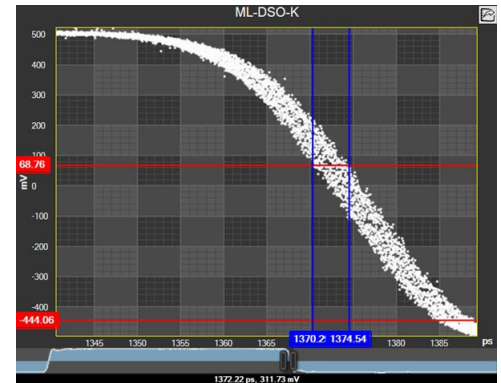


Figure 4: MultiLane Capability vs IEEE Mask

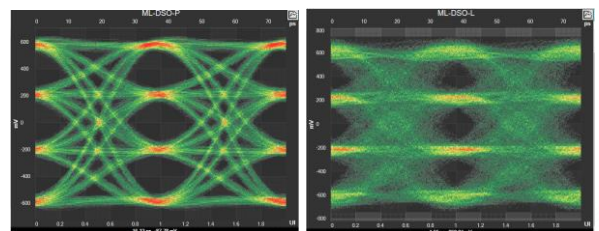


Figure 5: Jitter Measurements

### Jitter Injection Capabilities:

- Frequency Modulation Mode:
  - Sinusoidal Jitter (SJ) Injection: FM modulation is the basis for injecting sinusoidal jitter SJ on a PRBS pattern coming out of the BERT:
    - Calibrated Jitter Injection up to 20MHz and 3x IEEE 802.3ck Mask
  - Random Jitter (RJ) Injection at different amplitude
- Phase Modulation Mode: PM modulates the phase of the clock either in a sinusoidal way (SJ), a random way (RJ) or as BUJ (Bounded Uncorrelated Jitter):
  - SJ: Calibrated Jitter Injection up to 20MHz and 3x IEEE 802.3ck Mask



## IEEE Automated JTOL

- IEEE Standard based on selected line rate
- JTOL Testing on all the required IEEE Frequencies at different amplitudes
- JTOL Result and Margin Testing based on selected Target BER and BER Time



Figure 6: Automated IEEE JTOL

## Single Frequency Automated JTOL

- Single Frequency Selection from 1KHz to 20MHz
- JTOL and Margin Test on selected amplitude
- Pass/Fail Verdict based on Selected BER

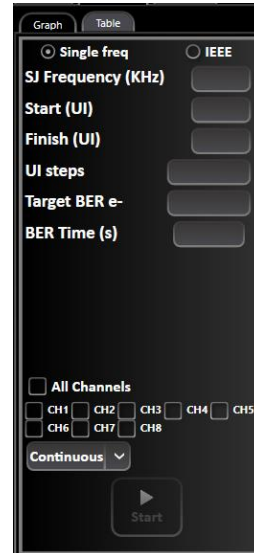


Figure 7: Automated Single Frequency JTOL

## Interference Tolerance – ITOL Capabilities

The ML4079EN enables a noise injection feature to emulate real-life crosstalk scenarios along with shallow loopback testing. Noise implementation can take the form of a continuous interference, burst crosstalk, or single shot noise and can be configured on each channel independently. The shallow loopback function works with a variety of traffic types including unframed PRBS, framed Ethernet and FEC traffic.

In addition, the ML4079EN follows the specifications of the IEEE Std 802.3-2018, IEEE Standard for Ethernet SECTION SIX, and Annex 93C stating that the noise shall be Gaussian white noise with a flat frequency response following the Mask in Figure 9, and a Crest Factor greater than 5.

| Measurement    | Value     |
|----------------|-----------|
| Crest Factor   | 8.0686    |
| Noise Flatness | 2.4 dBm   |
| $V_{rms}$      | 135.13 mV |

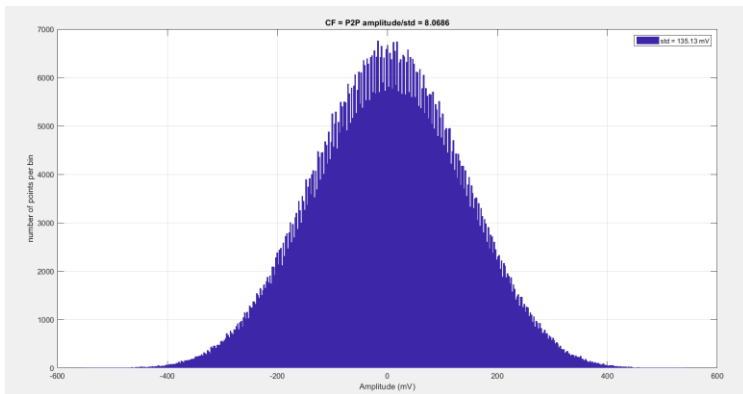


Figure 8: Crest Factor Measurement: Gaussian Noise

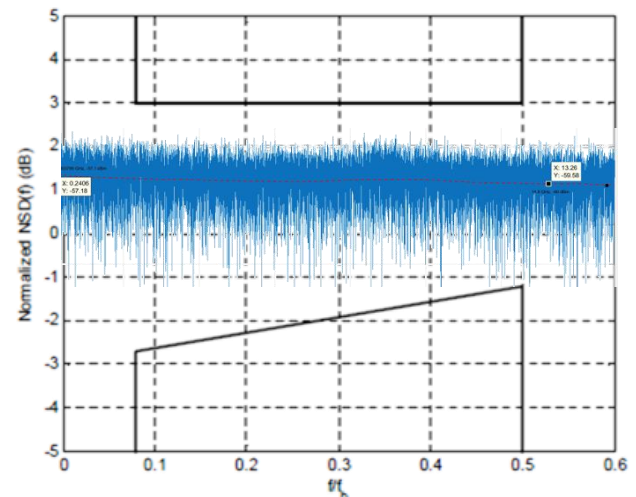


Figure 9: Noise Flatness

### Random Noise Injection

- Independent Control on each channel
- Calibrated Noise Injection
- Up to 100mV Noise Injection

### Interference Tolerance Automated Test ITOL:

- Random Noise Effect on BER
- Pass/Fail Verdict based on each noise step and selected BER

Using ThunderBERT GUI, both instant and accumulated BER, FEC and SER measurements can be displayed and monitored:

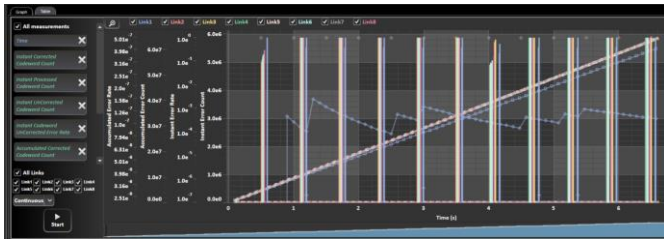


Figure 10: ThunderBERT GUI Screenshots showing BER measurements

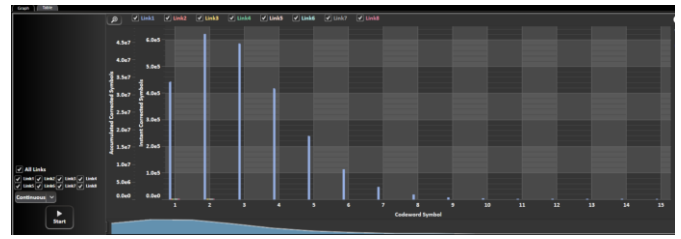


Figure 11: ThunderBERT GUI Screenshots showing SER measurements

## Shallow Loopback mode

Figure 13 depicts a ML4079EN accepting traffic from an external 800GE switch, looping the traffic internally and re-transmitting it back to the RX side of the host. This can be used to test the robustness of the host port, by adding an increasing amount of crosstalk noise and understanding where the receiver starts producing errors.

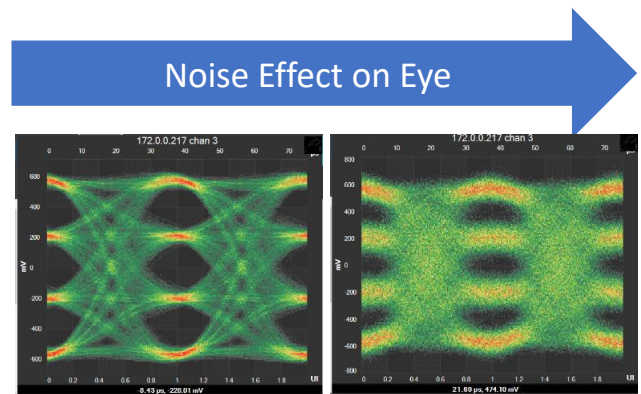


Figure 12: Eye Diagram before and after noise injection – PAM4 modulation

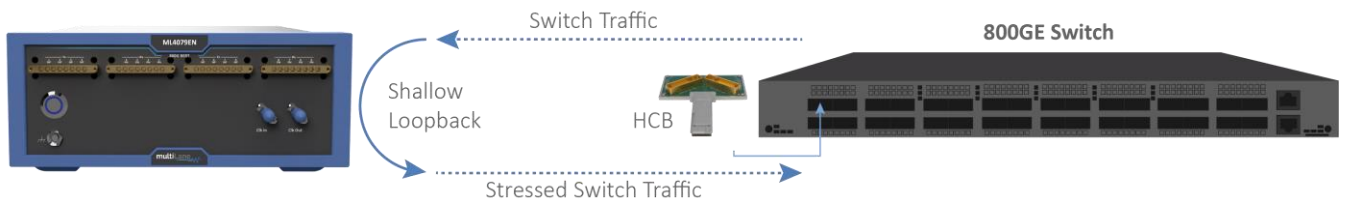


Figure 13: Shallow Loopback using ML4079EN and 800G switch

### RLM Stress Test: Inner/Outer Eye Control on PAM4 Mode:

ML4079EN supports a full Inner and Outer Eye Control Range using the ThunderBERT GUI. This feature enables the robustness testing of the transmitted signal by changing the Inner/Outer Eye settings and measuring the Level separation mismatch ratio RLM. The obtained value is compared to the IEEE 802.3 Transmitter Characteristics Value for Compliance Evaluation. Figure 14 illustrates 3 different Inner/Outer Eye settings using the ML4079EN.

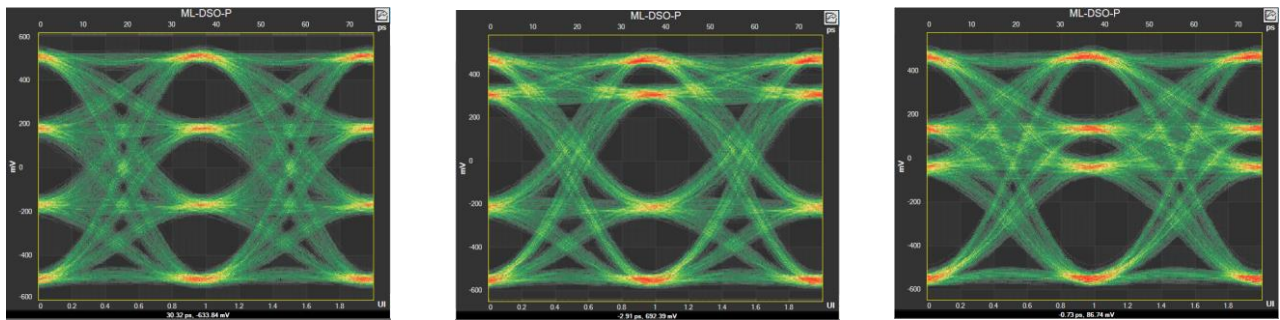


Figure 14: Inner/Outer Eye Control using ML4079EN



## Specifications

| Parameter                             |                 | Specifications   |
|---------------------------------------|-----------------|--|
| Bit Rates                             |                 | PAM4: 20 – 29 GBaud / 36 – 61 GBaud<br>NRZ: 20 – 29 Gbps / 36 – 61 Gbps                |
| TX Amplitude Differential             |                 | 0 – 1200 mVpp (defined at front panel connector)                                       |
| Patterns                              |                 | PRBS 7/9/11/13/15/16/23/31/58/9_4 SQ16, SQ32, LIN, CJT,<br>JP0838, SSPRQ, User Defined |
| TX Amplitude Adjustment               |                 | Steps of 1 mV  |
| Pre-emphasis resolution               |                 | 1000 steps   |
| Pre- / Post-emphasis                  |                 | 6 dB   |
| Equalizing Filter Spacing             |                 | 1 UI   |
| Random Jitter RMS <sup>1</sup>        |                 | < 290 fs   |
| Rise/ Fall Time (20–80%) <sup>1</sup> |                 | < 10 ps  |
| Coding                                |                 | Gray coding supported  |
| FEC (up to 800G)                      |                 | KP (100G, 400G)  |
|                                       |                 | KR (100G)  |
| Output Return Loss up to 10 GHz       |                 | < -15 dB   |
| Output Return Loss (16-25 GHz)        |                 | < -10 dB   |
| Error Detector input range            |                 | 50 – 800 mV differential   |
| TX/RX connectors                      |                 | 4x 8 channel M-SMPM foot print on front channel  |
| Reference clock<br>Output             | Reference clock | 156.25 MHz   |
|                                       | Monitor clock   | Rate division 4/8/16/32/128/256  |
| Diff. Input Return Loss               |                 | Better than 10 dB  |
| Eye monitor resolution                |                 | 8 bits horizontal across 2 UI / 9 bits vertical  |
| Clock Input Range                     |                 | Up to 4.4 GHz  |
| Clock Input Amplitude                 |                 | 200 – 1000 mV  |
| Input Impedance                       |                 | 50 Ω   |
| Ambient Temperature                   |                 | 0 – 75 °C  |
| Power                                 |                 | 110 V, 1.4 A or 220 V, 0.9 A – 50/60 Hz  |

<sup>1</sup> With appropriate pre and post emphasis settings and 50 GHz scope. Trigger from adjacent data channel rate/8



## Mechanical Dimensions

The ML4079EN is a benchtop instrument that fits in a 19-inch 2U rack. Two ML4079ENs arranged side by side take up one 2U slot in a rack. MultiLane also supplies the needed brackets.



## Ordering Information

| Option          | Description   |
|-----------------|---|
| <b>ML4079EN</b> | 800G BERT (8 CH 56 GBd PAM4) with crosstalk noise injection                         |
| <b>FEC</b>      | Real Hardware FEC analysis  |
| <b>SITOL</b>    | Stressed Input Tolerance: Jitter & Interference Tolerance capabilities, Margin Test |
| <b>3YW</b>      | Total 3-year warranty   |
| <b>CAL</b>      | Single calibration  |
| <b>3YWC</b>     | Total 3-year warranty with 3 annual calibrations                                    |

## Recommended Accessories

| Instruments     | Recommended           | Comments  |
|-----------------|-----------------------|---|
| <b>ML4079EN</b> | 4x MLCBMS-2.4-25-B-M  | 4x 8-channel 10-inch (25 cm) cable, M-SMPM type B male to 2.4 mm male connector               |
| <b>ML4079EN</b> | 4x MLCBMS-2.4-25-B-F  | 4x 8-channel 10-inch (25 cm) cable, M-SMPM type B male to 2.4 mm female connector             |
| <b>ML4079EN</b> | 4x MLCBMS-2.4-60-B-M  | 4x 8-channel 24-inch (60 cm) cable, M-SMPM type B male to 2.4 mm male connector               |
| <b>ML4079EN</b> | 2x MLCBMS-67G-25-B-LB | 2x 8-channel 10-inch (25 cm) loopback cable, M-SMPM to M-SMPM with 67 GHz bandwidth connector |
| <b>ML4079EN</b> | 4x MLCBMS-1.85-30-B-M | 4x 8-channel 12-inch (30 cm) cable, M-SMPM type B male to 1.85 mm male connector              |
| <b>ML4079EN</b> | 4x MLCBMS-1.85-30-B-F | 4x 8-channel 12-inch (30 cm) cable, M-SMPM type B male to 1.85 mm female connector            |
| <b>ML4079EN</b> | 4x MLCBMS-1.85-60-B-M | 4x 8-channel 24-inch (60 cm) cable, M-SMPM type B male to 1.85 mm male connector              |

Please contact us at [sales@multilaneinc.com](mailto:sales@multilaneinc.com)

**North America**

48521 Warm Springs Blvd.  
Suite 310  
Fremont, CA 94539, USA  
+1 510 573 6388

**Worldwide**

Houmal Technology Park  
Askarieh Main Road  
Houmal, Lebanon  
+961 81 794 455

**Asia**

7th Floor-2, No. 156  
Sec. 2, Dongda Road, North District,  
Hsinchu City 300, Taiwan (R.O.C.)  
+886 3 5744 591

**UAE**

Building 4WA, Office 420  
Dubai Airport Freezone Authority,  
Dubai, UAE  
+971 4 548 7 547