


# HLM-40U

## High Power 40GHz Limiter

### DEVICE OVERVIEW

#### General Description

The HLM-40 is a high-power GaAs Schottky diode signal limiter featuring high IP3 and high power handling. It offers low insertion loss and low return loss from DC through Ka band and has a typical 1dB compression point of 15dBm. Its high power handling makes it ideal for protecting sensitive components and for applications requiring high linearity.



[Download s-parameters here](#)

#### Features


- DC to 40 GHz limiter
- 20W Peak Power (pulsed), 4W CW
- 18dBm Flat Leakage @ 1W CW
- Typical P1dB of 15dBm

#### Applications

- RF Transceivers
- Test and Measurement Equipment
- SATCOM

#### Functional Block

##### Diagram



#### Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification
HLM-40U	High Power 40GHz Limiter	U	<u>Standard</u>	REACH RoHS	Released	EAR99

## Table Of Contents


- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Port Configuration and Functions**
  - Port Diagram
  - Port Functions
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Electrical Specifications
  - Typical Performance Plots
- **Operation**
  - Application Information
- **Mechanical Data**
  - Outline Drawing

## Revision History




Revision Code	Revision Date	Comment
-	2019-09-01	Datasheet Initial Release
A	2019-10-01	Corrected References
B	2019-12-01	Updated Graphs
C	2023-02-01	Updated Outline Drawing

**Port Configuration and Functions**

**Port Diagram**

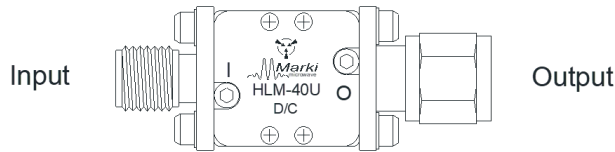

**Port Functions**

Port	Function	Connector Type	Description	Equivalent Circuit for Package
GND	Ground	-	U package ground is provided through metal housing and outer coax conductor.	
Input	Input	-	The input port is diode connected for the U package.	
OUT	Output	-	The output port is diode connected for the U package.	

## Specifications

### Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

### Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Weight	Package name: U	10g
Dimensions	-	13.21 x 14.22 mm









**Electrical Specifications**









The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the connectorized U-package limiter unless otherwise specified. Linear Specifications valid for input power up to the 0.1dB compression point.


Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Insertion Loss	-	0	40	-	1	-	dB
Return Loss	-	0	40	-	14	-	dB
Flat Leakage	-	20	20	-	16	-	dBm
Input P1dB	-	0	40	-	15	-	dBm
Flat Leakage at 1W	-	0	40	-	18	-	dB
Recovery Time <sup>1</sup>	-	0	40	-	10	-	ps

<sup>[1]</sup> Calculated based on equivalent capacitance and resistance

### Typical Performance Plots

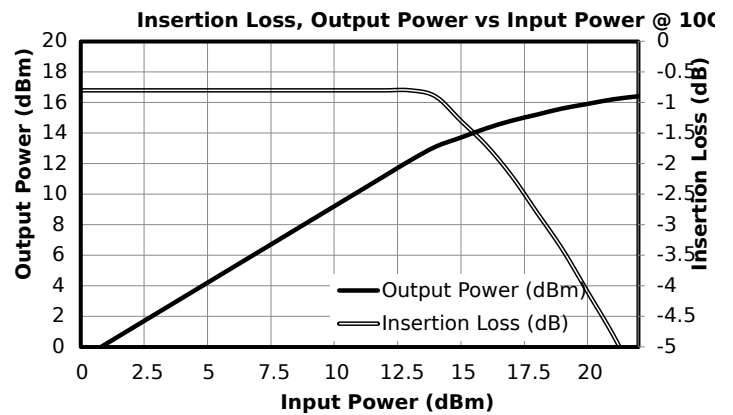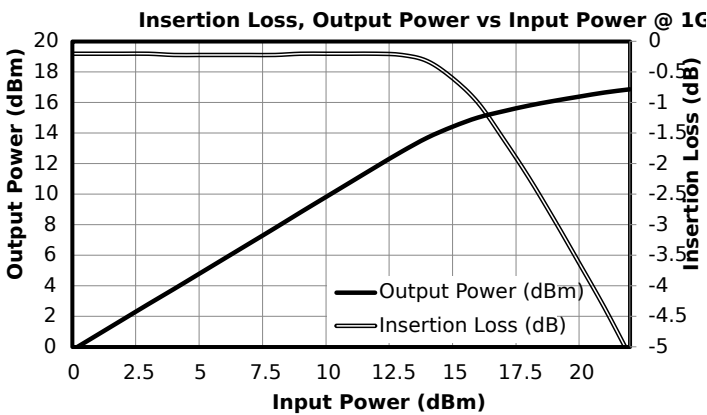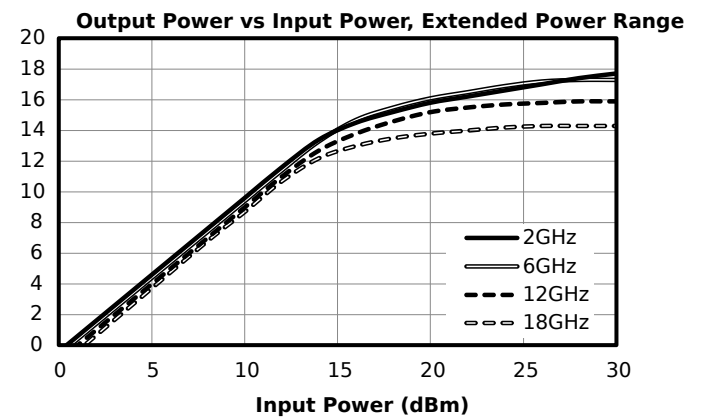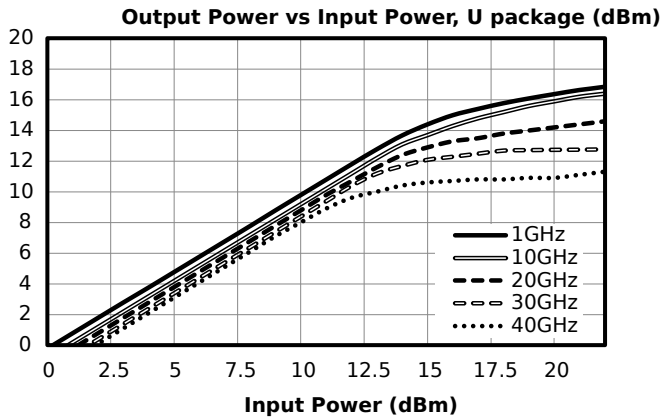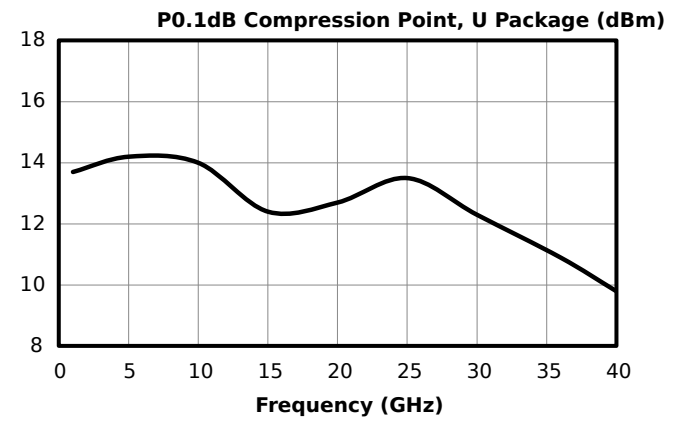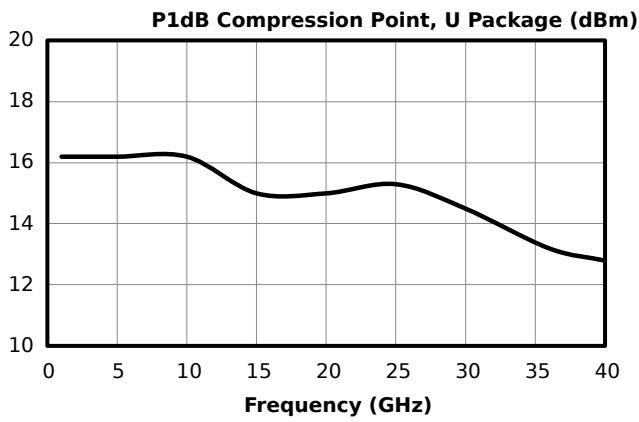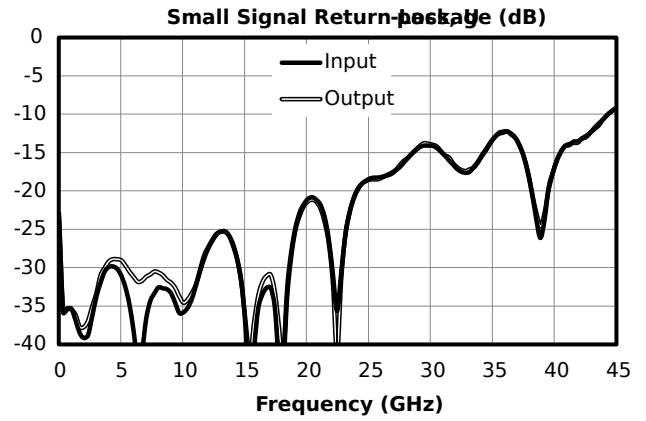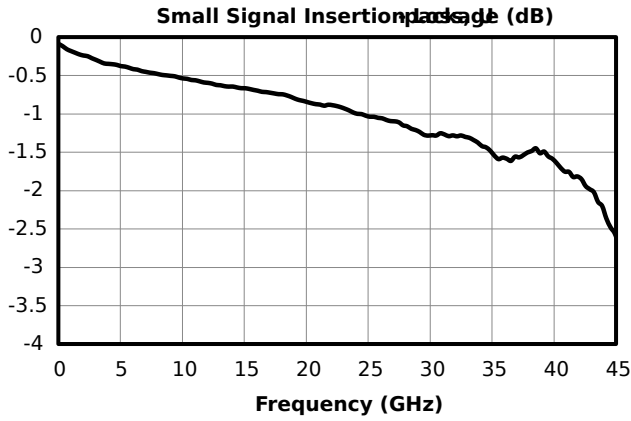

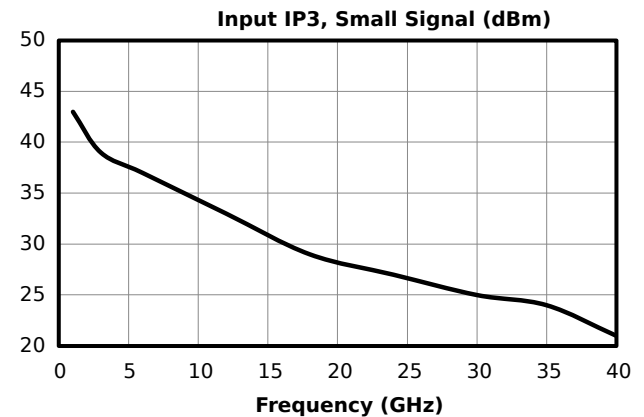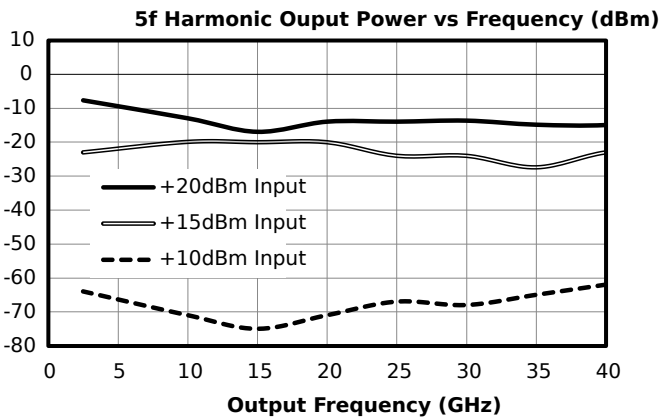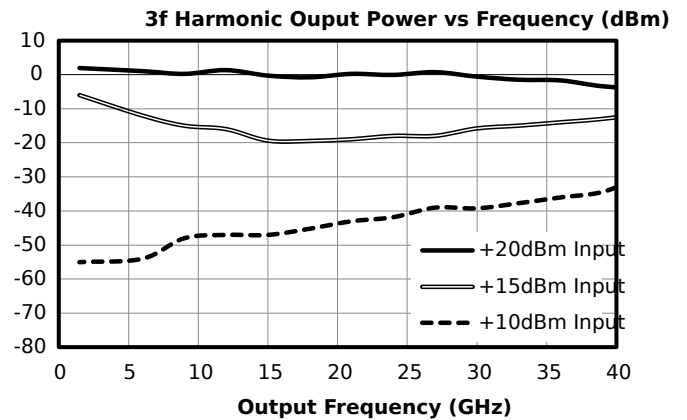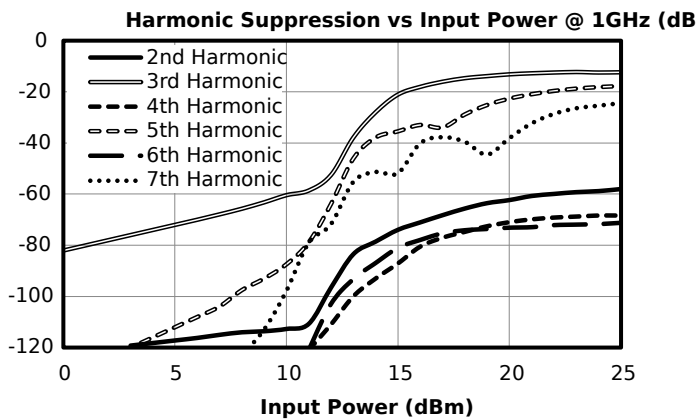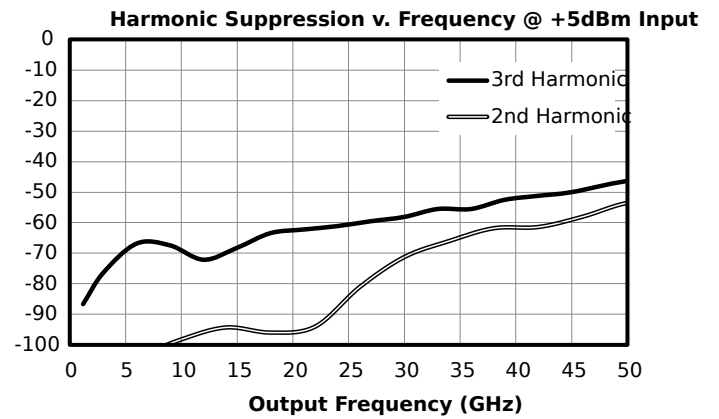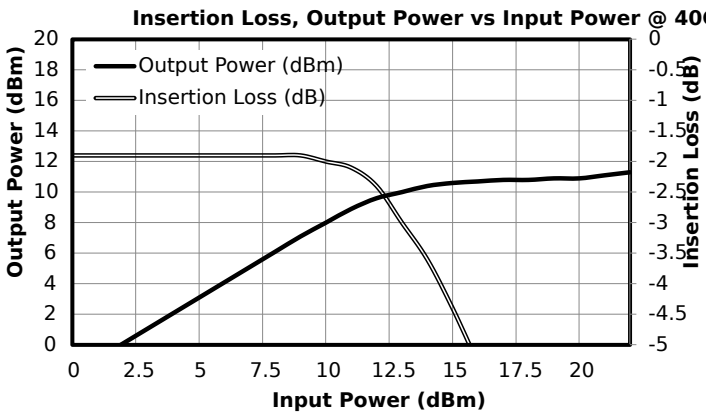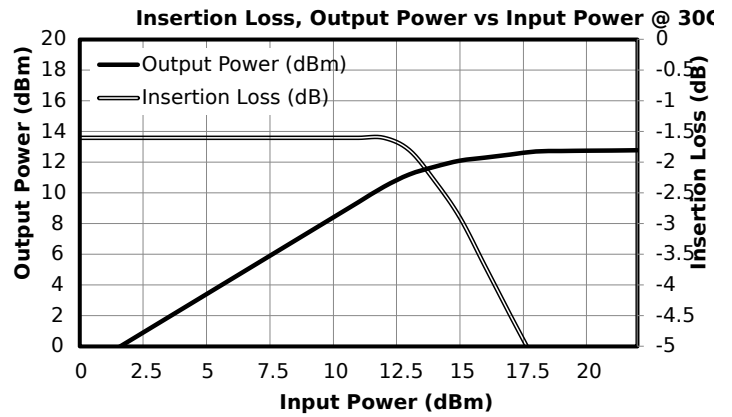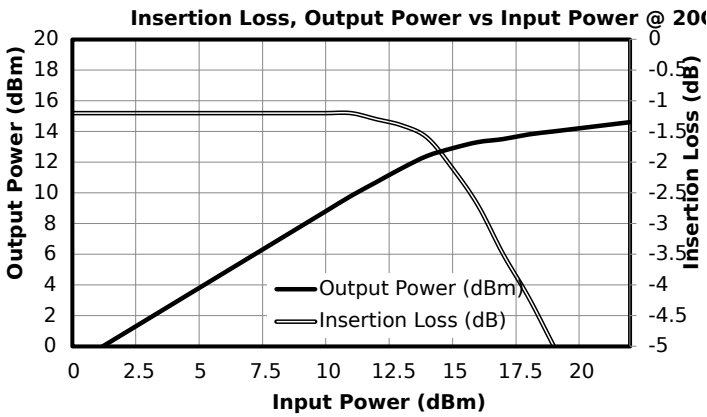

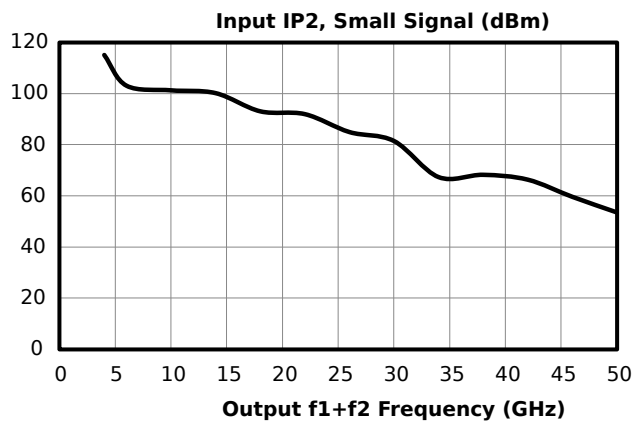



## Application Information

### Input Power at Observed Failure

Power handling specification is based on tests performed at different combinations of temperature and frequency. Input power was increased until catastrophic failure was observed. Results are shown in the following table. The power handling specification listed in section 3.1 is based on the worst observed power handling derated by 3dB.

Frequency	Maximum Average Power Handling		Unit
	at 25°C	at 85°C	
0.8 GHz	39	38	dBm
2.5 GHz	42	41	
6 GHz	40	39	


Frequency	Maximum Peak Power Handling <sup>5</sup>	Unit
2 GHz	35	W

Tested using a 1 $\mu$ s pulse, 1% duty cycle at 25°C

### Mechanical Data

### Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

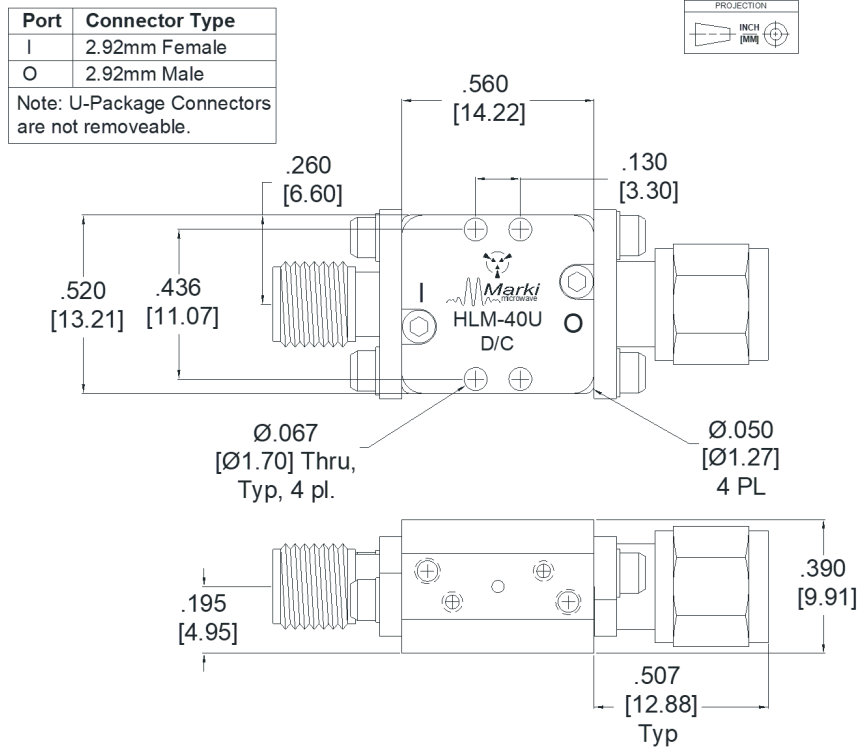

**DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2019, 2023, Marki Microwave, Inc