


Data sheet

Page 1 of 3

UV LED**EOLD-355-525**

Rev. 02, 2014

Radiation	Type	Case
Ultraviolet	Resin mold packaged	5 mm plastic lens

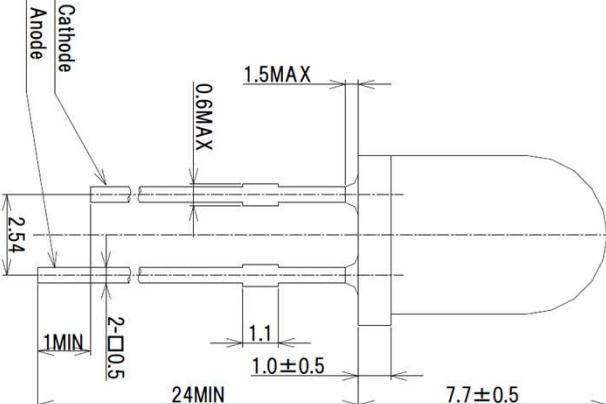		Description:
Dimension in mm High power, high-speed, narrow beam angle, high reliability, a zener diode is built in the protective circuit against static electricity, lead frame FE + AG coating, material silicone resin		
 		

Maximum Ratings

 T_{amb} = 25°C, unless otherwise specified

Parameter	Test Conditions	Symbol	Value	Unit
Forward current		I _F	25	mA
Peak forward current	t < 0.1 ms, t/T < 1/10	I _{FM}	100	mA
Reverse current	V _R = 5 V	I _R	85	mA
Power dissipation		P _D	100	mW
Operating temperature range		T _{amb}	-30 to +80	°C
Storage temperature range		T _{stg}	-30 to +85	°C
Lead soldering temperature	< 5 s, 3 mm from case	T _{sld}	260	°C

Optical and Electrical Characteristics

 T_{amb} = 25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V _F	I _F = 20 mA	3	3.6	4.2	V
Radiant power	Φ_e	I _F = 20 mA	0.8		1.2	mW
Peak wavelength	λ_p	I _F = 20 mA	353		360	nm
Viewing angle	ϕ	I _F = 20 mA		15		deg.
Spectral bandwidth at 50%	$\Delta\lambda_{0.5}$	I _F = 20 mA	10		20	nm

Data sheet

Page 2 of 3


UV LED

EOLD-355-525


Rev. 02, 2014

Optical and electrical characteristics


■ Forward voltage vs. Forward current

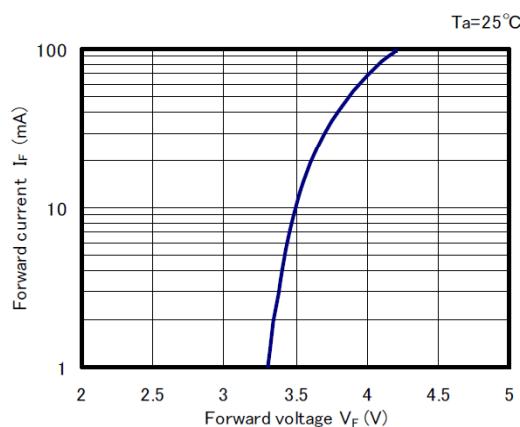


■ Forward current vs. Relative output power

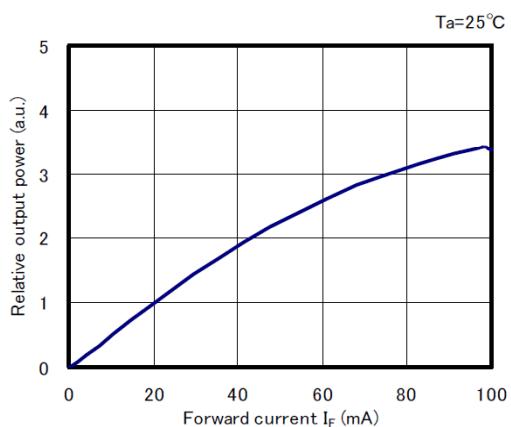

■ Ambient temperature vs. Relative output power


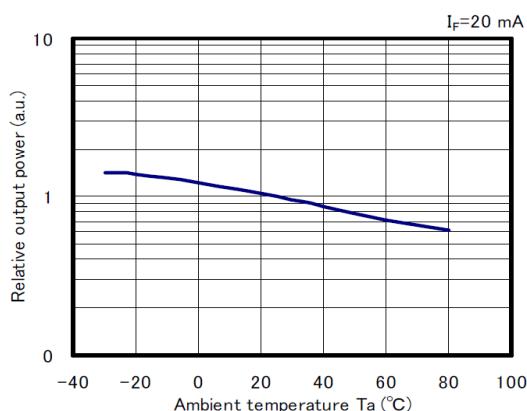


■ Ambient temperature vs. Forward voltage

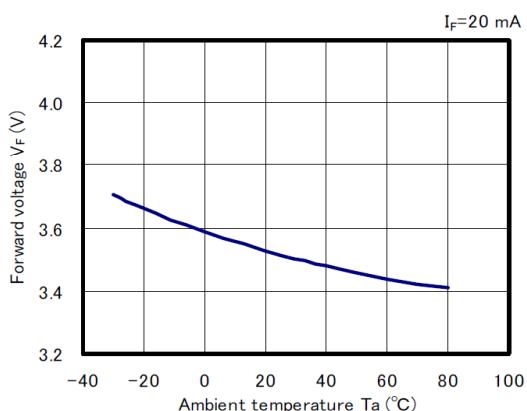

Data sheet**Page 3 of 3****UV LED****EOLD-355-525**

Rev. 02, 2014

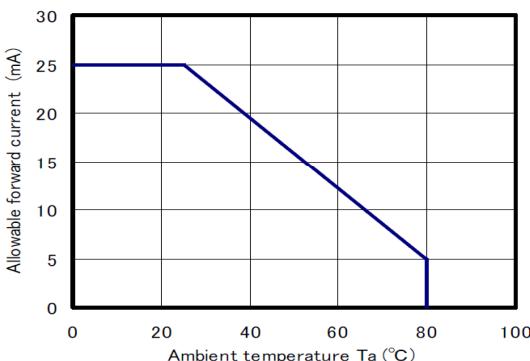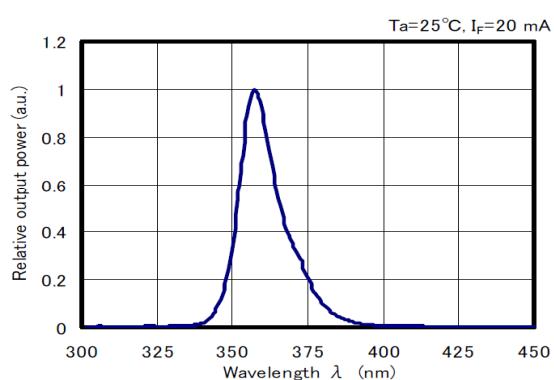**■ Ambient temperature vs.
Allowable forward current****■ Spectrum****■ Directivity**