



## F-Band Amplitude Detector, Small Signal, Positive

### Description:

**Model SFD-903144-08SF-P1** is an F Band amplitude detector that can be used for full or narrow band applications. The detector is zero biased and intended for small signal detection purposes. With a distinct circuitry design and careful diode selection, the detector exhibits high sensitivity and extremely flat output characteristics across the full waveguide operating bandwidth. The detector is designed to have a 10 MHz video bandwidth and a 1 MΩ video output impedance. The minimum detectable signal level is approximately -50 dBm.



### Features:

- Full Waveguide Band Operation
- High Sensitivity Without Tuning
- High Sensitivity Stability Over Broad Temperature Range

### Applications:

- Radar Systems
- Communication Systems
- Test instrumentations

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	90 GHz		140 GHz
Sensitivity*		300 mV/mW	
Sensitivity Flatness		±2.0 dB	
RF Input Power		-20 dBm	
RF Power Handling			+17 dBm
Video Bandwidth		10 MHz	
Detection Speed, Rise Time (50 Ohm Load)		5 Nano Second	
Output Voltage Polarity		Positive	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

\*Note: The sensitivity is for the input signal level -20 dBm or below.

### Mechanical Specifications:

Item	Specification
RF Port	WR-08 Waveguide with UG-387/U-M Flange
DC Port	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	FD-F1-A







## F-Band Amplitude Detector, Small Signal, Positive

### Typical Performance vs. Frequency

$P_{in} = -20$  dBm

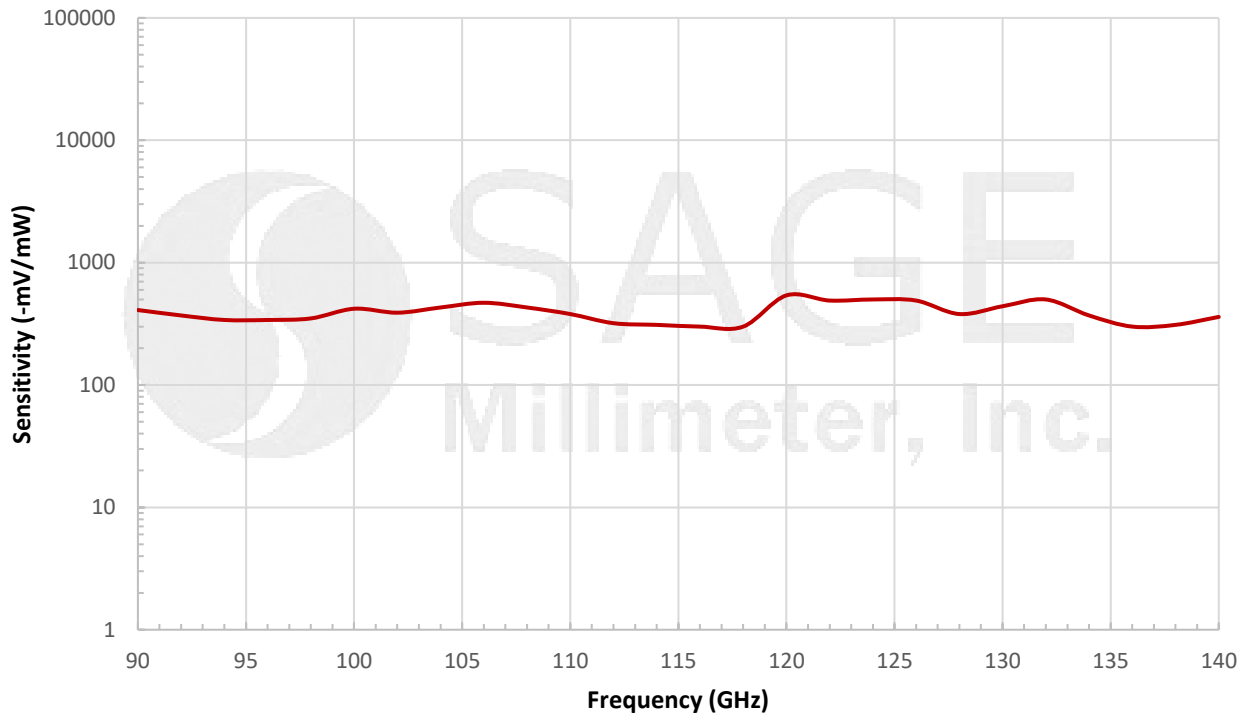


### Typical Detected Voltage vs. Input Power

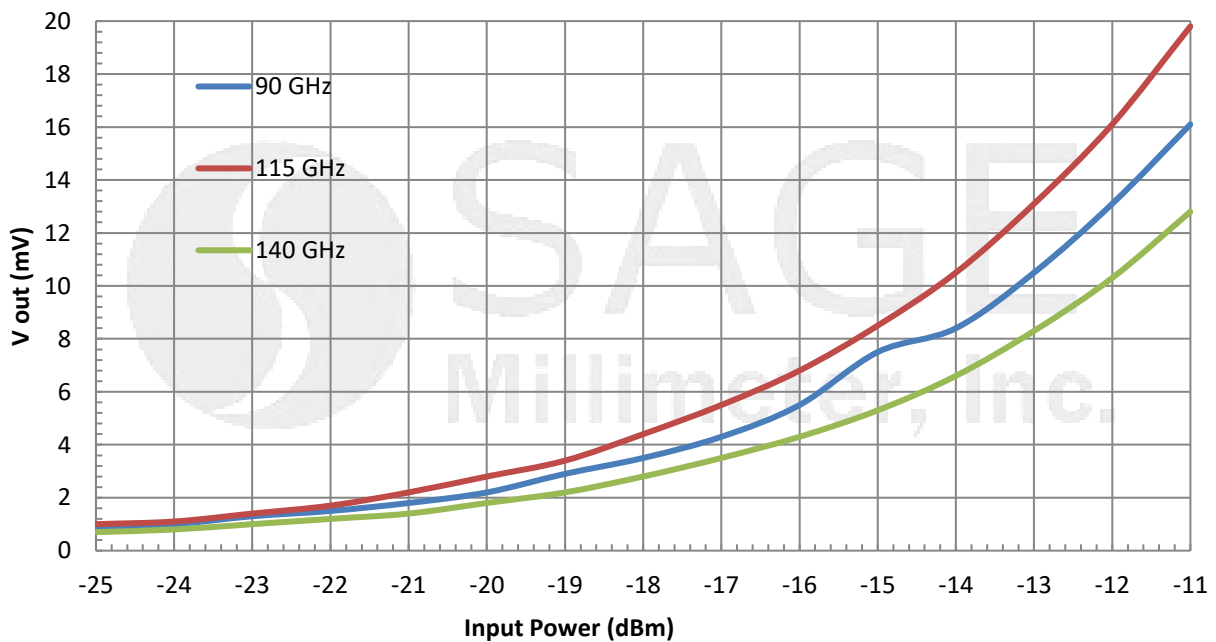

## F-Band Amplitude Detector, Small Signal, Positive

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

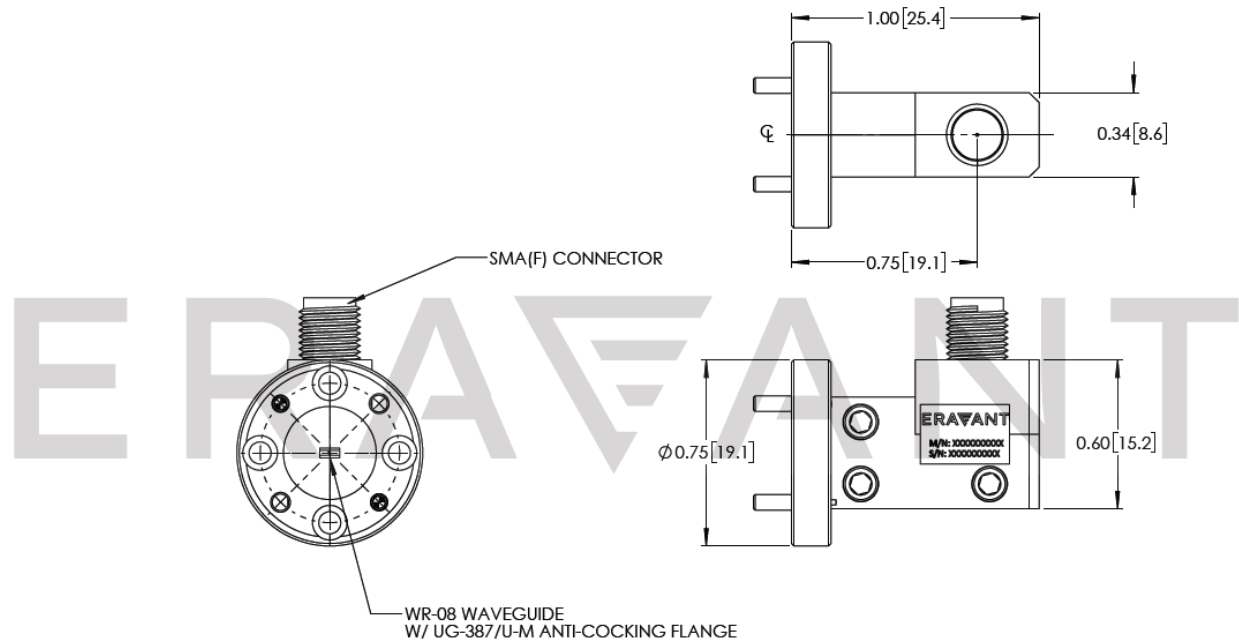

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- The negative output voltage polarity is offered under the model number **SFD-903144-08SF-N1**.
- The amplitude detector is a small signal detector. The sensitivity shown is for RF signal -20 dBm or lower.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

### Caution:

- Exceeding absolute maximum ratings will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Any foreign objects in the waveguide will cause performance degradation and can possibly damage the device.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.92 \pm 0.05$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

