



## WR-03 Amplitude Detector, Positive Output

### Description:

**Model SFD-224334-03SF-P1-M** is a WR-03 amplitude detector that can be used for full or narrow band applications. The detector is zero biased and intended for small signal detection purposes. The detector exhibits high sensitivity characteristics across the full waveguide operating bandwidth. The detector is designed to have a 10 MHz video bandwidth and a 1 MΩ video output impedance.



### Features:

- Full Waveguide Band Operation
- High Sensitivity

### Applications:

- Test Instrumentations
- THz Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	220 GHz		330 GHz
Sensitivity*		800 mV/mW	
RF Input Power		-20 dBm	
RF Power Handling			+10 dBm
Video Bandwidth		10 MHz	
Detection Speed, Rise Time (50 Ohm Load)		5 Nano Second	
Output Voltage Polarity	Positive		
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

\*Note: The sensitivity is for the input signal level -20 dBm or below.

### Mechanical Specifications:

Item	Specification
RF Port	WR-03 Waveguide with UG-387/U-M Flange
DC Port	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	FD-033-A







## WR-03 Amplitude Detector, Positive Output

### Sensitivity vs. Frequency

RF Input: -20 dBm

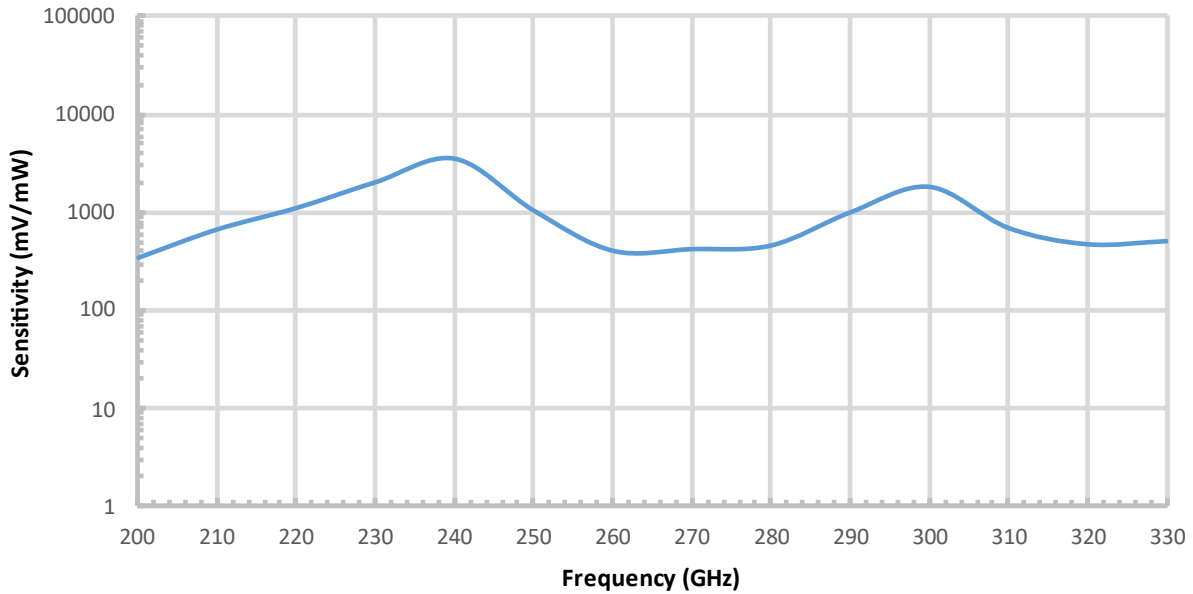

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

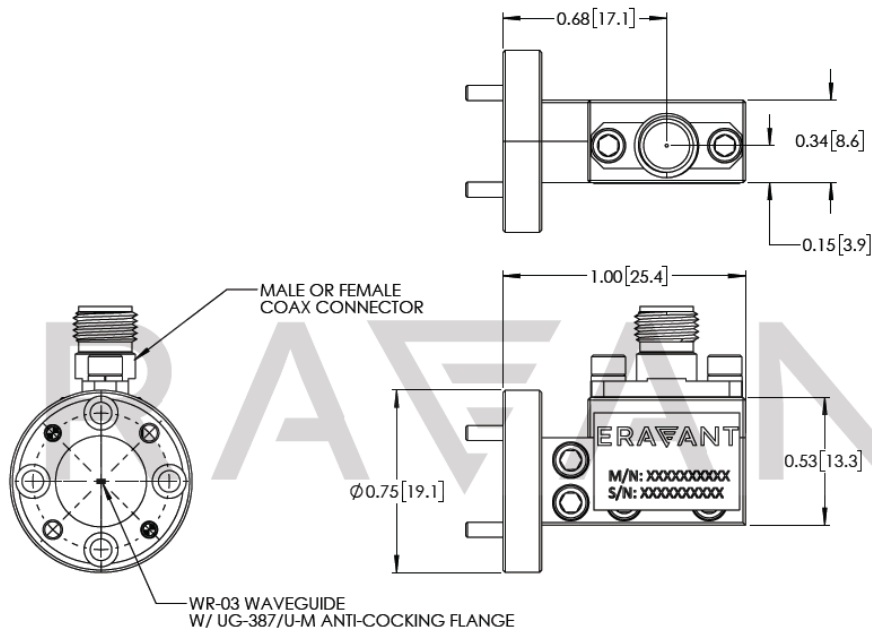



## WR-03 Amplitude Detector, Positive Output

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- The amplitude detector is a small signal detector. The sensitivity shown is for RF signal -20 dBm or lower.
- Eravant reserves the right to change the information presented without notice.

### Caution:

- Exceeding absolute maximum ratings will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Any foreign objects in the waveguide will cause performance degradation and can possibly damage the device.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.92 \pm 0.05$  Nm), should be applied. Eravant **torque wrench, model SCH-08008-S1, is highly recommended.**

