
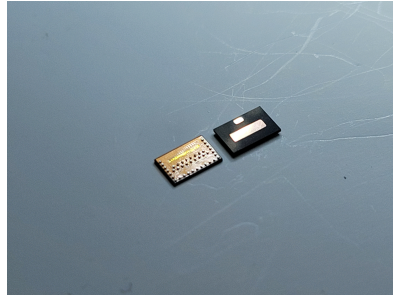


Products

Optical Engines for Interconnect

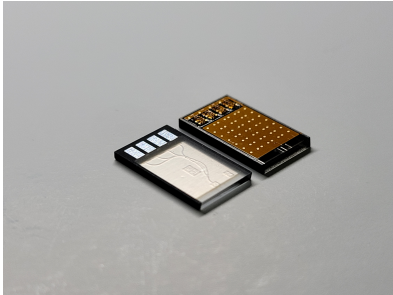

Optical Engine for 400G-DR4

The optical engine for 400G-DR4 transceiver meets 400GBASE-DR4 standard. The data transmission distance is up to 500m when using with single-mode fiber(SMF). The elements necessary for photoelectric conversion such as EML/monitor PD/photodiode array/TIA IC are packaged inside the provided optical engine. The pigtail LC connector can be directly attached to the optical engine.

Parameter	Value	Note
Max. data rate	425 Gbps	Aggregated data rate
Signal Rate	53.125 Gbaud	PAM4
Electrical Lane	4 ch	Tx: Input, Rx: Output
Optical Lane	4 ch	Tx: Input, Rx: Output
Package Size	(Tx) 11.03 × 7.5 × 1.0 mm ³ (Rx) 3.2 × 4.2 × 0.27 mm ³	Excluding BGA size
Channel Pitch	(Tx) 1.5 mm (Rx) 0.75 mm	-
Output Optical Power	> 0 dBm	Tx optical launch power per channel
Max. Transmission Distance	500 m	Under QSFP transceiver condition
Operation Temperature	0~70 °C	C-temp
Center Wavelength	1311nm	-
Laser Type	EML (Electro-absorption Modulated Laser)	-
Detector Type	PIN photodiode array	-
Data Sheet	-	Provided on customer's request
Test Result	-	Provided on customer's request



#916, SK V1 Centre, Seonyu-ro 9-gil 10, Yeongdeungpo-gu,
Seoul, Republic of Korea (07281)

Tel: +82-70-4651-0840

Fax: +82-70-4369-0810