



EB-FCP-130-105-0976-0.5-V

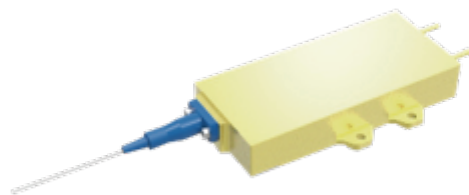

	Unit	Min	Typ	Max
Optical				
Center Wavelength	nm		976	
Wavelength Tolerance	nm		±0.5	
Output Power	W	130		
Spectral Width (FWHM)	nm			0.8
Numerical Aperture	-		0.16	
Fiber Core	μm		105	
Fiber Connector	-		Pigtail	
Fiber Length	m		2	
Electrical				
Power Conversion Efficiency	%		50	
Threshold Current	A		0.5	
Operating Current	A		13	
Operating Voltage	V		21	
Thermal				
Operating Temperature	°C		25	
Storage Temperature	°C		-35~75	
Wavelength Temperature Coefficient	nm / °C		0.02	
Others				
Anti Reflection Wavelength Range	nm		1030~1200	
Reflection Efficiency	dB		30	
Soldering Temperature	°C		260(10 sec)	

Remarks

1. Explanation of Item Number: EB (Everbright In Short) – FCP (Fiber CoupLed Module)–130 (Output Power) –105 (Fiber Core)– 0976V(Center Wavelength is 976nm,Wavelength Stabilized)
2. Above Data Test at 25°C, Unless otherwise stated.
3. Please avoid operation and storage in the condensation enviroment. If exceed operating temperature, the device lifetime will be inpacted.
4. Lifetime reduced if exceed nominal output power.

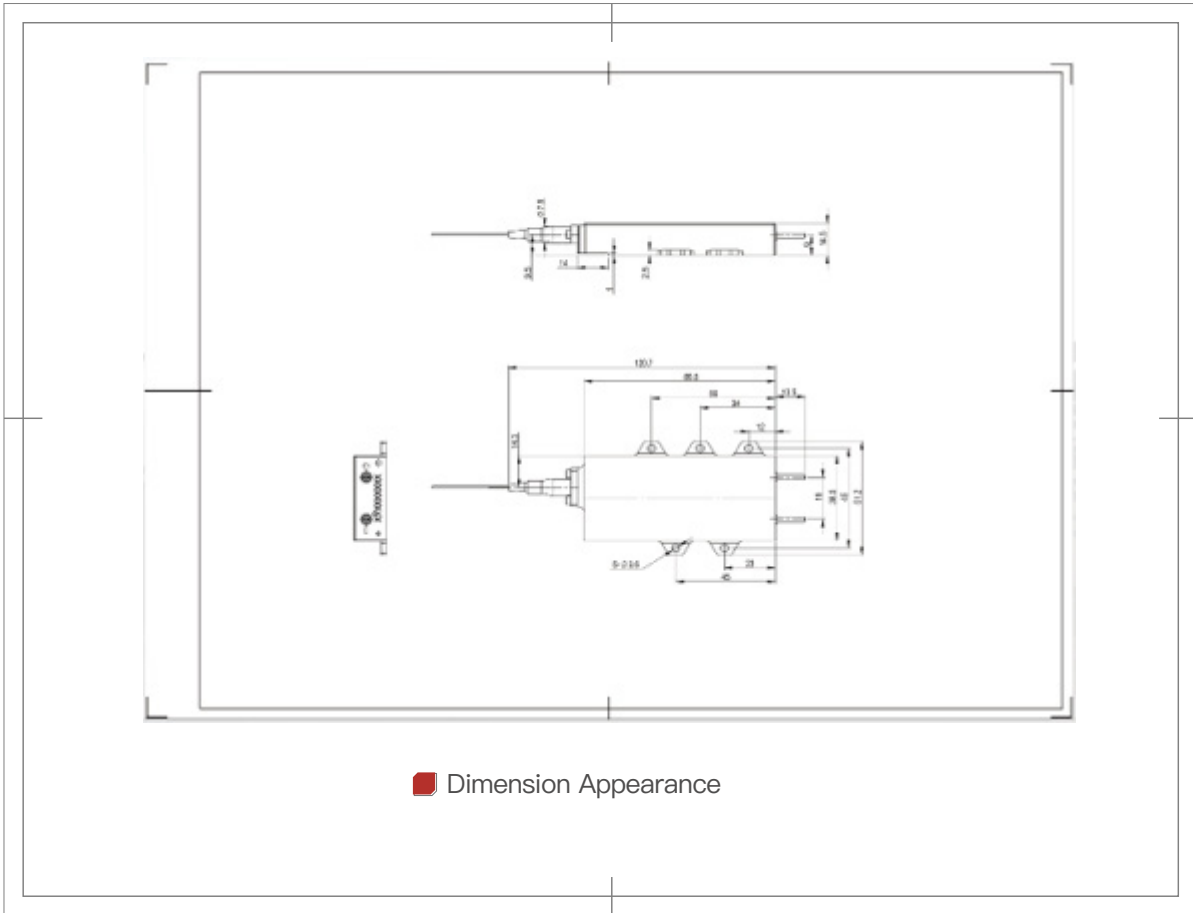

Application Area



R&D High Performance
Fiber Laser Pumping

Product Features



Full Range
Wavelength Locking



High Brightness, High Power



High E-O
Conversion Efficiency



Excellent SWaP



SUZHOU EVERBRIGHT PHOTONICS CO., LTD

No.56, Lijiang Road, SND, Suzhou, China

www.everbrightphotonics.com Sales@everbrightphotonics.com +86-512-66896988

Notice: Everbright keep improving its products to provide our customers with outstanding quality and reliability. We may change the specification and product description without notice at any time . For complete details, please contact Everbright sales representative.

