



1064nm fiber AOM (High power series)

Product Overview:	Acousto optic modulator is a kind of product that uses the principle of acousto-optic interaction to modulate the intensity and shift the frequency of laser. The wavelength range is from visible light to infrared region. It adopts all metal structure design, compact and solid sealed packaging structure, and innovative packaging technology, which ensure high reliability and temperature stability.				
Performance characteristics:	●Short response time ●Low insertion loss ●High extinction ratio ●High temperature stability and reliability ●Small size				
Application area:	●Q-switched fiber laser ●Laser Doppler coherent application ●Ultra fast laser frequency reduction menu ●Linear frequency modulation				
Ordering Information:	This indicator is a typical optical wavelength indicator, and other wavelengths and frequencies can be selected.				
Parameter	Unit	Single mode fiber is represented by "1", and single mode polarization maintaining fiber is represented by "1P".			
		SGTF120-1064-1FG SGTF120-1064-1PFG	SGTF150-1064-1FG SGTF150-1064-1PFG	SGTF200-1064-1FG SGTF200-1064-1PFG	SGTF300-1064-1PFG
Insertion loss	dB	<2.5	<3.5	<4.5	<5

Rise time	ns	<45	< 20	<12	<10
shift frequency	MHz	120	150	200	300
3dB frequency shift bandwidth	MHz	>20	>30	>40	>60
Wavelength	nm	1030-1080			
Optical power	W	$\leq 5W$			
On - off extinction ratio	dB	≥ 50			
Polarization extinction ratio (PM device)	dB	≥ 20			
Polarization dependent loss (SM device)	dB	<0.5			
Driving power	W	<2			
Fiber type	-	PM980、H11060 or others			
Optical fiber connector	-	FC/APC			
RF input joint	-	SMA			
Fiber length	m	>1			
Input impedance	Ω	50			
VSWR	-	<1.3:1			
Package	-	FG			

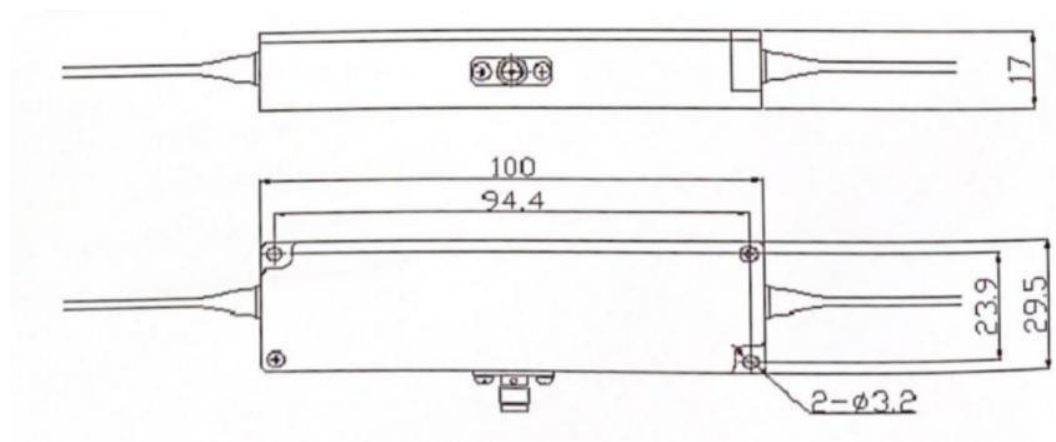


Package FG

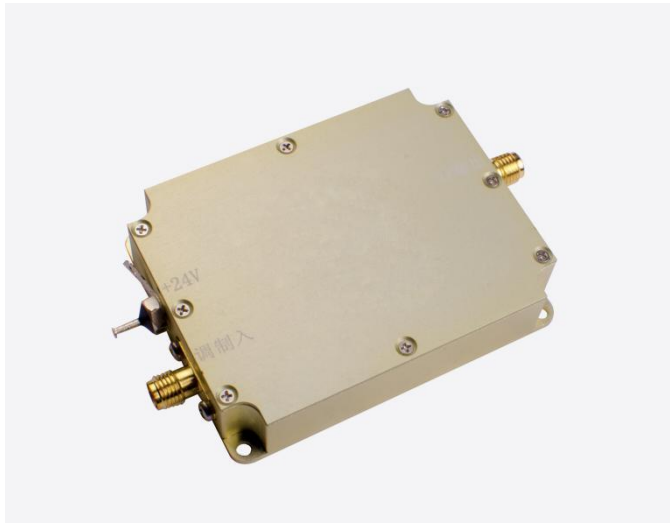


Low-power N-type acousto-optic driver

<p>Product Overview:</p>	<p>Product overview: acousto-optic driver is a RF driver that provides supporting functions for acousto-optic device products. It is applicable to acousto-optic modulator and frequency shifter products with driving power less than 3W. The RF signal generated by the driver is used to generate ultrasonic waves in the crystal of the acousto-optic device. The frequency and intensity of the RF signal applied will determine the degree to which the beam is modulated, deflected or tuned. The drive has good heat dissipation, and the use of matched drive will bring better temperature stability.</p>			
<p>Performance characteristics:</p>	<p>•Small size •Fast response time •Low power consumption •High temperature stability and reliability</p>			
<p>Supporting drive</p>	<p>-</p>	<p>Model (SGXXXX-33-N-ab) "X" - use "Y" for frequency shift function, and "T" for modulation function; "XXX" - operating frequency "33" refers to RF output power; "N" indicates the package type; "A" - use "1" for power supply voltage 24V, "2" for power supply voltage 12V; "b" - use "D" for digital TTL modulation, and "A" for analog modulation.</p>		
		<p>SGT120-33-N2-1D SGT120-33-N2-1A1 SGT120-33-N2-1A5</p>	<p>SGT150-33-N2-1D SGT150-33-N2-1A1 SGT150-33-N2-1A5</p>	<p>SGT200-33-N-1D SGT200-33-N-1A1 SGT200-33-N-1A5</p>
<p>Specifications of modulation input interface</p>				
<p>Modulated signal input</p>	<p>-</p>	<p>Digital modulation (high level 3.3-5V; low level 0-0.2V@1k Ω) Analog modulation (A1: 0-1V@50 Ω) Analog modulation (A5: 0-5V@1k Ω)</p>		

Interface	-	SMA			
RF output interface specification					
Output signal frequency	MHz	120	150	200	300
Frequency stability	ppm	20 (1 Special)			
Output signal power	W	<2			
Rise and fall time	ns	<25	<20	<10	<8
Switching ratio	dB	≥ 60			
Harmonic suppression ratio	dBc	>25			
Signal output standing wave ratio	-	≤ 1.3			
Interface	-	SMA			
Complete machine specification					
Maximum power consumption	W	10			
Working voltage	Vdc	24±1V (Optional 12±0.5V)			
Power interface	-	Through core capacitance (core wire is connected to positive, solder lug is connected to negative)			
Package	-	N/N2			

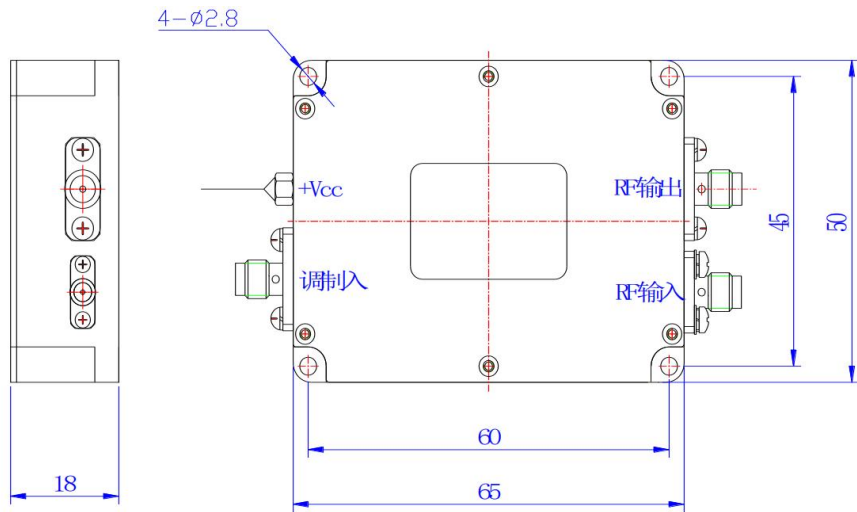

Package N

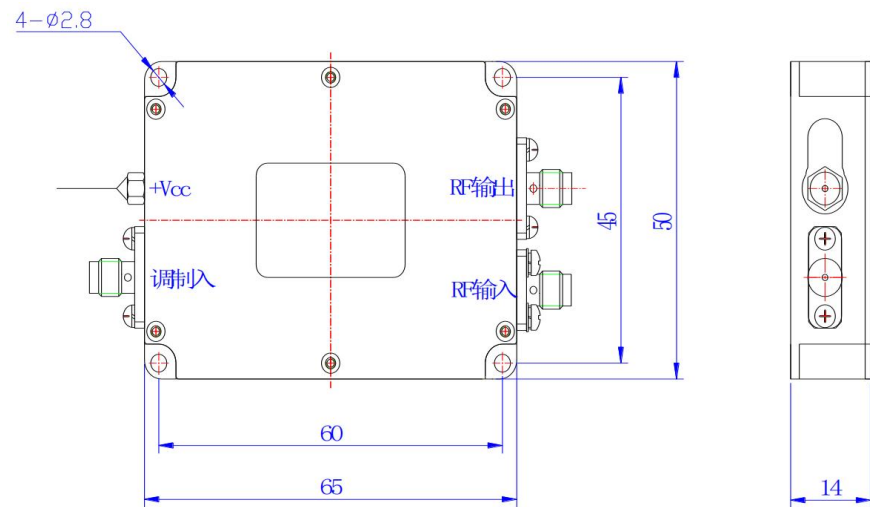

Package N2