




Packaged Modulators

Customizable packaged electro-optic unit



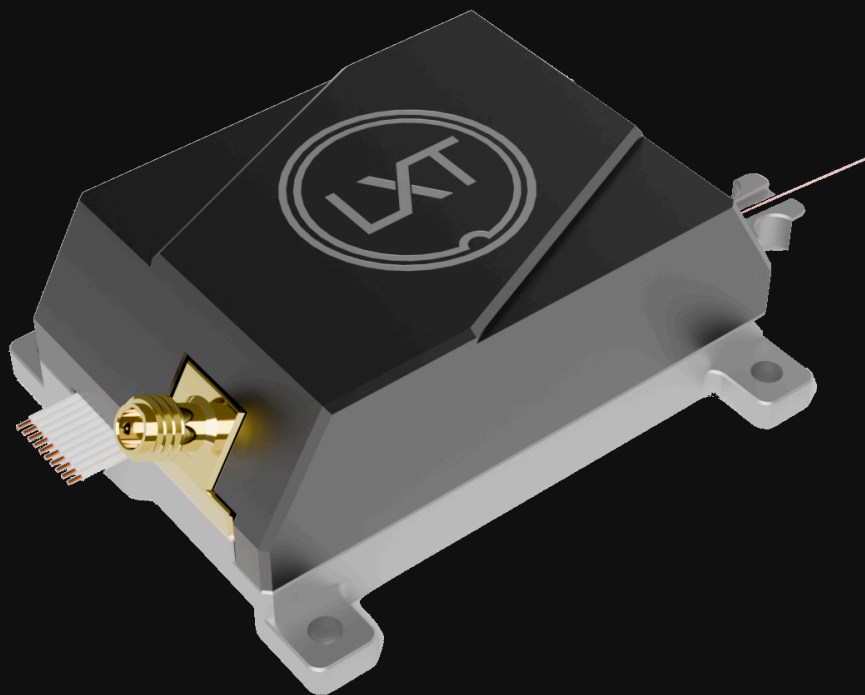

Specs

DEVICE PROPERTIES

Parameter

Specification

WORKING BANDWIDTH

110 GHz

HALF-WAVE VOLTAGE

3.5 V

EXTINCTION RATIO

> 30 dB

INSERTION LOSS

< 10 dB

OPTICAL BANDS

C/L/O

MECHANICAL PROPERTIES

Parameter	Specification
-----------	---------------

OPTICAL CONNECTION	FC/APC PM
--------------------	-----------

RF CONNECTION	1.0mm coaxial
---------------	---------------

DC CONNECTION	single pin array
---------------	------------------