

### General Description


KR Electronics 2321-SMA is a 300 Hz active lowpass filter. The filter has a 3 dB bandwidth of 300 Hz. Other passband frequencies are available. Please consult the factory.

### Features

- 300 Hz Active Lowpass Filter
- High Input Impedance
- Low Output Impedance
- $\pm 15$  Vdc Supply Required
- SMA Connectors
- Also available for PCB mounting

### Typical Performance

REF LEVEL / DIV MARKER 10.000Hz  
0.000dB 10.000dB MAG(UDF) 0.015dB

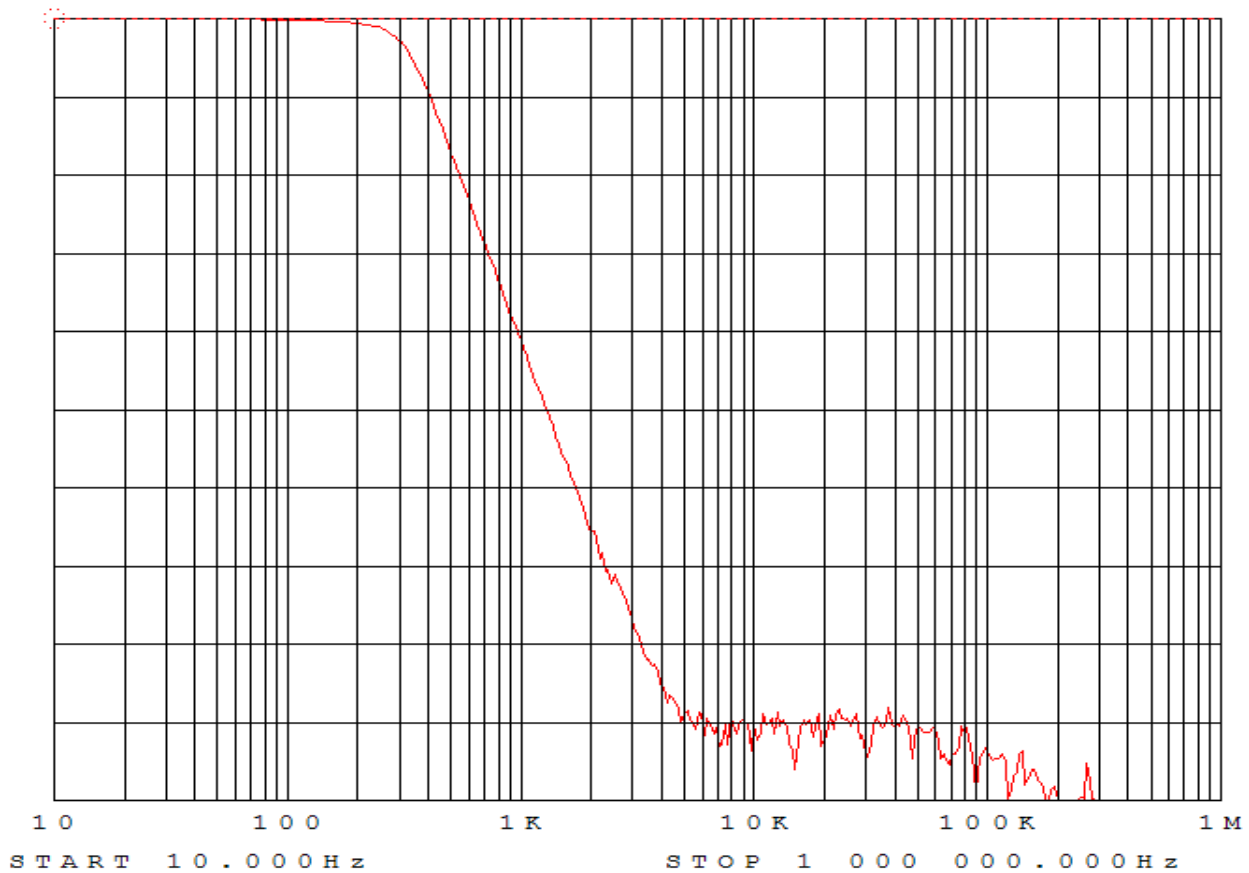

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900

# KR Electronics 2321-SMA

## Specifications

Parameter	Specification	Notes
Filter type	Active Lowpass	
Gain at 10 Hz	$0 \pm 0.1$ dB	
Loss at 300 Hz	$3 \text{ dB} \pm 1\text{dB}$	
Loss at 1000 Hz	approx 40 dB	
Supply Voltage	$\pm 15$ Vdc	

## Physical Dimensions

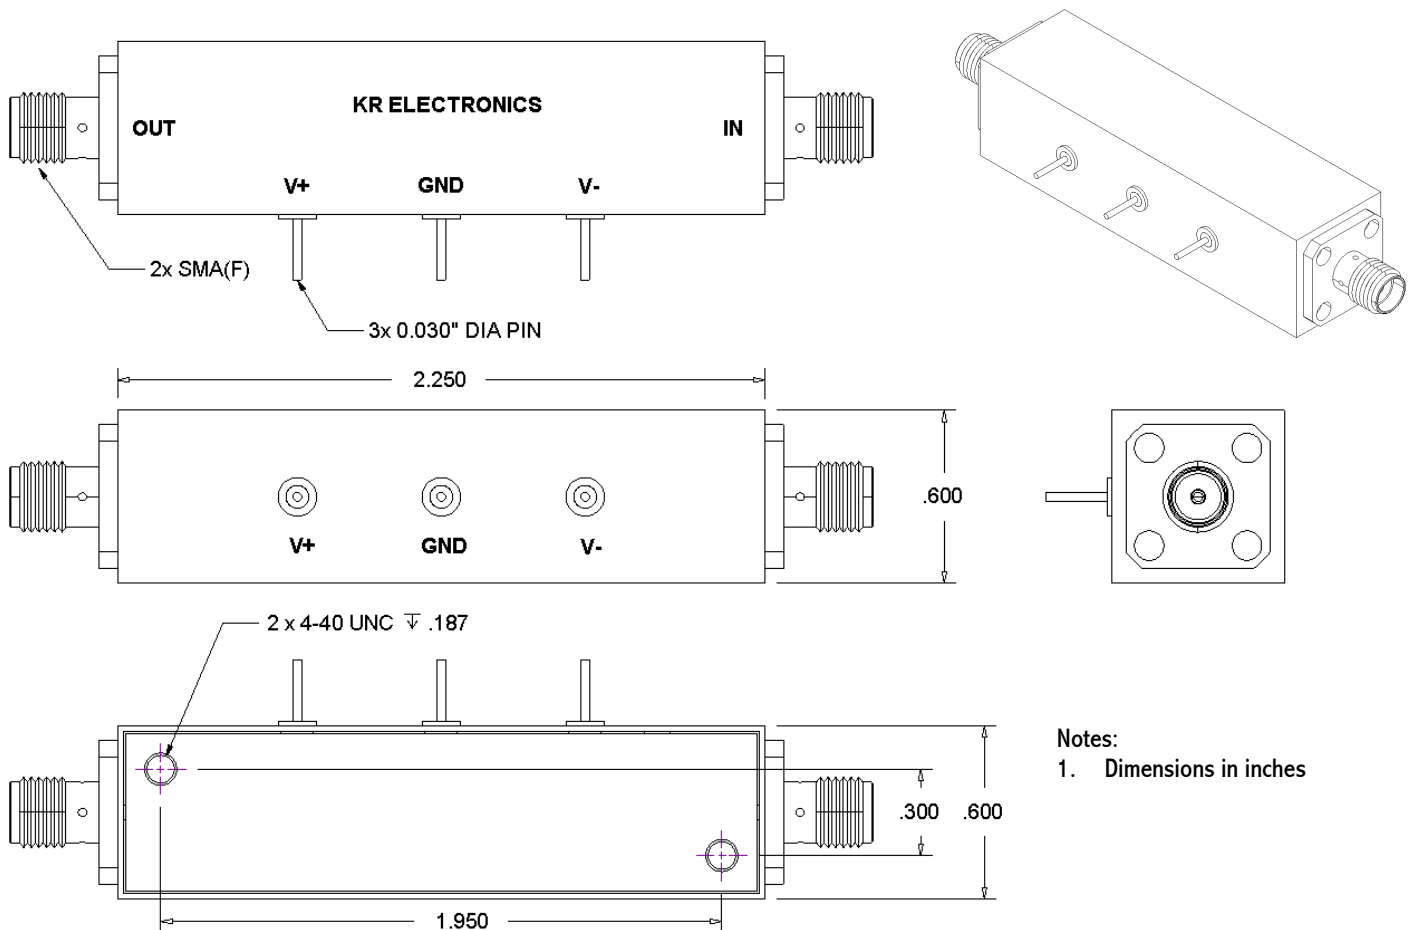

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982