

# KR 2482 Bandpass Filter

## General Description


KR 2482 is an 450 KHz bandpass filter. Other center frequencies can be specified.

### Features

- 450 KHz center frequency
- 50  $\Omega$

## Typical Measured Performance

**Overall Response & Return Loss**  
(5 dB/div)

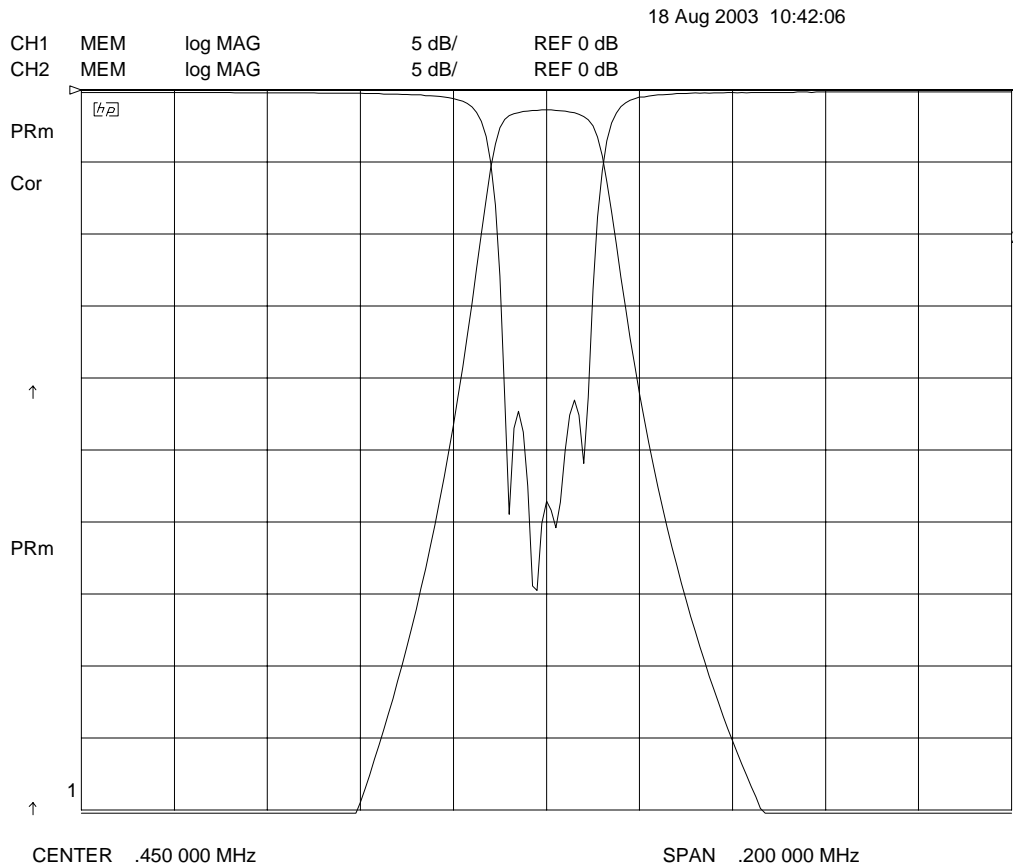

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web      www.krfilters.com  
Email    sales@krfilters.com  
Phone    (732) 636-1900  
Fax      (732) 636-1982

# KR 2482 Bandpass Filter

## Specifications

Parameter	Specification	Typical
Filter type	Bandpass	
Insertion Loss	< 3 dB	1.5 dB
Center Frequency	450 KHz	
Attenuation at 427.5 KHz	> 20 dB	26 dB
Attenuation at 445.5 KHz	< 3 dB	< 0.2 dB
Attenuation at 454.5 KHz	< 3 dB	< 0.2 dB
Attenuation at 472.5 KHz	> 20 dB	23 dB
Source and Load	50 Ω	Consult Factory for other

## Physical Dimensions

