

# KR Electronics, Inc.

## General Description


KR Electronics part number 2892-SMA is a 250 MHz bandpass filter. The filter has a typical 3 dB bandwidth of 50 MHz. Other passband frequencies are available. Please consult the factory.

## Features


- 250 MHz Center Frequency
- 50 MHz Typical 3 dB Bandwidth
- 50  $\Omega$  Source and Load
- SMA Connectors
- Also available in surface mount

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div and 10 nsec/div)

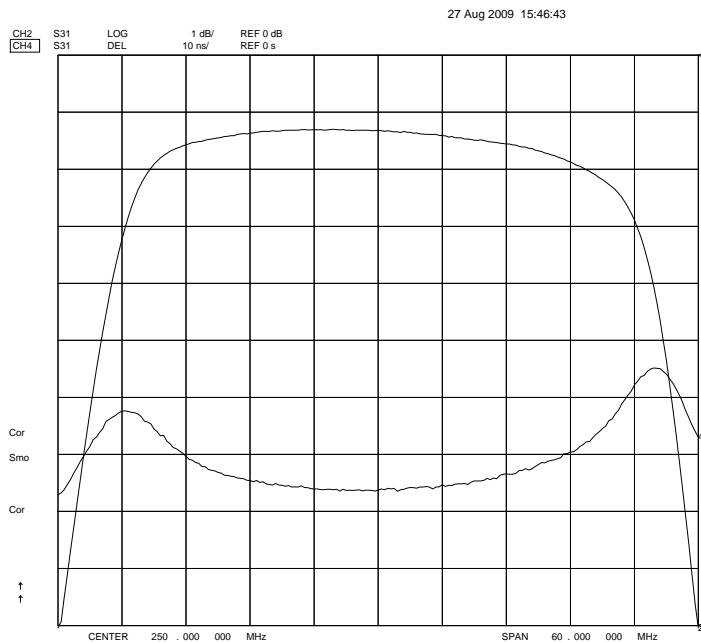

**Overall Response**  
(10 dB/div)

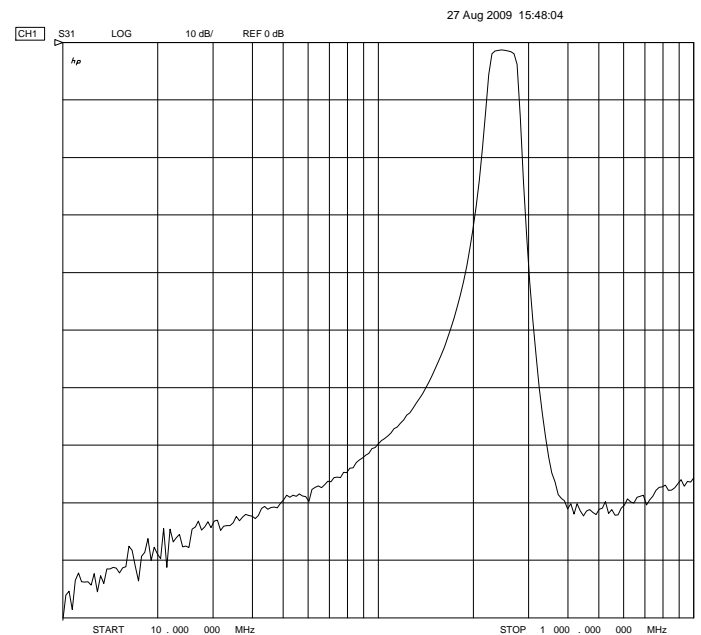

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2892-SMA

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	250 MHz
Insertion Loss	< 2.5 dB (1.5 dB typical)
3 dB Bandwidth	50 MHz typical
40 dB Bandwidth	111 MHz typical
60 dB Bandwidth	180 MHz typical
Source and Load	50 Ω

## Physical Dimensions

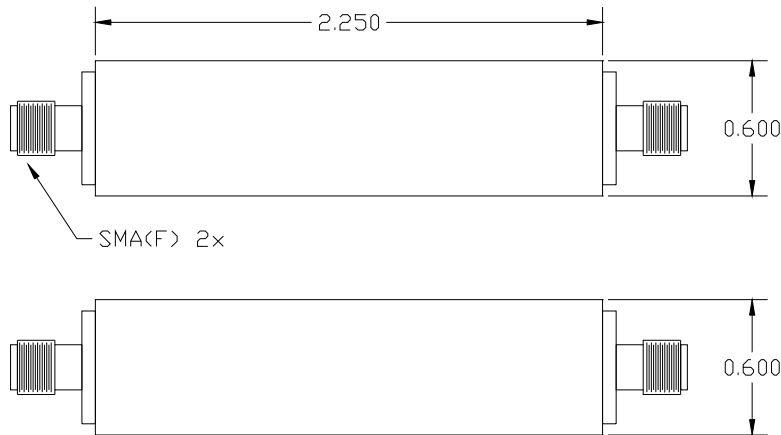

### Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available in surface mount package (1.0" x 0.5" x 0.3")

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982