

KR Electronics, Inc.

General Description


KR Electronics part number 2928-1 is an elliptic type low-pass filter. Other frequency are available.

Features


- 100 KHz Cutoff Frequency
- Flat passband response
- Elliptic Type Response
- 50 Ω Source & Load

Typical Performance

Passband Response
(1 dB/div & 5 usec/div)

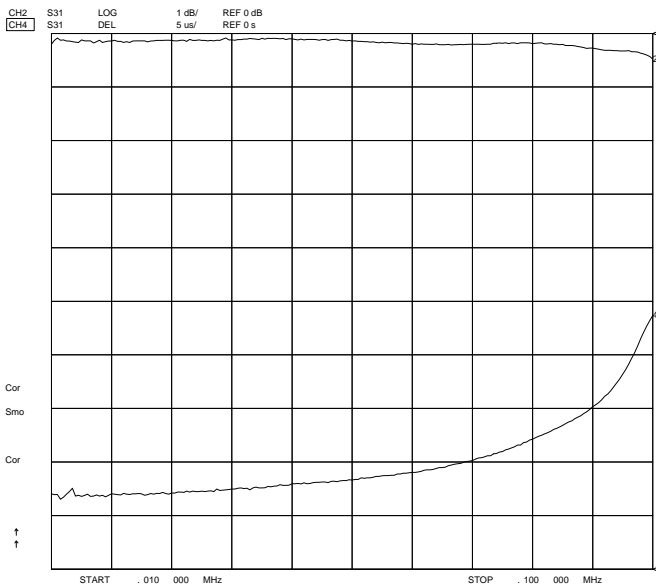

Overall Response
(10 dB/div)

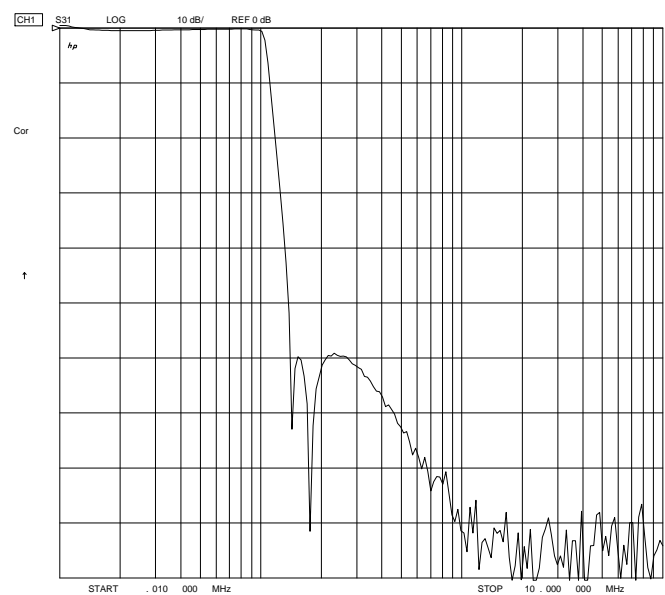

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2928-1

Specifications

Parameter	Specification
Filter type	Lowpass
Insertion Loss	< 1 dB
End of Passband (< 1 dB)	100 KHz
Start of Stopband (> 45 dB)	140 KHz
Source and Load	50 Ω

Physical Dimensions

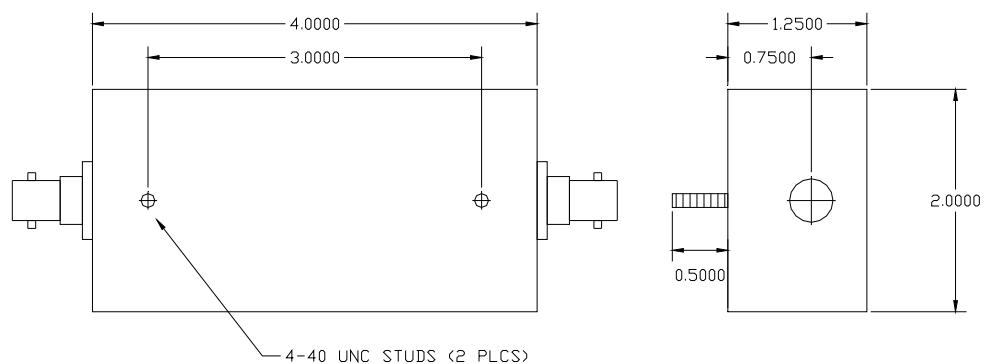

Notes:

1. Dimensions in inches
2. BNC(F) Connectors In/Out

Other connector options and case configurations available on request

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982