

# KR Electronics, Inc.

## General Description


KR Electronics part number 3053 is a 162 KHz notch filter.  
Please consult the factory for other frequencies.

### Features

- Notch filter
- 162 KHz Notch Frequency
- 50  $\Omega$
- SMA Connectors

## Typical Performance

**Overall Response**  
(10 dB/div)

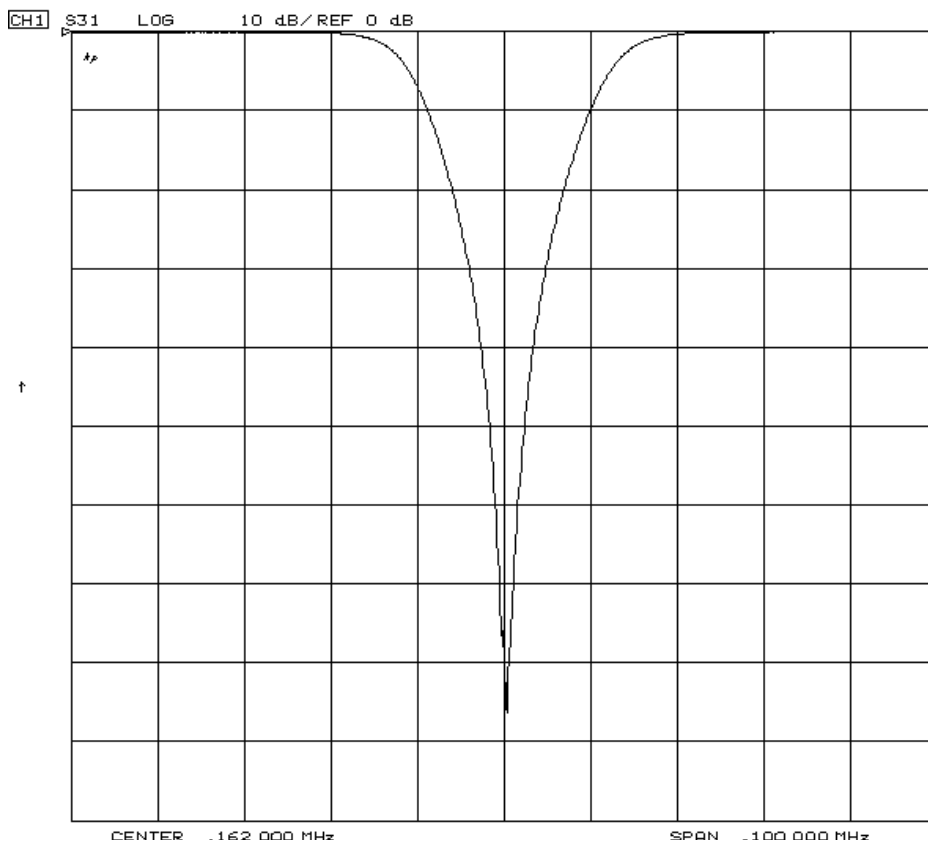

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 3053

## Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency	162 KHz	
3 dB Bandwidth	32.4 KHz max	26 KHz typical
40 dB Bandwidth	3.2 KHz min	5.98 KHz typical
Source and Load	50 Ω	

## Physical Dimensions

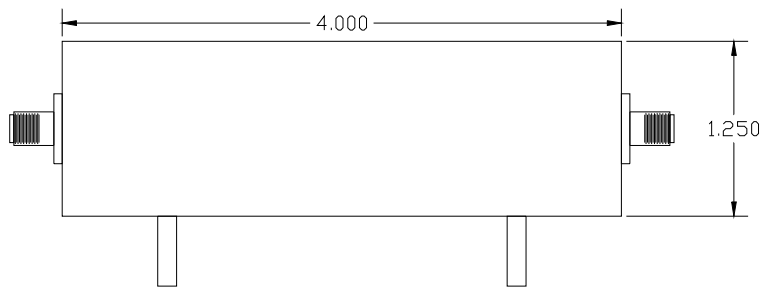

Notes:

1. Dimensions in inches
2. May be supplied in alternate case

