

MDL-N-1470/1000~3500mW



**INFRARED DIODE LASER
AT 1470nm**




Diode infrared laser module at 1470nm is made features of ultra compact, long lifetime and easy operating, which is used in measurement, communication, spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	1470±10	
Operating mode	CW	
Output power (mW)	>1000, 1500, 2000, ..., 3500	
Power stability (rms, over 4 hours)	<1%, <3%, <5%	
Transverse mode	Near TE ₀₀	
M ² factor	<20	
Beam divergence, full angle (mrad)	<3.0	
Beam diameter at the aperture (1/e ² ,mm)	5~8	
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	68.5	
Operating temperature (°C)	10~35	
Power supply (90-264VAC)	PSU-H-LED	PSU-H-FDA
TTL / Analog modulation	TTL or Analog with 1Hz-1kHz 1kHz-10kHz, 10kHz-30kHz optional	
Expected lifetime (hours)	10000	
Warranty period	1 year	

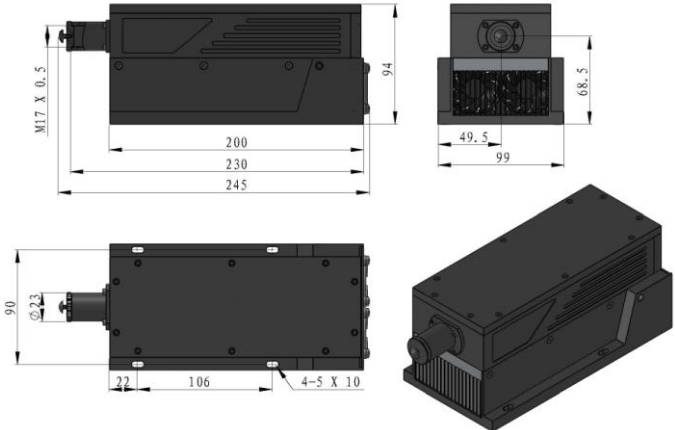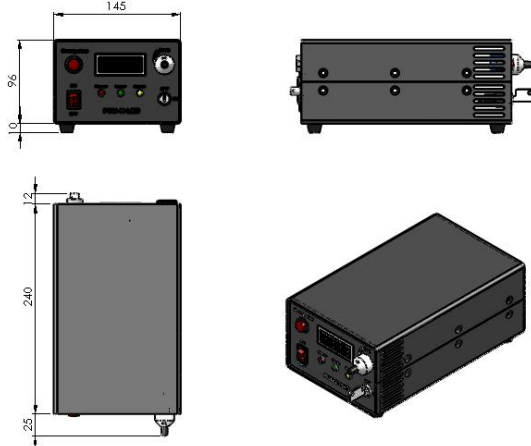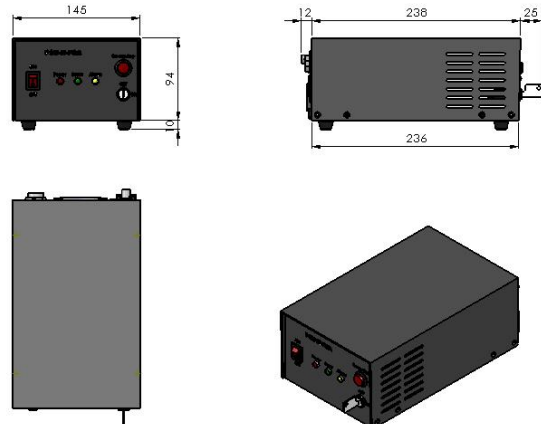

MxL-N-1470	PSU-H-LED	PSU-H-FDA
 <p>245 (L) ×99 (W) ×94 (H) mm³, 2.5 kg</p>	 <p>277 (L) ×145 (W) ×106 (H) mm³, 2.6 kg</p>	 <p>275 (L) ×145 (W) ×104 (H) mm³, 2.4 kg</p>