

LD4B-1625-FP-35

OVERVIEW

Laser diode coupled to an optical fiber and packaged into a hermetic case.

MAIN FEATURES

- Wavelength: 1625 nm
- Cavity type: Fabry-Perot
- Optical power in CW mode in single-mode fiber: typ. 35 mW
- Package types: coaxial, coaxial with bracket, 14 pins DIL, 14 pins BTF
- Built-in monitor photodiode

ORDERING INFORMATION

LD4B-1625-FP-35-X-X-X-X-X-X

Case type

COAX: compact coaxial (low duty cycle pulse mode only)
COAXB: compact coaxial with a bracket
TH: compact coaxial with a bracket compatible to Thorlabs mount
DIL: common 14-pins DIL for active thermal stabilization (TEC and thermistor)
DILRAD: 14-pins DIL for active thermal stabilization (TEC and thermistor) with wall radiator
BTF: 14-pins BTF type 1 (Pump) for active thermal stabilization (TEC and thermistor)

Pinout code

1: see more details on page 5

Fiber type

SM1: SM, G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing Ø0.9 mm or **BSM1** Ø0.25mm
SM3: SM, G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing Ø0.9 mm or **BSM3** Ø0.25mm
SMP13: PM, [Corning PM1300](#), PANDA type, furcation tubing Ø0.9 mm
MM5: MM, [50/125.OM3](#), furcation tubing Ø0.9 mm
MM6: MM, [62.5/125.OM1](#), furcation tubing Ø0.9 mm
 Other type on request

Connector type

FU: FC/UPC (SM1, SM3)
FA: FC/APC (SM1, SM3, SMP13)
SU: SC/UPC (SM1)
SA: SC/APC (SM1)
N: no connector (scissors cut)
 Other type: on request

Test measurements

CW: CW mode (electro-optical parameters at T=25+/-5 C and spectrum)
P: Pulse mode (pulse duration 5 us, duty cycle 0.5%, at T=25+/-5 C)
CWP: both CW and pulse mode

Fiber length

0.5: 500+/-50 mm
1.0: 1000+/-100 mm
 Other length on request

LD4B-1625-FP-35

ABSOLUTE MAXIMUM RATINGS

Parameter		Value	Unit	Conditions
Laser diode CW forward current	I _{max}	350	mA	CW, T = 25°C
Laser diode pulse forward current	I _{pmax}	700	mA	Pulse, 5 us, duty cycle 1%, T = 25°C
Laser diode reverse voltage	V _{RL}	2	V	
Laser diode forward voltage	V _{FL}	2.5	V	
Photodiode reverse voltage	V _{RP}	30	V	
Operating temperature*	T _{op}	0 - +60	°C	Coaxial package
Operating temperature*	T _{op}	-40 - +60	°C	DIL, BTF (T _{st} = 25°C)
Storage temperature	T _{stg}	-40 - +85	°C	
Soldering temperature	T _{sold}	260	°C	Max. 5 seconds






*Operating temperature is defined by the case temperature. It is necessary to ensure sufficient heat dissipation so that the module's maximum operating temperature is not exceeded. Operation at elevated temperatures reduces the lifetime of the laser diode.

Operating temperature for the DIL, DILRAD and BTF 14-pins case T with TEC is defined for internal temperature stabilization at T_{st} = 25°C that corresponds to thermistor resistance R_t = 10 kOhm.


LD4B-1625-FP-35**ELECTRICAL-OPTICAL CHARACTERISTICS (T = 25 °C)**

Parameter		MIN	TYP	MAX	Unit	Conditions
Optical power (CW)	P_{cw}	30	35		mW	CW, $I_{op} = 300$ mA, SM1
Optical power (Pulse)	P_p	60	70		mW	Pulse, $I_p = 600$ mA, duration 5 μ s, duty cycle 0.5%, SM1
Mean wavelength	λ	1610	1625	1640	nm	CW, $I_{op} = 300$ mA
Spectral width, OSA	$\Delta\lambda$		8	12	nm	CW, $I_{op} = 300$ mA, OSA
Wavelength-temperature coefficient	$d\lambda/dT$		0.4		nm/°C	CW, $I_{op} = 300$ mA, OSA
Threshold current	I_{th}		25	50	mA	CW
Slope efficiency	S_e	0.12	0.15		mW/mA	CW, SM1
Polarization extinction ratio	PER	17			dB	SMP13
Operating voltage	V_{op}		1.5	2.5	V	CW, $I_{op} = 300$ mA
Monitor current	I_m	0.2	0.7	2.0	mA	CW, $I_{op} = 300$ mA, $V_r = 5$ V

LD4B-1625-FP-35

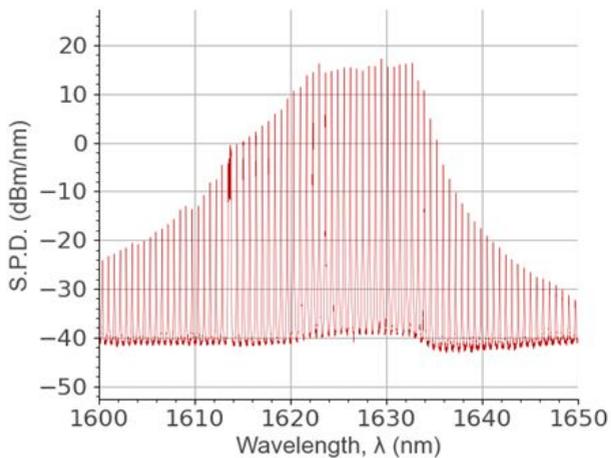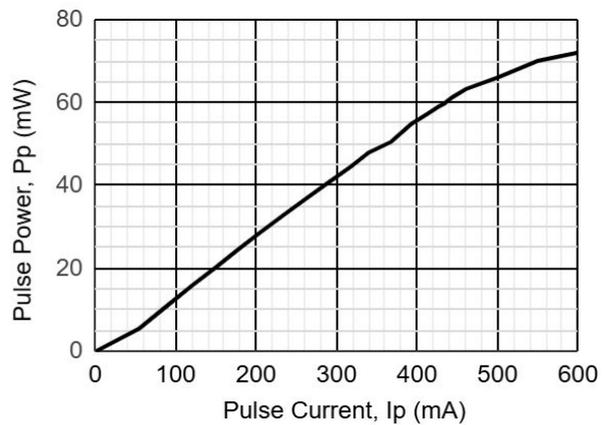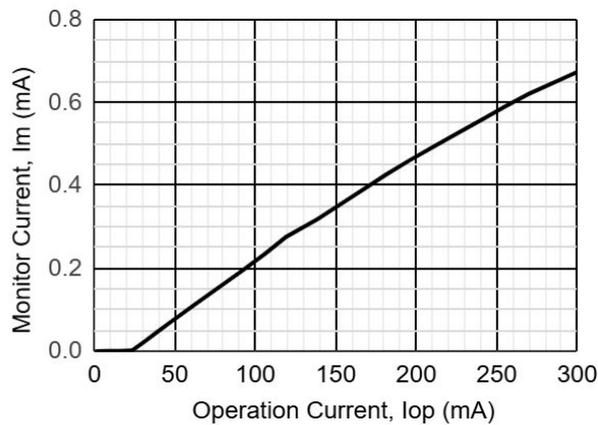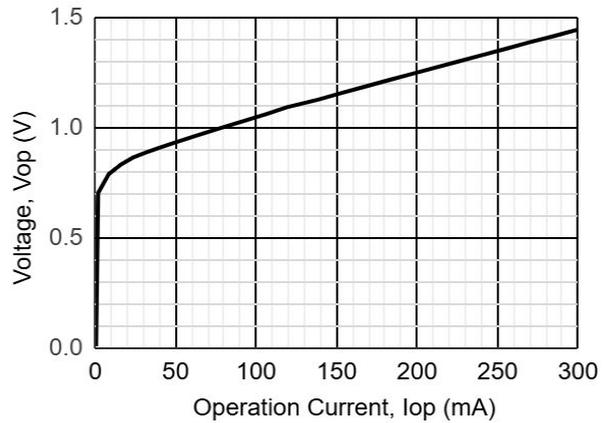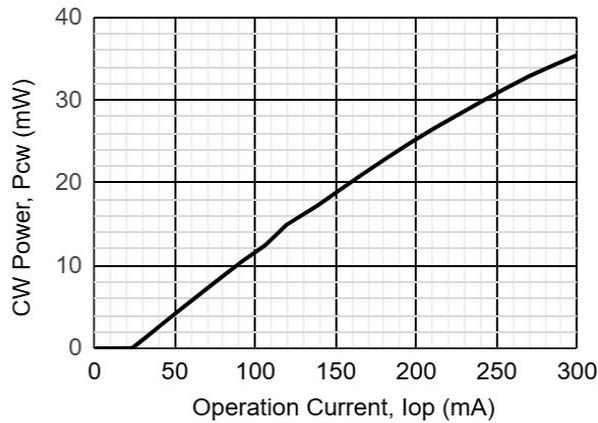


LD4B-1625-FP-35

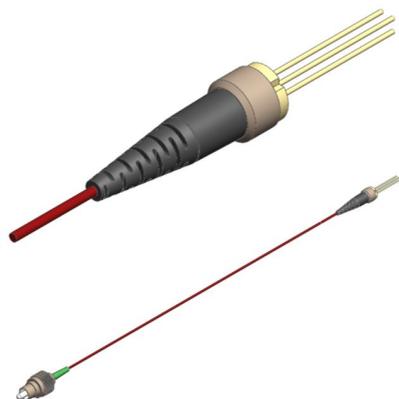


COAX

BACK VIEW






PINOUT

#1




Download more information

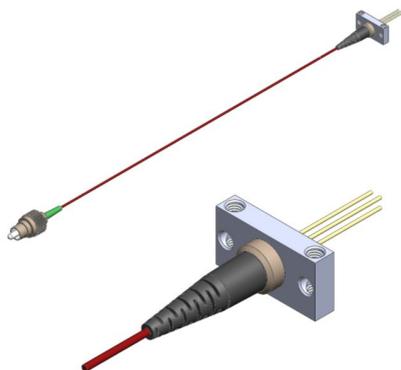


COAXB

BACK VIEW



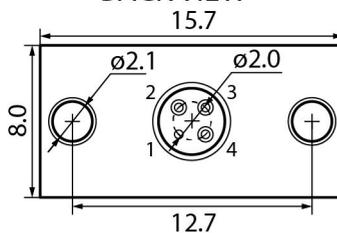


PINOUT

#1




Download more information

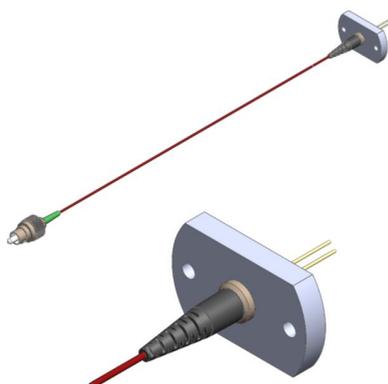

PACKAGE TH


BACK VIEW

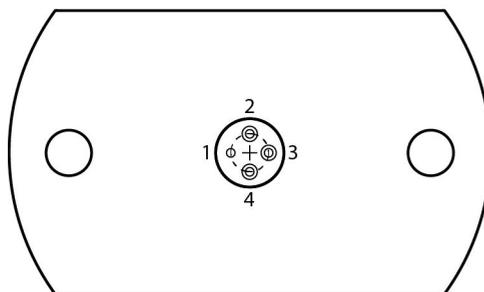

PINOUT


#1

Thorlabs Pin Code D




Compatible to Thorlabs LDM9LP mount


Download more information



LD4B-1625-FP-35

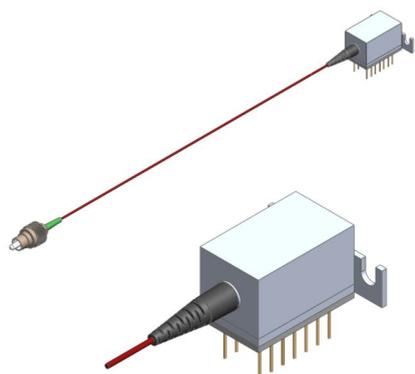

DIL

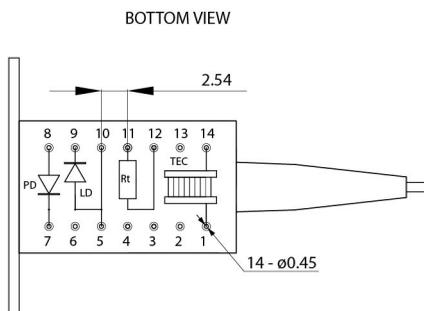

PINOUT #1, #9, #12, #14

- 1.TEC Anode
- 2.-
- 3.-
- 4.-
- 5.LD Anode
- 6.-
- 7.PD Cathode
- 8.PD Anode
- 9.LD Cathode
- 10.LD Anode
- 11.Thermistor
- 12.Thermistor
- 13.-
- 14.TEC Cathode


TEC HP: $I_{max}=1.4A$, $U_{max}=3.9V$, $Q_{max}=3.3W$,
 $ACR=2.0\Omega$, $\Delta T_{max}=69K$

Thermistor:
 $R_t=10 \cdot \exp(3600 \cdot (1/T[K]-1/298))$ kOhm

Download more information




Drawing




3D model



Application Notes

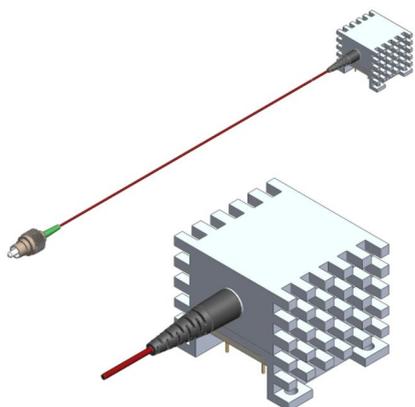

DILRAD

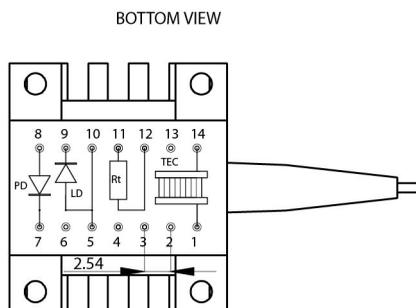

PINOUT #1, #9, #12, #14

- 1.TEC Anode
- 2.-
- 3.-
- 4.-
- 5.LD Anode
- 6.-
- 7.PD Cathode
- 8.PD Anode
- 9.LD Cathode
- 10.LD Anode
- 11.Thermistor
- 12.Thermistor
- 13.-
- 14.TEC Cathode


TEC HP: $I_{max}=1.4A$, $U_{max}=3.9V$, $Q_{max}=3.3W$,
 $ACR=2.0\Omega$, $\Delta T_{max}=69K$

Thermistor:
 $R_t=10 \cdot \exp(3600 \cdot (1/T[K]-1/298))$ kOhm

Download more information




Drawing




3D model



Application Notes

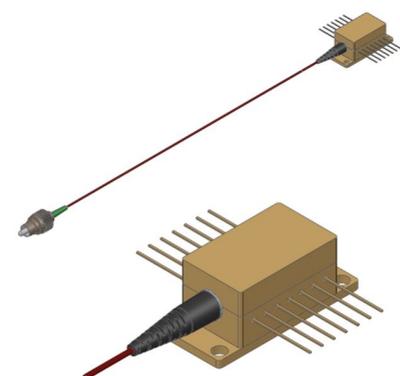

BTF

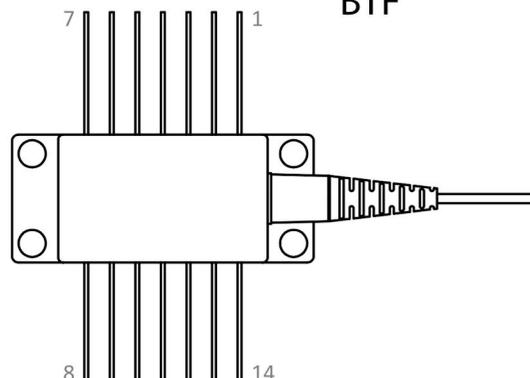


- 1. TEC+
- 2. Thermistor
- 3. NC
- 4. NC
- 5. Thermistor
- 6. NC
- 7. NC
- 8. NC
- 9. NC
- 10 LD/SLD Anode
- 11. LD/SLD Cathode
- 12. NC
- 13. Case Ground
- 14. TEC -


TEC HP: $I_{max}=1.4A$, $U_{max}=3.9V$, $Q_{max}=3.3W$,
 $ACR=2.0\Omega$, $\Delta T_{max}=69K$

Thermistor:
 $R_t=10 \cdot \exp(3600 \cdot (1/T[K]-1/298))$ kOhm

Download more information



Drawing



3D model



Application Notes

LD4B-1625-FP-35

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

Safety and handling cautions

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximum ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

Conflict Minerals Policy Statement

LD4B achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

RoHS Compliance Statement

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LD4B hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

REACH Compliance Statement

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LD4B hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LD4B does not manufacture or import any substances or preparations as defined under REACH.